




Dimensions



41-763



Detection

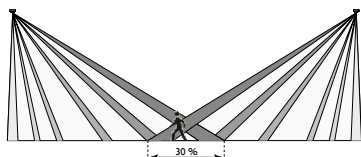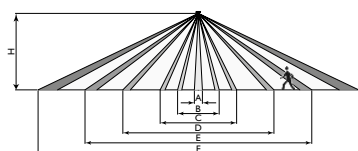

Height (H)	4 m	5 m	6 m	7 m	8 m
A	Ø0,20	Ø0,25	Ø0,30	Ø0,40	Ø0,50
B	Ø2,00	Ø2,50	Ø3,00	Ø3,50	Ø4,00
C	Ø3,70	Ø4,70	Ø5,50	Ø7,00	Ø7,50
D	Ø6,50	Ø8,50	Ø10,00	Ø11,50	Ø14,00
E	Ø11,00	Ø14,00	Ø17,00	Ø20,00	Ø22,00
F	Ø16,00	Ø20,00	Ø24,00	Ø28,00	Ø32,00

Technical data

Input

Supply voltage

Via the DALI bus

Power consumption

5,5 mA

Performance

Detection area

(3x120°) 360°

Detection range for body movement

Ø16-32 m

Installation height

4 – 8 m

Sensitivity

4 settings

Protection class

IP 54

Colour

Ral 9010 (White)

Ambient temperature

-5°C to +50°C

Approval

CE according to

EN 60669-2-1



High ceiling detector 360° Slave, DALI

– for indoor lighting control

- For surface mounting on ceiling
- Used together with Master detector type 41-760, 41-761, 41-784 and 41-785
- Extends the detection range to all abovenamed Master detectors
- Plug & Play – no programming
- Rapid and flexible installation with DALI addressable bus
- Detection angle 360° or 3x120° with individual sensitivity
- Settings via Niko Sensor Tool app or IR remote control
- Protection class IP 54

The high ceiling detector slave 41-763 is designed for mounting on the ceiling and for connection to Master detector type 41-760, 41-761, 41-784 and 41-785.


The detector extends the detection range to all abovenamed Master detectors.

Easy installation, since the DALI is used as a master/slave connection, meaning that separate installation is not necessary.

Settings

Via Niko Sensor Tool app and IR remote control settings of sensitivity is possible and walk-test can be activated.

Connection diagram

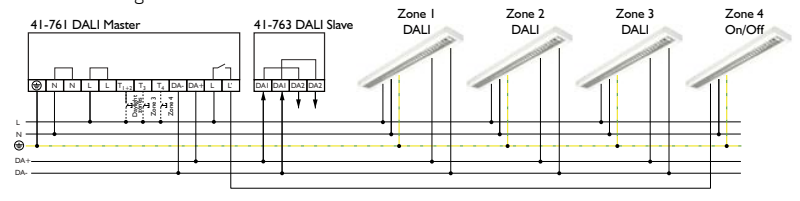

Order numbers

Product	Type	EAN no.
DALI Slave, high ceiling	41-763	5703102 208996
IR-remote control	41-934	5703102 208927
IR-dongle - smartphone	41-936	5703102 209542