

PD 360/8 BASIC SMB

Order description


PD 360/8 Basic SMB

Item number

EB10430480

GTIN

4015120430480



Product description

- Presence detector with 360° field of detection For ceiling mounting
- Range of up to 8 m in the diameter at a recommended installation height of 3 m
- 10 A high-performance relay
- Zero-cross switching for gentle switching
- Factory setting for immediate operational readiness

Technical data


| GENERAL | |
|---------------------------------|------------------------------|
| Conformity | CE, RoHS, WEEE |
| Warranty | 5 years |
| ATTACHMENT | |
| Installation type | Surface mounting |
| Installation position | Ceiling |
| HOUSING | |
| Dimensions | Height/Depth 50 mm, Ø 101 mm |
| Weight | 114 g |
| Material | UV-stabilised polycarbonate |
| Protection type | IP40 |
| Permissible ambient temperature | 0 °C...+50 °C |
| Relative humidity | 5 - 93 %, non-condensing |
| Colour | white, similar to RAL 9010 |
| Connection | 4.0 mm ² |
| ELECTRICAL VERSION | |
| Protection class | II |
| Nominal voltage | 230 V / 50 Hz |
| Power consumption | 0,2 W |
| In-rush current | 78 A / 5 ms |
| SENSORS | |
| Detection angle | 360° |
| Detection range diagonally | Ø 8 m |
| Detection range head-on | Ø 6 m |

| Detection range presence | Ø 4 m |
|--|---|
| Field of detection | up to 50 m ² |
| Recommended installation height | 3 m |
| Max. mounting height | 5 m |
| Light measurement | mixed light |
| Level of brightness | 5 - 2000 lx |
| Number of light channels | 1 |
| Push button input lighting | 1 |
| Push button input HVAC | false |
| Slave input | No |
| Number of parallel switchable detectors | 6 |
| Fully automatic | yes |
| Semi-automatic | yes |
| Impulse feature | yes |
| constant lighting control | false |
| Switching delay from "dark to light" [s] | 300 s |
| Switching delay from "light to dark" [s] | 30 s |
| CONTROL | |
| Channel 1 | Lighting |
| Interface | Switching |
| Contact | make contact/non-floating |
| Switching capacity channel 1 | 230 V AC 50 Hz, 2300 W/10 A (cos # = 1), 1150 VA/5 A (cos # =0.5) |
| Switch-off delay time | impulse/approx. 15 sec. to 30 min. |
| Master/slave function | false |
| constant lighting control | false |
| Manual override | yes |


PD 360/8 BASIC SMB

| Order description | Item number | GTIN |
|--------------------|-------------|---------------|
| PD 360/8 Basic SMB | EB10430480 | 4015120430480 |

Scale drawing




Field of detections



- Operating area approx. \varnothing 4 m
- Head-on to detector approx. \varnothing 6 m
- Passage area / diagonally to detector approx. \varnothing 8 m

Circuit diagram

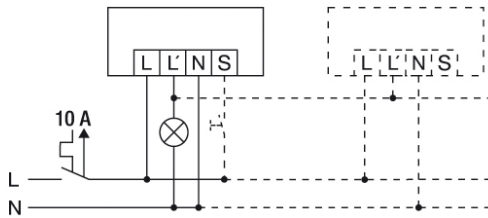

Standard operation with additional control by means of a closing button. If required, the light can be manually switched on or off with the button. To extend the field of detection, the detectors can be connected in parallel.