### DATA SHEET

# **ESYLUX**•

IP 54

IP 20

### PD-C 360/24 Slave WH

#### **Order description**

PD-C360/24 slave WH

Item number EP10425790

4015120425790

GTIN



230 V ~



32 1 4 m 32 1 4 m 32 1 4 m

# • "Slave" presence detector for extending the field of detection of a "master" presence detector with 360° field of detection for ceiling mounting

- range of up to 32 m, elliptic detection range of 32 m in length and 4 m in width, at an installation height of 10 m (maximum installation height approximately 15 m)
- For cost-effective system upgrade, up to 10 "slave" presence detectors can be connected to a "master"
- Ideal for use in areas with ceilings of up to approx. 15 msuch as warehouses etc.
- Connection of the "Slave" detector to many presence detectors of the PD-C series possible

#### Technical data

GENERAL			
Conformity	CE, RoHS, WEEE		
Warranty	5 years		
ATTACHMENT			
Installation type	Recessed mounting		
Installation position	Ceiling		
Installation dimension	Installation depth: 24 mm, Ø 60 mm		
HOUSING			
Dimensions	Height/Depth 70 mm, Ø 108 mm		
Weight	177 g		
Material	UV-stabilised polycarbonate		
Protection type	recessed-mounted IP20, IP20/IP54 with surface-mounted box (order separately), IP20 as recessed ceiling-mounted version (order installation set separately)		
Permissible ambient temperature	-25 °C+50 °C		
Relative humidity	5 - 93 %, non-condensing		
Colour	white, similar to RAL 9010		
Connection	2,5 mm² / 1,5 mm²		
ELECTRICAL VERSION			
Protection class	ll		
Nominal voltage	230 V / 50 Hz		
Power consumption	0,3 W		


SENSORS	
Detection angle	360°
Detection range diagonally	Ø 32 m
Detection range head-on	Ø 11 m
Field of detection	up to 805 m²
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	none
Push button input HVAC	false
Slave input	yes
Fully automatic	yes
Semi-automatic	yes
Impulse feature	yes
constant lighting control	false
Switching delay from "dark to light" [s]	0 s
Switching delay from "light to dark" [s]	30 s
CONTROL	

••••••••	
Channel 1	Presence
Interface	Not relevant
Contact	Bus system
Switch-off delay time	Not relevant
Master/slave function	false
constant lighting control	false
Manual override	No

# DATA SHEET

#### PD-C 360/24 Slave WH

Order description	Item number	GTIN
PD-C360/24 slave WH	EP10425790	4015120425790

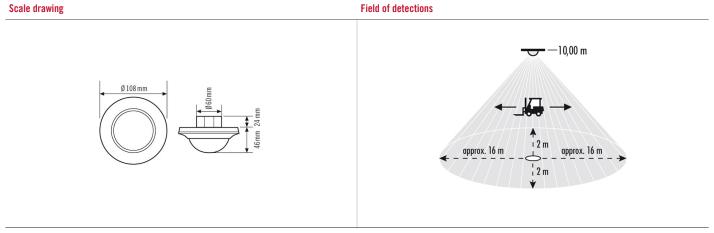

Passage area / diagonally to detector