

R&S® FSH HANDHELD SPECTRUM ANALYZER

Specifications



Specifications
Version 33.00

ROHDE & SCHWARZ
Make ideas real



CONTENTS

Definitions	4
Specifications	5
Frequency	5
Sweep time.....	6
Bandwidths.....	6
Level.....	6
Trigger functions.....	8
Inputs and outputs.....	9
Vector network analysis/vector voltmeter	11
<i>R&S®FSH4/R&S®FSH8, models .24/.28 with R&S®FSH-K42/R&S®FSH-K45 options</i>	11
<i>R&S®FSH13/R&S®FSH20, models .23/.30 with or without option R&S®FSH-K45 option</i>	13
Scalar network analysis	15
<i>R&S®FSH4/R&S®FSH8, models .24/.28 without R&S®FSH-K42 option</i>	15
Distance-to-fault analysis.....	16
<i>R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, models .24/.28/.23/.30 with R&S®FSH-K41 option</i>	16
R&S®FSH-K29 pulse measurements with power sensor.....	16
R&S®FSH-K10 GSM EDGE measurement application.....	17
R&S®FSH-K44 3GPP WCDMA BTS/NodeB pilot channel and pilot EVM measurement application; R&S®FSH-K44E 3GPP WCDMA BTS/NodeB code domain power and EVM measurement application with HSDPA/HSPA+ analyzer	18
R&S®FSH-K46 CDMA2000 BTS pilot channel and EVM measurement application; R&S®FSH-K46E CDMA2000 BTS code domain power measurement application.....	20
R&S®FSH-K47 1xEV-DO® BTS pilot channel and EVM measurement application; R&S®FSH-K47E 1xEV-DO® BTS PN scanner and time domain power measurement application	22
R&S®FSH-K48 3GPP TD-SCDMA BTS power and P-CCPCH EVM measurement application; R&S®FSH-K48E 3GPP TD-SCDMA/HSDPA BTS code domain power and EVM measurement application	23
R&S®FSH-K50/R&S®FSH-K51 LTE FDD/TDD downlink pilot channel and EVM measurement application; R&S®FSH-K50E/R&S®FSH-K51E LTE FDD/TDD downlink extended channel and modulation measurement application	25
R&S®FSH-K56 NB-IoT measurement application (for FDD LTE)	26
R&S®FSH-K105 EMF measurement application	27
R&S®FSH-K43 receiver mode and channel scan measurement application.....	28
General data.....	29
Equivalence of specifications for different R&S®FSH part numbers.....	30
Accessories	31
<i>R&S®FSH-Z14 directional power sensor</i>	31
<i>R&S®FSH-Z44 directional power sensor</i>	33
<i>R&S®HA-Z240 GPS receiver</i>	34
<i>R&S®FSH-Z114 precision frequency reference</i>	34

Ordering information	35
Options	36
Accessories	37
<i>Power sensors supported by the R&S®FSH-K9 option</i>	<i>38</i>
<i>Optical power sensors and accessories</i>	<i>39</i>
<i>Antenna and accessories</i>	<i>39</i>
Warranty and service	40

Definitions


General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

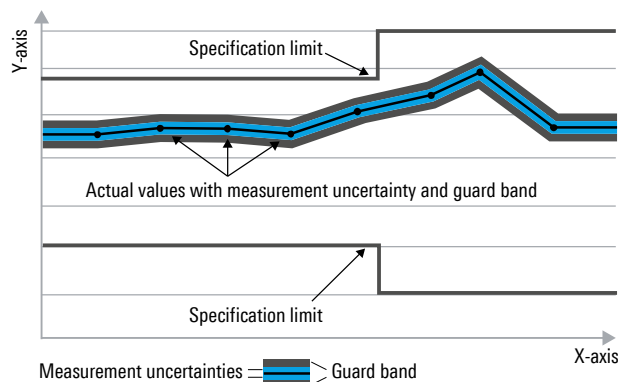

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Specifications

Specifications apply under the following conditions:

15 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to.
Data without tolerances: typical values only. Data designated as “nominal” applies to design parameters and is not tested.
Data without tolerance limits is not binding.

Frequency

Frequency range	R&S®FSH4, models .04/.14	9 kHz to 3.6 GHz
	R&S®FSH8, models .08/.18	9 kHz to 8 GHz
	R&S®FSH4, model .24	100 kHz to 3.6 GHz
	R&S®FSH8, model .28	100 kHz to 8 GHz
	R&S®FSH13, models .13/.23	9 kHz to 13.6 GHz
	R&S®FSH20, models .20/.30	9 kHz to 20 GHz
Frequency resolution		1 Hz

Reference frequency, internal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +50 °C ¹	1×10^{-6}
Achievable initial calibration accuracy		5×10^{-7}
Total reference uncertainty		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Reference uncertainty	+20 °C to +30 °C	$< 2 \times 10^{-6}$ + aging, typ. 1×10^{-6} + aging
Reference frequency, with R&S®HA-Z240 GPS receiver option		
Frequency uncertainty	GPS on, ≥ 1 min after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 min after losing satellite lock	$\pm 5 \times 10^{-8}$
Reference frequency, with R&S®FSH-Z114 precision frequency reference option		
Aging per year		3.6×10^{-9}
Temperature drift	0 °C to +50 °C	4×10^{-10}
Achievable initial calibration accuracy		1×10^{-9}
Total reference uncertainty	R&S®FSH-Z114 connected	
	≥ 30 s after oscillator lock	(time since last adjustment × aging rate) + temperature drift + 3 × calibration accuracy (nominal)
	≥ 2 min after oscillator lock	(time since last adjustment × aging rate) + temperature drift + calibration accuracy

Frequency readout		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1) + 1 \text{ Hz}))$
Number of sweep (trace) points		631
Marker tuning frequency step size		span / 630
Frequency counter resolution	selectable	0.1 Hz (low), 0.1 mHz (high)
Count uncertainty	SNR > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} \times (\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 3.6/8/13.6/20 GHz
Span uncertainty		nom. 1 %

Spectral purity SSB phase noise		
Carrier offset	30 kHz	f = 500 MHz $< -95 \text{ dBc (1 Hz), typ. } -105 \text{ dBc (1 Hz)}$
	100 kHz	$< -100 \text{ dBc (1 Hz), typ. } -110 \text{ dBc (1 Hz)}$
	1 MHz	$< -120 \text{ dBc (1 Hz), typ. } -127 \text{ dBc (1 Hz)}$

¹ Temperature drift for serial number < 115000: +30 °C to +50 °C: 3×10^{-6} .

Sweep time

Sweep time	span = 0 Hz	100 μ s to 1000 s
	10 Hz \leq span \leq 600 MHz	20 ms to 1000 s
	span > 600 MHz	(20 ms \times span / 600 MHz) to 1000 s
Uncertainty	span = 0 Hz	nom. 1 %
	span \geq 10 Hz	nom. 3 %

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	1 Hz to 5 MHz in 1/3 sequence ²
	zero span ³	10 MHz, 20 MHz additionally
Bandwidth accuracy	1 Hz \leq RBW \leq 300 kHz	nom. < 5 %
	RBW > 300 kHz	nom. < 10 %
Selectivity 60 dB:3 dB	Gaussian type filters	nom. < 5
Video filters		
Range	-3 dB bandwidth	1 Hz to 3 MHz in 1/3 sequence
	zero span ³	10 MHz additionally

Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation \geq 10 dB		
DC voltage	R&S®FSH4/R&S®FSH 8, models .04/.08/.14/.18	80 V
	R&S®FSH4/R&S®FSH 8, models .24/.28, R&S®FSH13, R&S®FSH 20	50 V
CW RF power		30 dBm (= 1 W)
Peak RF power	duration < 3 s	33 dBm (= 2 W)
Maximum pulse voltage		150 V
Maximum pulse energy	pulse width 10 μ s	10 mWs
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power		20 dBm (= 100 mW)
Peak RF power	duration < 3 s	23 dBm (= 200 mW)
Maximum pulse voltage		50 V
Maximum pulse energy	pulse width 10 μ s	1 mWs
Intermodulation		
Third order intercept (TOI), nominal values	intermodulation-free dynamic range, signal level: -20 dBm (both), RF attenuation = 0 dB, RF preamplifier = off	
	$f_{in} < 300$ MHz	> 54 dBc (TOI > +7 dBm, typ. +11 dBm)
	300 MHz $\leq f_{in} < 3.6$ GHz	> 60 dBc (TOI > +10 dBm, typ. +15 dBm)
	3.6 GHz $\leq f_{in} \leq 20$ GHz	> 46 dBc (TOI > +3 dBm, typ. +10 dBm)
	intermodulation-free dynamic range, signal level: -40 dBm (both), RF attenuation = 0 dB, RF preamplifier = on	
	$f_{in} < 300$ MHz	> 50 dBc (TOI > -15 dBm)
300 MHz $\leq f_{in} \leq 20$ GHz	> 56 dBc (TOI > -12 dBm)	
Second harmonic intercept (SHI), nominal values	RF attenuation = 0 dB, RF preamplifier = off	
	$f_{in} = 20$ MHz to 1.5 GHz	+40 dBm
	$f_{in} = 1.5$ GHz to 3 GHz	+30 dBm
	$f_{in} = 3$ GHz to 4 GHz	+20 dBm
	$f_{in} = 4$ GHz to 10 GHz	+60 dBm
	RF attenuation 0 dB, RF preamplifier = on	
	$f_{in} = 100$ MHz to 4 GHz	0 dBm

² Only for R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20.

³ Requires instrument with serial number > 105000.

Displayed average noise level	0 dB RF attenuation, termination 50 Ω, RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator off, normalized to 1 Hz	
	preamplifier = off	
	R&S®FSH4, R&S®FSH8 (models .04/.14/.08/.18 only)	
	9 kHz to 100 kHz	< -108 dBm, typ. -118 dBm
	R&S®FSH13/R&S®FSH20	
	9 kHz to 100 kHz	< -96 dBm, typ. -106 dBm
	R&S®FSH4, R&S®FSH8, R&S®FSH13/R&S®FSH20	
	100 kHz to 1 MHz	< -115 dBm, typ. -125 dBm
	1 MHz to 10 MHz	< -136 dBm, typ. -144 dBm
	10 MHz to 2 GHz	< -141 dBm, typ. -146 dBm
	2 GHz to 3.6 GHz	< -138 dBm, typ. -143 dBm
	3.6 GHz to 5 GHz	< -142 dBm, typ. -146 dBm
	5 GHz to 6.5 GHz	< -140 dBm, typ. -144 dBm
	6.5 GHz to 13.6 GHz	< -136 dBm, typ. -141 dBm
	13.6 GHz to 18 GHz	< -134 dBm, typ. -139 dBm
	18 GHz to 20 GHz	< -130 dBm, typ. -135 dBm
	preamplifier = on	
	R&S®FSH4, R&S®FSH8, R&S®FSH13/R&S®FSH20	
	100 kHz to 1 MHz	< -133 dBm, typ. -143 dBm
	R&S®FSH4, R&S®FSH8	
	1 MHz to 10 MHz	< -157 dBm, typ. -161 dBm
	R&S®FSH13/R&S®FSH20	
	1 MHz to 10 MHz	< -155 dBm, typ. -159 dBm
	R&S®FSH4, R&S®FSH8, R&S®FSH13/R&S®FSH20	
	10 MHz to 1 GHz	< -161 dBm, typ. -165 dBm
	1 GHz to 2 GHz	< -159 dBm, typ. -163 dBm
	2 GHz to 5 GHz	< -155 dBm, typ. -159 dBm
	5 GHz to 6.5 GHz	< -151 dBm, typ. -155 dBm
	6.5 GHz to 8 GHz	< -147 dBm, typ. -150 dBm
	8 GHz to 13.6 GHz	< -158 dBm, typ. -162 dBm
13.6 GHz to 18 GHz	< -155 dBm, typ. -160 dBm	
18 GHz to 20 GHz	< -150 dBm, typ. -155 dBm	
Adjacent channel leakage power ratio (ACLR)		
Dynamic range	frequency < 3.6 GHz, total power > -20 dBm	
	3GPP WCDMA	
	adjacent channel	nom. > 55 dB
	alternate channel	nom. > 58 dB
	CDMA2000	
	adjacent channel	nom. > 58 dB
	alternate channel	nom. > 61 dB
Immunity to interference		
Image frequencies, nominal values	R&S®FSH4/R&S®FSH8 with serial number < 105000	
	$f_{in} - 2 \times 21.4$ MHz	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 831.4$ MHz	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4881$ MHz	-60 dBc
	R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20	
	$f_{in} - 2 \times 54.4$ MHz	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 860.8$ MHz	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4892.8$ MHz	-60 dBc
	R&S®FSH13/R&S®FSH20	
	$f_{in} + 2 \times 6342.4$ MHz	-60 dBc
$f_{in} - 2 \times 6342.4$ MHz	-60 dBc	
Intermediate frequencies, nominal values	R&S®FSH4/R&S®FSH8 with serial number < 105000	
	21.4 MHz, 831.4 MHz, 4881.4 MHz	< -60 dBc, typ. -80 dBc
	8931.4 MHz	-50 dBc
	R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20	
	54.4 MHz, 860.8 MHz, 4892.8 MHz	< -60 dBc, typ. -80 dBc
	8924.8 MHz	-50 dBc
	R&S®FSH13/R&S®FSH20	
	3171.2 MHz	-50 dBc

Other interfering signals, signal level – RF attenuation < –20 dBm, nominal values	R&S®FSH4/R&S®FSH8 with serial number < 105000	
	$f \leq 3.6$ GHz, spurious at $f_{in} - 2440.7$ MHz	< –60 dBc
	3.6 GHz < $f \leq 8$ GHz, spurious at $f_{in} - 4465.7$ MHz	< –60 dBc
	R&S®FSH4/R&S®FSH8 with serial number ≥ 105000 , R&S®FSH1/R&S®FSH20	
	$f \leq 3.6$ GHz, spurious at $f_{in} - 2446.4$ MHz	< –60 dBc
	3.6 GHz < $f \leq 8$ GHz, spurious at $f_{in} - 4462.4$ MHz	< –60 dBc
Other interfering signals, related to local oscillators, nominal values	8 GHz < $f \leq 20$ GHz,	< –60 dBc
	$f \leq 3.6$ GHz	
	$\Delta f < 300$ kHz	typ. –60 dBc
	$\Delta f \geq 300$ kHz	< –60 dBc
	$f > 3.6$ GHz	
	$\Delta f < 300$ kHz	typ. –54 dBc
Residual spurious response, nominal values	$\Delta f \geq 300$ kHz	< –54 dBc
	$f =$ receive frequency	
	input matched with 50Ω , without input signal, RBW ≤ 30 kHz, $f \geq 3$ MHz, RF attenuation = 0 dB, tracking generator off	< –90 dBm
	Level display	
	Logarithmic level axis	1/2/5/10/20/50/100/150 dB, 10 divisions
	Linear level axis	0 % to 100 %, 10 divisions
Number of traces	2	
Trace detectors	max. peak, min. peak, auto peak, sample, RMS	
Trace functions	clear/write, max. hold, min. hold, average, view	
Setting range of reference level	–200 dBm to +30 dBm	
Units of level axis	dBm, dBmV, dB μ V, V, W	
Level measurement uncertainty		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	9 kHz $\leq f < 100$ kHz (models .04/.14/.08/.18 only)	nom. < 1.5 dB
	100 kHz $\leq f < 10$ MHz	nom. < 1.5 dB
	10 MHz $\leq f \leq 3.6$ GHz	< 1 dB
	3.6 GHz < $f \leq 20$ GHz	< 1.5 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		nom. < 0.1 dB
Display nonlinearity	SNR > 16 dB, 0 dB to –50 dB, logarithmic level display	< 0.2 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	nom. < 0.1 dB
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, SNR > 16 dB, 0 dB to –50 dB below reference level, RF attenuation: auto	
	10 MHz $\leq f \leq 3.6$ GHz	0.72 dB
	3.6 GHz < $f \leq 20$ GHz	1.03 dB

Trigger functions

Trigger		
Trigger source		free run, video, external
Internal periodic trigger, cycle frequency	serial number > 121000	internal periodic trigger additionally
	serial number > 121000	1 Hz to 1 MHz, min. resolution 1 Hz
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
Gated trigger		
Gate source		external
Gate delay		10 μ s to 100 s, min. resolution 10 μ s (or 1 % of delay)
Gate length		10 μ s to 100 s, min. resolution 10 μ s (or 1 % of gate length)

Inputs and outputs

RF input		
Impedance		50 Ω
Connector		N female
VSWR	100 kHz \leq f \leq 1 GHz	nom. < 1.5
	1 GHz < f \leq 6 GHz	nom. < 2
	6 GHz < f \leq 20 GHz	nom. < 3
Input attenuator	RF input only	0 dB to 40 dB in 5 dB steps
AF output		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		nom. 32 Ω
Voltage (open circuit)		adjustable from 0 V to > 100 mV (RMS)
Power sensor		
Connector		7-contact female (type Binder 712)
Power sensors supported		see accessories
Tracking generator (only models .14/.18/.23/.24/.28/.30)		
Frequency range	models .14/.24	100 kHz to 3.6 GHz
	models .18/.23/.28/.30	100 kHz to 8 GHz
Connector		N female, 50 Ω
VSWR	100 kHz \leq f \leq 1 GHz	nom. < 1.5
	1 GHz < f \leq 6 GHz	nom. < 2
	6 GHz < f \leq 8 GHz, models .18 and .28	nom. < 3
Output level	tracking generator attenuation = 0 dB	nom. 0 dBm
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range for isolation measurements	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz \leq f < 300 kHz	> 60 dB, typ. 80 dB
	300 kHz \leq f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz \leq f < 8 GHz, models .18 and .28	typ. > 50 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Maximum pulse voltage		50 V
Maximum pulse energy (10 μ s)		1 mWs
External reference, external trigger, DC bias port 2 (BNC 1)		
Connector		BNC, 50 Ω
Mode	selectable, R&S®F5H4/R&S®F5H8, models .24/.28	external reference, external trigger, DC bias port 2
	selectable, R&S®F5H4/R&S®F5H8, other models; R&S®F5H13/R&S®F5H20	external reference, external trigger
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low \rightarrow high transition	2.4 V
	high \rightarrow low transition	0.7 V
DC bias port 2	maximum rated input voltage	50 V
	maximum rated input current	600 mA


IF out, DC bias port 1 (BNC 2)		
Connector		BNC, 50 Ω
Mode	selectable, R&S®FSH4/R&S®FSH8, models .24/.28	IF out, DC bias port 1
	R&S®FSH4/R&S®FSH8, models .04/.14/.08/.18, R&S®FSH13/R&S®FSH20	IF out
IF out frequency	R&S®FSH4/R&S®FSH8, serial number < 105000	21.4 MHz
	R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20	54.4 MHz
DC bias port 1	maximum rated input voltage	50 V
	maximum rated input current	600 mA
Internal DC bias ⁴		
Output port	selectable	port 1 or 2
Output voltage		+12 V to +32 V in 1 V steps
Maximum output power	operated with battery	4 W
	operated with AC mains	10 W
Maximum continuous output current	mode: internal	500 mA

⁴ Internal DC bias is available by instruments with serial number \geq 106292 (model .24) or serial number \geq 106623 (model .28).

Vector network analysis/vector voltmeter


R&S®FSH4/R&S®FSH8, models .24/.28 with R&S®FSH-K42/R&S®FSH-K45 options

Frequency range	R&S®FSH4, model .24 R&S®FSH8, model .28	300 kHz to 3.6 GHz 300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nom. 0 dBm to -40 dBm in 1 dB steps
Reflection measurement		
Result formats	measurement mode: vector	magnitude, phase, magnitude + phase, VSWR, reflection coefficient, Smith chart, cable loss, group delay, electrical length
	measurement mode: vector voltmeter S-parameters	magnitude + phase, VSWR + reflection S_{22} , S_{11}
Return loss		
Range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty		see figure below
One-port phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, RBW = 100 Hz, RF attenuation = 10 dB, nominal source power = 0 dBm, +20 °C to +30 °C	
	300 kHz ≤ f ≤ 3.6 GHz	
	0 dB ≤ return loss < 15 dB	nom. < 3°
	15 dB ≤ return loss < 25 dB	nom. < 6°
	25 dB ≤ return loss < 35 dB	nom. < 20°
	3.6 GHz < f ≤ 8 GHz (R&S®FSH8 only)	
0 dB ≤ return loss < 15 dB	nom. < 3°	
15 dB ≤ return loss < 25 dB	nom. < 6°	
25 dB ≤ return loss < 35 dB	nom. < 20°	
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
Smith chart		
Range		1, zoom: × 2, × 4, × 8
Reflection coefficient		
mRho	range	1 to 1000 in 1/2/5 steps
Corrected directivity	300 kHz ≤ f ≤ 3 GHz	typ. 46 dB
	3 GHz < f ≤ 6 GHz	typ. 43 dB
	6 GHz < f ≤ 8 GHz	typ. 36 dB
Corrected test port match	300 kHz ≤ f ≤ 3 GHz	typ. 30 dB
	3 GHz < f ≤ 6 GHz	typ. 25 dB
	6 GHz < f ≤ 8 GHz	typ. 21 dB

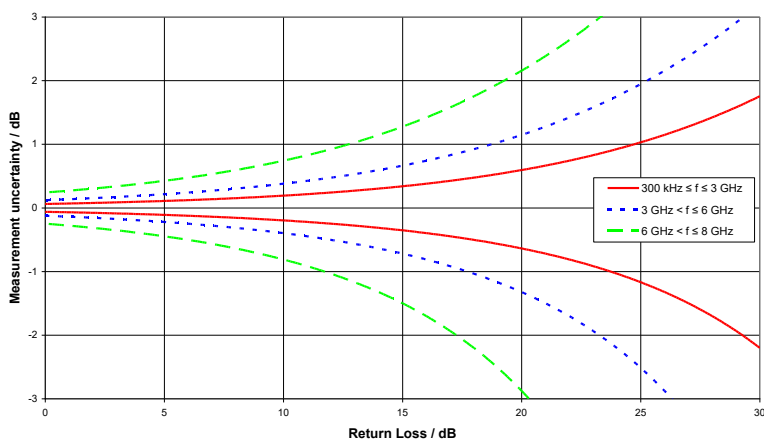

Uncertainty of reflection measurement, R&S®FSH4/R&S®FSH8 with the R&S®FSH-K42/R&S®FSH-K45 option


Transmission measurement		
Result formats	measurement mode: vector	magnitude, phase, magnitude + phase, group delay, electrical length
	measurement mode = vector voltmeter (requires R&S®FSH-K45)	magnitude + phase
	S-parameters	S ₁₂ , S ₂₁
Gain		
Measurement range		-120 dB to +80 dB
Display range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty	calibration method: full two port high accuracy	see figure below
Phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, RBW = 100 Hz, RF attenuation = 10 dB, nominal source power = 0 dBm, +20 °C to +30 °C	
	300 kHz ≤ f ≤ 50 MHz	
	0 dB ≤ insertion loss < 40 dB	nom. < 2°
	50 MHz < f ≤ 3.6 GHz	
	0 dB ≤ insertion loss < 50 dB	nom. < 2°
	50 dB ≤ insertion loss < 70 dB	nom. < 3°
	3.6 GHz < f < 6 GHz (R&S®FSH8 only)	
	0 dB ≤ insertion loss < 50 dB	nom. < 2°
	50 dB ≤ insertion loss < 70 dB	nom. < 3°
	6 GHz ≤ f < 8 GHz (R&S®FSH8 only)	
0 dB ≤ insertion loss < 50 dB	nom. < 3°	
50 dB ≤ insertion loss < 70 dB	nom. < 5°	
Dynamic range from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 70 dB
	300 kHz ≤ f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. > 50 dB
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 80 dB
	300 kHz ≤ f < 6 GHz	> 80 dB, typ. 100 dB
	6 GHz ≤ f < 8 GHz	typ. > 60 dB
Test port match		as specified for tracking generator output/RF input

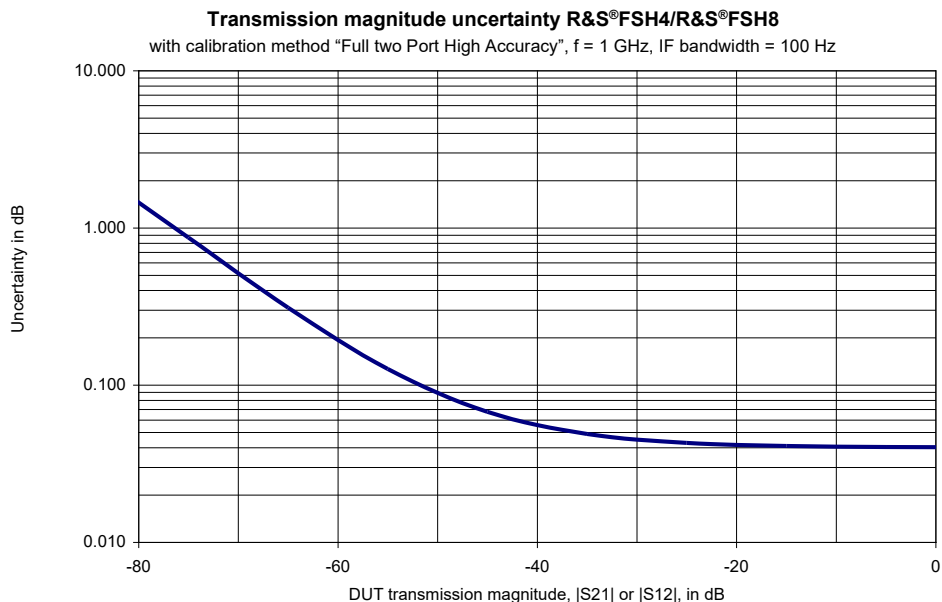

Transmission magnitude uncertainty, R&S®FSH4/R&S®FSH8 with the R&S®FSH-K42/R&S®FSH-K45 option

R&S®FSH13/R&S®FSH20, models .23/.30 with or without option R&S®FSH-K45 option ⁵

Frequency range		100 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nom. 0 dBm to -40 dBm, in 1 dB steps
Reflection measurement		
Result formats	measurement mode: vector	magnitude, phase, magnitude + phase, VSWR, reflection coefficient, Smith chart, cable loss, group delay, electrical length
	measurement mode: vector voltmeter (requires R&S®FSH-K45)	magnitude + phase, VSWR + reflection
	S-parameter	S ₂₂
Return loss		
Input		RF port 2
Range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty		see figure below
One-port phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, RBW = 100 Hz, RF attenuation = 10 dB, nominal source power = 0 dBm, +20 °C to +30 °C	
	300 kHz ≤ f ≤ 3.6 GHz	
	0 dB ≤ return loss < 15 dB	nom. < 3°
	15 dB ≤ return loss < 25 dB	nom. < 6°
	25 dB ≤ return loss < 35 dB	nom. < 20°
	3.6 GHz < f ≤ 8 GHz (R&S®FSH8 only)	
	0 dB ≤ return loss < 15 dB	nom. < 3°
15 dB ≤ return loss < 25 dB	nom. < 6°	
25 dB ≤ return loss < 35 dB	nom. < 20°	
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
Smith chart		
Range		1, zoom: × 2, × 4, × 8
Reflection coefficient		
mRho	range	1 to 1000 in 1/2/5 steps
Corrected directivity	300 kHz ≤ f ≤ 3 GHz	typ. 46 dB
	3 GHz < f ≤ 6 GHz	typ. 43 dB
	6 GHz < f ≤ 8 GHz	typ. 36 dB
Corrected test port match	300 kHz ≤ f ≤ 3 GHz	typ. 30 dB
	3 GHz < f ≤ 6 GHz	typ. 25 dB
	6 GHz < f ≤ 8 GHz	typ. 21 dB

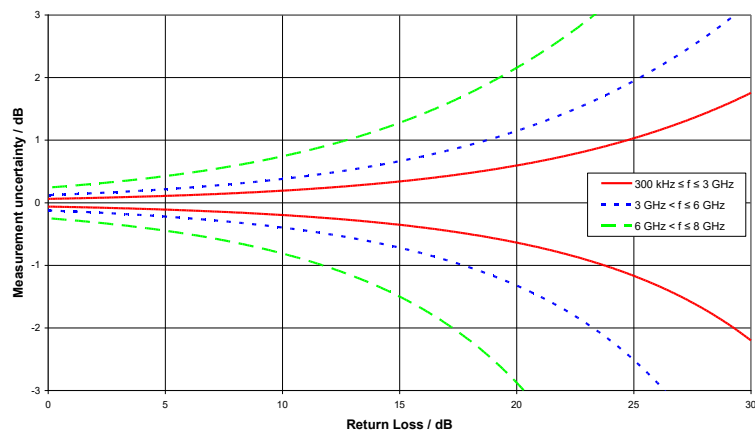

Uncertainty of reflection measurement with the R&S®FSH13, model .23/R&S®FSH20, model .30.


⁵ R&S®FSH13, model .23 and R&S®FSH20, model .30, support one port reflection and transmission measurements as standard. For vector voltmeter support the R&S®FSH-K45 option is required.

Transmission measurement		
Result formats	measurement mode: vector	magnitude, phase, magnitude + phase, group delay, electrical length
	measurement mode: vector voltmeter (requires R&S®FSH-K45)	magnitude + phase
	S-parameter	S ₁₂
Gain		
Measurement range		-120 dB to +80 dB
Display range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 80 dB
	300 kHz ≤ f < 6 GHz	> 80 dB, typ. 100 dB
	6 GHz ≤ f < 8 GHz	typ. > 60 dB
Test port match		as specified for tracking generator output/RF input

Scalar network analysis

R&S®FSH4/R&S®FSH8, models .24/.28 without R&S®FSH-K42 option ⁶

Frequency range	R&S®FSH4, model .24 R&S®FSH8, model .28	300 kHz to 3.6 GHz 300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nom. 0 dBm to -40 dBm, in 1 dB steps
Reflection measurement		
Result formats		magnitude, VSWR, reflection coefficient
Return loss	range	1/2/5/10/20/50/100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 2, 6, 11, 21 or 71, selectable
Corrected directivity (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nom. > 25 dB
	6 GHz < f ≤ 8 GHz	nom. > 20 dB
Corrected test port match (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nom. > 20 dB
	6 GHz < f ≤ 8 GHz	nom. > 15 dB
Transmission measurement		
Result formats		magnitude
Dynamic range, from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	> 60 dB, typ. 80 dB
	6 GHz ≤ f < 8 GHz	typ. > 40 dB
Dynamic range, from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. > 50 dB
Test port match		as specified for tracking generator output/RF input

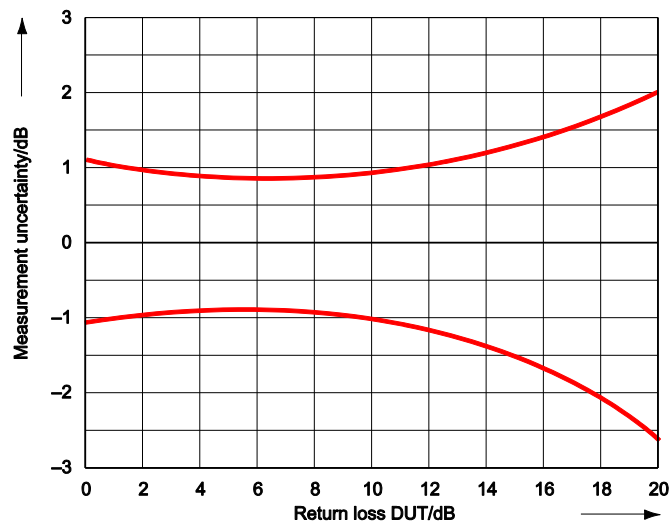

Uncertainty of reflection measurement without the R&S®FSH-K42 option

⁶ R&S®FSH13, model .23/R&S®FSH20, model .30 support vector network analysis only.

Distance-to-fault analysis

R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, models .24/.28/.23/.30 with R&S®FSH-K41 option

Return loss	range	1/2/5/10/20/50/100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
	resolution	0.01
Reflection coefficient		
mRho	range	1 to 1000 in 1/2/5 steps
Fault resolution in m		$(1.5 \times 10^8 \times \text{velocity factor} / \text{span})$
Maximum permissible spurious signal	RF attenuation = 0 dB	nom. 0 dBm
Input	models .24/.28: selectable	RF port 1 or 2
	models .23/.30	RF port 2
Maximum cable length	depending on cable loss	1500 m
Cable type		coaxial, waveguide

R&S®FSH-K29 pulse measurements with power sensor

In combination with one of the R&S®NRP-Z81, R&S®NRP-Z85, R&S®NRP-Z86, R&S®NRP18P, R&S®NRP40P or R&S®NRP50P power sensors, the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20 support measurements on pulsed signals ⁷. The achievable RF performance is documented in the data sheet specifications of the R&S®NRP-Z81, R&S®NRP-Z85, R&S®NRP-Z86, R&S®NRP18P, R&S®NRP40P and R&S®NRP50P power sensors. The list below shows which measurements are supported by the R&S®FSH-K29.

Measurements	R&S®FSH-K29
Pulse power parameters	•
Peak power	•
Pulse top power	•
Average power	•
Base power	•
Minimum power	•
Positive overshoot	•
Negative overshoot	•
Pulse timing parameters	•
Pulse duration	•
Pulse period	•
Pulse start/stop time	•
Rise/fall time	•
Duty cycle	•

⁷ The R&S®NRP-Z8x power sensors are supported by instruments with serial number ≥ 105000 .
For instruments with serial number < 121000 , the R&S®FSH-Z129 adapter cable is required in addition.

R&S®FSH-K10 GSM EDGE measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K10
Spectrum overview	•
RF channel power	•
Occupied bandwidth	•
Power within span	•
Result summary	•
RF channel power	•
Burst power	•
Carrier frequency error	•
Burst type identification	•
BCC (TSC) identification	•
GMSK phase error	•
GMSK magnitude error	•
8PSK EVM	•
Traffic activity	•
Burst power	•
RF channel power	•
Burst power	•
BCC (TSC) identification	•
Burst display (8 bursts)	•
Burst type identification	•

All specifications are given for GMSK and 8PSK modulations, SNR > 30 dB.

Frequency range	15 MHz to 3.0 GHz	
Carrier frequency uncertainty, nominal values		
Lock range	±8 kHz	
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 15 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz	
	preamplifier = off	-60 dBm < P_{total} < 20 dBm
	preamplifier = on	-75 dBm < P_{total} < 20 dBm
Measurement uncertainty	-75 dBm < P_{total} < 20 dBm, $P_{REF_LEV} - 30\text{ dB} < P_{total} < P_{REF_LEV} + 3\text{ dB}$	1 dB, typ. 0.5 dB
Burst power		
Measurement range	-40 dBm < P_{total} < 20 dBm	$P_{total} - 20\text{ dB} < P_{burst} < P_{total}$
Measurement uncertainty	$P_{total} - 20\text{ dB} < P_{burst} < P_{total}$	1 dB, typ. 0.5 dB
GMSK modulation quality		
	SNR > 30 dB, nominal	
Residual phase error		typ. 0.3°
Residual magnitude error		typ. 0.4 %
8PSK modulation quality		
	SNR > 30 dB, nominal	
Residual EVM		typ. 0.5 %

R&S®FSH-K44 3GPP WCDMA BTS/NodeB pilot channel and pilot EVM measurement application;

R&S®FSH-K44E 3GPP WCDMA BTS/NodeB code domain power and EVM measurement application with HSDPA/HSPA+ analyzer

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K44	R&S®FSH-K44E
Spectrum overview	•	•
Scrambling code search	•	•
Isotropic antenna	•	•
Limits screen	•	•
Result summary	•	•
RF channel power	•	•
Carrier frequency error	•	•
Active channels	• (2 channels)	•
Scrambling code found	•	•
Composite EVM	–	•
Peak code domain error	–	•
Average RCDE	–	•
I/Q offset	–	•
Gain imbalance	–	•
P-CPICH power	•	•
P-CPICH E_c/I_0	•	•
P-CPICH symbol EVM	•	•
Sync channel power	•	•
Code domain power	–	•
Code channel power	–	•
Code channel symbol rate	–	•
Channel power	–	•
EVM	–	•
Code domain channel table	–	•
Code channel type	–	•
Channel number/spreading factor	–	•
Code channel symbol rate	–	•
Timing offset	–	•
Pilot bits	–	•
Status	–	•
Power, absolute	–	•
Power, relative to CPICH	–	•
HSDPA channel support	–	•
HSPA+ channel support	–	•

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty	test case 6.3, in line with 3GPP TS 25.141	
Lock range		±1 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power	test case 6.2.1, in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	frequency > 15 MHz	
	preamplifier = off	-60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = on	-80 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	-80 dBm < $P_{RF\ channel}$ < 20 dBm, $P_{REF_LEV} - 30\ dB < P_{RF\ channel} < P_{REF_LEV} + 3\ dB$	< 1 dB, typ. 0.5 dB
CPICH power	test case 6.2.2, in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{CPICH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{CPICH} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
P-CCPCH power	test model 2, in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{P-CCPCH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{P-CCPCH} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
PSCH/SSCH power	test model 2, in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SCH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SCH} < P_{RF\ channel}$	< 2.5 dB, typ. 1.5 dB
Symbol EVM	SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm single channel EVM	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10 %	0.5 %
	10 % < EVM < 25 %	2.5 %
Residual EVM		typ. 1.5 %
Composite EVM ⁸	test case 6.7.1, in line with 3GPP TS 25.141, test model 4, with P-CPICH, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10 %	typ. 2.0 %
	10 % < EVM < 25 %	typ. 2.5 %
Residual EVM		typ. 2.5 %
Scrambling code detection	test model 1.16, in line with 3GPP TS 25.141	
Lock range		±1 kHz
Calculation time		2.5 s
CPICH E_c/I_0		> -21 dB

⁸ Requires instrument with serial number ≥ 105000.

R&S®FSH-K46 CDMA2000 BTS pilot channel and EVM measurement application;

R&S®FSH-K46E CDMA2000 BTS code domain power measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K46	R&S®FSH-K46E
Spectrum overview	•	•
Result summary	•	•
RF channel power	•	•
Rho	•	•
Carrier frequency error	•	•
Active channels	•	•
Composite EVM	•	•
Peak to average	•	•
Pilot channel power (Cd 0)	•	•
Sync channel power (Cd 32)	•	•
Code domain power	–	•
RF channel power	–	•
Pilot power	–	•
Sync power (rel. to RF ch. pwr./pilot)	–	•
Code power (rel. to RF ch. pwr./pilot)	–	•
Carrier frequency error	–	•
Rho	–	•
Composite EVM	–	•
PN offset found	–	•
Code domain channel table	–	•
Channel type	–	•
Walsh code/spreading factor	–	•
Symbol rate (ksps)	–	•
RC	–	•
Status	–	•
Power absolute (dBm)	–	•
Power relative (rel. to RF ch. pwr./pilot)	–	•
PN scanner	–	•
Detected PN offset	–	•
Power per detected PN offset	–	•

All specifications are valid for RC3, one traffic channel, SNR > 30 dB.

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty, nominal values		
Lock range		±10 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz	
	preamplifier = off	–60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = on	–75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	–75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level adjusted to RF channel power	< 1 dB, typ. 0.5 dB
PICH power		
Measurement range	–40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{PICH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{CPICH} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
F-SYNC power		
Measurement range	–40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SYNC} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SYNC} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB

Composite EVM	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$1.5 \% < \text{EVM} < 25 \%$
Measurement uncertainty	$1.5 \% < \text{EVM} \leq 10\%$	typ. 2.0 %
	$10 \% < \text{EVM} < 25 \%$	typ. 2.5 %
Residual EVM		typ. 2.5 %
Rho	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$0.9 < \rho < 1$
Measurement uncertainty	$0.97 < \rho \leq 1.0$	typ. 0.005
	$0.90 < \rho \leq 0.97$	typ. 0.02

R&S®FSH-K47 1xEV-DO® BTS pilot channel and EVM measurement application;

R&S®FSH-K47E 1xEV-DO® BTS PN scanner and time domain power measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K47	R&S®FSH-K47E
Spectrum overview	•	•
Result summary	•	•
RF channel power	•	•
Pilot Rho	•	•
Carrier frequency error	•	•
Traffic activity	•	•
Pilot EVM	•	•
PN timing (tau)	•	•
Peak to average	•	•
Pilot power	•	•
MAC power	•	•
Data power	•	•
PN scanner	–	•
Detected PN offset	–	•
Power per detected PN offset	–	•
Burst power	–	•
RF channel power	–	•
Pilot power	–	•

All specifications are valid for RC3, one traffic channel, SNR > 30 dB.

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty, nominal values		
Lock range		±5 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 100 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz preamplifier = off preamplifier = on	–60 dBm < $P_{RF\ channel}$ < 20 dBm –75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	–75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level, adjusted to RF channel power	< 1 dB, typ. 0.5 dB
Pilot power		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{PICH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{CPICH} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
MAC power		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SYNC} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SYNC} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
Data power		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SYNC} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SYNC} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
Pilot EVM		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10 % 10 % < EVM < 25 %	typ. 2.0 % typ. 2.5 %
Residual EVM		typ. 2.5 %
Pilot Rho		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	0.9 < rho < 1
Measurement uncertainty	0.97 < rho ≤ 1.0 0.90 < rho ≤ 0.97	typ. 0.005 typ. 0.02

R&S®FSH-K48 3GPP TD-SCDMA BTS power and P-CCPCH EVM measurement application;

R&S®FSH-K48E 3GPP TD-SCDMA/HSDPA BTS code domain power and EVM measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K48	R&S®FSH-K48E
Spectrum overview	●	●
Time domain power	–	●
Slot 0 to 6 power	–	●
DwPTS power	–	●
UpPTS power	–	●
Slot 0 to 6 composite EVM	–	●
Slot 0 to 6 C/I	–	●
Sync ID	–	●
Sync ID #	–	●
Sync ID power	–	●
Sync ID delay	–	●
Code domain power	–	●
Code #/SF (spreading factor)	–	●
Modulation type (QPSK, 8PSK, 16QAM, 64QAM)	–	●
Symbol EVM	–	●
Code power	–	●
RF channel power	–	●
Composite EVM	–	●
Code domain channel table	–	●
Code #/SF (spreading factor)	–	●
Modulation type (QPSK, 8PSK, 16QAM, 64QAM)	–	●
Symbol EVM	–	●
Code power abs/rel	–	●
Limits screen	–	●
Result summary	●	●
RF channel power	●	●
Carrier frequency error	●	●
Composite EVM	–	●
Peak code domain error	–	●
Average RCDE	–	●
I-Q offset	–	●
Gain imbalance	–	●
Active channels	–	●
Scrambling code found	●	●
P-CCPCH symbol EVM	●	●
P-CCPCH Ec/Io	●	●
Data power abs/rel	●	●
Data 1/2 power abs/rel	●	●
Midamble power abs/rel	●	●

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty	test case 6.3, in line with 3GPP TS 25.142	
Lock range		±5 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power	test case 6.2 in line with 3GPP TS 25.142, SNR > 30 dB	
Measurement range	frequency > 15 MHz	
	preamplifier = off	-60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = on	-75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	-75 dBm < $P_{RF\ channel}$ < 20 dBm, $P_{REF_LEV} - 30\ dB < P_{RF\ channel} < P_{REF_LEV} + 3\ dB$	< 1 dB, typ. 0.5 dB
P-CCPCH symbol EVM	SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm single channel EVM	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10 %	typ. 0.5 %
	10 % < EVM < 25 %	typ. 2.5 %
Residual EVM		typ. 0.8 %
Data power, data 1/2 power, midamble power	SNR > 30 dB	
Measurement range		-60 dBm < $P_{data, midamble}$ < 20 dBm
Measurement uncertainty	-40 dBm < $P_{data, midamble}$ < 20 dBm	< 1 dB, typ. 0.5 dB
Composite EVM	test case 6.8.1, in line with 3GPP TS 25.142, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10 %	typ. 1.0 %
	10 % < EVM < 25 %	typ. 2.5 %
Residual EVM		typ. 1.0 %
Code domain power	SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{code} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{code} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
Sync ID detection		
Lock range		±5 kHz

R&S®FSH-K50/R&S®FSH-K51 LTE FDD/TDD downlink pilot channel and EVM measurement application ⁹;

R&S®FSH-K50E/R&S®FSH-K51E LTE FDD/TDD downlink extended channel and modulation measurement application ⁹

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K50/R&S®FSH-K51	R&S®FSH-K50E/R&S®FSH-K51E
Spectrum overview	•	•
Result summary	•	•
RF channel power	•	•
Carrier frequency error	•	•
I/Q offset	•	•
Cell identity	•	•
Cyclic prefix	•	•
Reference signal power	•	•
PSYNC power	•	•
SSYNC power	•	•
PBCH power	•	•
PCFICH power	•	•
PDSCH power	•	•
Reference signal EVM	•	•
PSYNC EVM	•	•
SSYNC EVM	•	•
PBCH EVM	•	•
PCFICH EVM	•	•
PDSCH EVM	•	•
Isotropic antenna	•	•
Limits screen	•	•
Constellation diagram	–	•
PSYNC	–	•
SSYNC	–	•
QPSK	–	•
16QAM	–	•
64QAM	–	•
256QAM	–	•
BTS scanner	–	•
Cell identity	–	•
PSYNC power	–	•
SSYNC power	–	•
Resource allocations	–	•

All specifications are valid for SNR > 30 dB.

Frequency range		15 MHz to 4.0 GHz
Supported channel bandwidths		1.4/3/5/10/15/20 MHz
Carrier frequency uncertainty		
Lock range		±10 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz	
	preamplifier = off	–60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = on	–75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	–75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level adjusted to RF channel power	< 1 dB, typ. 0.5 dB
EVM		
Measurement range	–50 dBm < $P_{RF\ channel}$ < 10 dBm, 860 MHz < frequency < 4.0 GHz, E-UTRA test model 3.1, bandwidth 10 MHz, reference signal and PDSCH	
Residual EVM	< 2.5 %, typ. 2.0 %	

⁹ R&S®FSH-K50/-K51/-K50E/-K51E/-K56 options require instruments with serial number ≥ 105000.

R&S®FSH-K56 NB-IoT measurement application (for FDD LTE) ⁹

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K56
Spectrum overview	•
Result summary	•
NB-IoT channel power	•
NB-IoT carrier frequency error	•
NB-IoT cell identity	•
NB-IoT reference signal power	•
NPSYNC power	•
NSSYNC power	•
NPBCH power	•
Reference signal EVM	•
NPSYNC EVM	•
NSSYNC EVM	•
NPBCH EVM	•
Constellation diagram	•
NPSYNC	•
NSSYNC	•
QPSK	•

All specifications are valid for SNR > 30 dB.

Frequency range		15 MHz to 4.0 GHz
Supported channel bandwidths		3/5/10/15/20 MHz
Carrier frequency uncertainty		
Lock range		±10 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz	
	preamplifier = off	-60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = on	-75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	-75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level adjusted to RF channel power	< 1 dB, typ. 0.5 dB
EVM		
Measurement range	-50 dBm < $P_{RF\ channel}$ < 10 dBm, 860 MHz < frequency < 4.0 GHz,	
Residual EVM ¹⁰	E-UTRA test model 3.1, bandwidth 10 MHz, reference signal and PDSCH, embedded NB-IoT signal, NCellID = 1, CRS = 19, punctuate LTE at NB-IoT carriers	< 2.5 %, typ. 2.0 %
Deployment		in-band, guard band, standalone
NB-IoT sequence info		CRS sequence info, PRB index
NB-IoT filter	dedicated for standalone mode with adjacent channels	on/off

¹⁰ For deployment in-band: NB-IoT cell identity must be identical to LTE cell identity.

R&S®FSH-K105 EMF measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration.

EMF measurements	R&S®FSH-K105
Sequence of measurements	•
Fixed frequency	•
Set of frequencies	•
Digital networks	
3GPP WCDMA BTS	• ¹¹
LTE FDD BTS	• ¹¹
LTE TDD BTS	• ¹¹
Spectrum measurements	
LTE channel power (10 MHz)	•
Spectrum overview (10 MHz)	•
Results	
Extrapolation factor (LTE, WCDMA)	•
Table of field strengths	•
Total field strength	•
Calculation of exposition	•
EMF limit check	•
ISO antenna measurement	•

Frequency range, measurement range		see definitions in the basic instrument and the digital network options
EMF measurement modes		
LTE	BTS scanner	SSYNC, RSRP, RSPWR ¹²
3GPP WCDMA	scrambling code	P-CPICH
Spectrum		LTE channel power (10 MHz)

The setup of the EMF measurement sequence and the detailed result evaluation is carried out with the PC application R&S®InstrumentView.

Required options for digital network measurements

Designation	Required option	Remarks
3GPP WCDMA BTS	R&S®FSH-K44	
LTE FDD BTS	R&S®FSH-K50 and R&S®FSH-K50E	only for R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20
LTE TDD BTS	R&S®FSH-K51 and R&S®FSH-K51E	only for R&S®FSH4/R&S®FSH8 with serial number \geq 105000, R&S®FSH13/R&S®FSH20

¹¹ See required options.

¹² RSPWR is the sum of the detected power of the BTS antenna 1 and/or 2 (dependent on the instrument configuration).

R&S®FSH-K43 receiver mode and channel scan measurement application

The specifications below apply to the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20. They are based on the data sheet specifications of the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, have not been checked separately and are not verified during instrument calibration.

Measurements	R&S®FSH-K43
Fixed frequency	•
Frequency scan	•
Channel scan	•
User defined channel list	•
EMI precompliance	•
CISPR bandwidths	•
CISPR detectors	•

Frequency range		see basic instrument
Measurement modes		fixed frequency, frequency scan, channel scan
Frequency scan stepsize		
Scan stepsize		100 Hz to max. frequency
Maximum number of steps		10000
Channel scan		
Channel spacing		user definable
Maximum number of channels		10000
Resolution bandwidths		
Range	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence
	CISPR bandwidths (-6 dB)	200 Hz, 9 kHz, 120 kHz, 1 MHz
Detectors		max. peak, average, RMS, quasi-peak
Level		see basic instrument

General data

Manual operation		
Languages		Chinese, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
Remote control (R&S®FSH-K40 option)		
Command set		SCPI 1997.0
LAN interface		10BASE-T/100BASE-T, RJ-45
USB		mini B plug, version 1.1
Display		
Resolution		640 × 480 pixel
Audio		
Speaker		internal
USB interface	R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20	type A plug, version 1.1
Memory		
Mass memory		flash memory (internal), SD card (not supplied), size ≤ 32 Gbyte
	R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20	memory stick (not supplied), USB version 1.1 or 2.0
Data storage	internal	> 256 instrument settings and traces
	on SD card/memory stick, ≥ 1 Gbyte	> 5000 instrument settings and traces
Temperature	operating temperature range	-10 °C to +55 °C
	storage temperature range	-20 °C to +50 °C
	battery charging mode	+10 °C to +45 °C
Climatic loading	relative humidity	+25 °C/+40 °C at 85 % relative humidity, in line with EN 60068-2-30
	protection class	IP51
	with R&S®HA-Z222 carrying holster and rain cap	IP54
Mechanical resistance		
Vibration	sinusoidal	in line with EN 60068-2-6, MIL-PRF-28800F class 2
	random	in line with EN 60068-2-64, MIL-PRF-28800F class 2
Shock		40 g shock spectrum, in line with MIL-STD-810F, method 516.4, procedure 1, EN 60068-2-27, MIL-PRF-28800F class 2

Power supply		
R&S®HA-Z201 plug-in AC power supply	input specifications	100 V to 240 V AC, 50 Hz to 60 Hz, 700 mA
	output specifications	15 V DC, 2 A
	operating temperature range	0 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
	test marks	VDE or SIQ, CE, UL, PSE
External DC voltage		14 V to 16 V
Internal battery		Lithium-ion battery
Capacity	R&S®HA-Z204 (standard)	4.2 Ah
	R&S®HA-Z206 (option)	6.3 Ah
Voltage		nom. 7.2 V
Operating time with new, fully charged battery	R&S®HA-Z204 (standard)	3 h
	R&S®HA-Z206 (option)	4.5 h
Charging time	instrument switched off or R&S®HA-Z203 battery charger	
	R&S®HA-Z204 (standard)	2.5 h
	R&S®HA-Z206 (option)	3.5 h
	instrument switched on	
	R&S®HA-Z204 (standard)	3.5 h
	R&S®HA-Z206 (option)	4.5 h
Life time	charging cycles	> 500
Power consumption		typ. 12 W
Safety		IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010.1-04
Test mark		VDE or SIQ, GS, CSA, CSA-NRTL
EU legislation	for details, see user documentation	EU: in-line with Data Act – Regulation (EU) 2023/2854
EMC	in line with EMC directive 2014/30/EU	EN 61326 class B (emission)
		CISPR 11/EN 55011/group 1 class B (emission)
		EN 61326 table 2 (immunity, industrial), field strength: 30 V/m: 30 MHz to 2 GHz, 3 V/m: 2 GHz to 2.7 GHz
Dimensions (W × H × D)	with handle	194 mm × 300 mm × 144 mm (7.6 in × 11.8 in × 5.7 in)
	without handle	194 mm × 300 mm × 69 mm (7.6 in × 11.8 in × 2.7 in)
Weight		< 3 kg (< 6.6 lb)
Recommended calibration interval		1 year

Equivalence of specifications for different R&S®FSH part numbers

The specifications for part number 1309.6000.54 are equivalent to part number 1309.6000.04.

The specifications for part number 1309.6000.64 are equivalent to part number 1309.6000.14.

The specifications for part number 1309.6000.74 are equivalent to part number 1309.6000.24.

The specifications for part number 1309.6000.58 are equivalent to part number 1309.6000.08.

The specifications for part number 1309.6000.68 are equivalent to part number 1309.6000.18.

The specifications for part number 1309.6000.78 are equivalent to part number 1309.6000.28.

The specifications for part number 1314.2000.63 are equivalent to part number 1314.2000.13.

The specifications for part number 1314.2000.70 are equivalent to part number 1314.2000.20.

The specifications for part number 1314.2000.73 are equivalent to part number 1314.2000.23.

The specifications for part number 1314.2000.80 are equivalent to part number 1314.2000.30.


Accessories

R&S®FSH-Z14 directional power sensor


Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR	referenced to 50 Ω	< 1.06
Power-handling capacity	depending on temperature and matching (see diagram on page 32)	100 W to 1000 W
Insertion loss		≤ 0.06 dB, typ. ≤ 0.04 dB
Directivity		> 30 dB
Average power		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope	30 mW to 300 W
Modulated signals	power to average power	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
Temperature coefficient	EDGE, TETRA	±0.5 % of measured value (±0.02 dB) ¹³
	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

¹³ If standard is selected on the R&S®FSH4/R&S®FSH8.

Maximum peak envelope power		
Power measurement range		
Video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate $\geq 100/s$	
	video bandwidth 4 kHz	$\pm(3\%$ of measured value + 0.05 W), starting from a burst width of 200 μs
	video bandwidth 200 kHz	$\pm(7\%$ of measured value + 0.20 W), starting from a burst width of 4 μs
	video bandwidth 600 kHz	$\pm(7\%$ of measured value + 0.40 W), starting from a burst width of 2 μs
	20/s \leq repetition rate < 100/s 0.001 \leq duty cycle < 0.1	plus $\pm(1.6\%$ of measured value + 0.15 W) plus ± 0.10 W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)
Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		> 1.15
Minimum forward power	specifications complied with ≥ 0.4 W	0.06 W
Dimensions (W × H × D)		120 mm × 95 mm × 39 mm (4.72 in × 3.74 in × 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

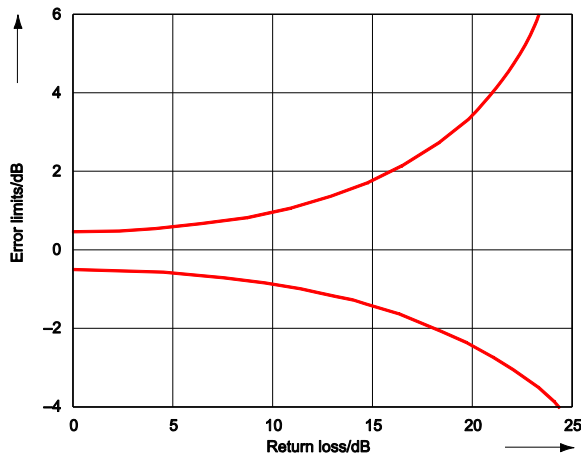

Error limits for matching measurements

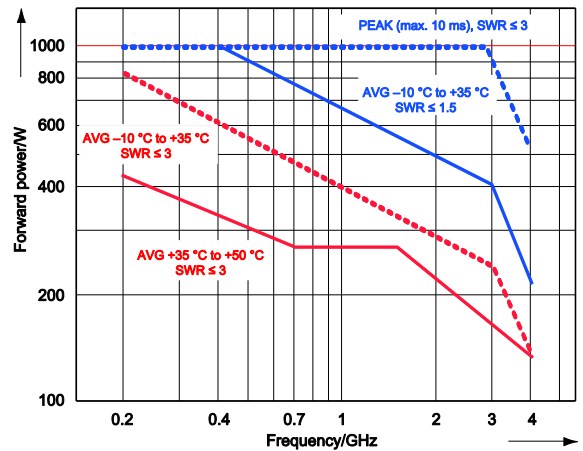


Power-handling capacity

R&S®FSH-Z44 directional power sensor


Frequency range		200 MHz to 4 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07
	3 GHz to 4 GHz	< 1.12
Power-handling capacity	depending on temperature and matching (see diagram on page 34)	120 W to 1000 W
Insertion loss	200 MHz to 1.5 GHz	≤ 0.06 dB, typ. ≤ 0.04 dB
	1.5 GHz to 4 GHz	≤ 0.10 dB, typ. ≤ 0.07 dB
Directivity	200 MHz to 3 GHz	> 30 dB
	3 GHz to 4 GHz	> 26 dB
Average power		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	LTE, 3GPP WCDMA, cdmaOne, CDMA2000, DAB, DVB-T	30 mW to 120 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset	
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	π/4-DQPSK	±2 % of measured value (±0.09 dB)
	EDGE	±0.5 % of measured value (±0.02 dB) ¹⁴
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) ¹⁴
	3GPP WCDMA, CDMA2000	±2 % of measured value (±0.09 dB) ¹⁴
	DVB-T	±2 % of measured value (±0.09 dB) ¹⁴
Temperature coefficient	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)
Maximum peak envelope power		
Power measurement range		
DAB, DVB-T, cdmaOne, CDMA2000, 3GPP WCDMA		4 W to 300 W
Other signals at video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s	
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W), starting from a burst width of 100 μs
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W), starting from a burst width of 4 μs
	video bandwidth 4 MHz	±(7 % of measured value + 0.40 W), starting from a burst width of 1 μs
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W
	burst width ≥ 0.5 μs	plus ±5 % of measured value
	burst width ≥ 0.2 μs	plus ±10 % of measured value
Range of typical measurement error of peak hold circuit	video bandwidth 4 MHz and standard selected on the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20	
	cdmaOne, DAB	±(5 % of measured value + 0.4 W)
	DVB-T, CDMA2000, 3GPP WCDMA	±(15 % of measured value + 0.4 W)
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)

¹⁴ If standard is selected on the R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20.

Load matching		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specifications complied with ≥ 0.2 W	0.03 W
Dimensions (W × H × D)		120 mm × 95 mm × 39 mm (4.72 in × 3.74 in × 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

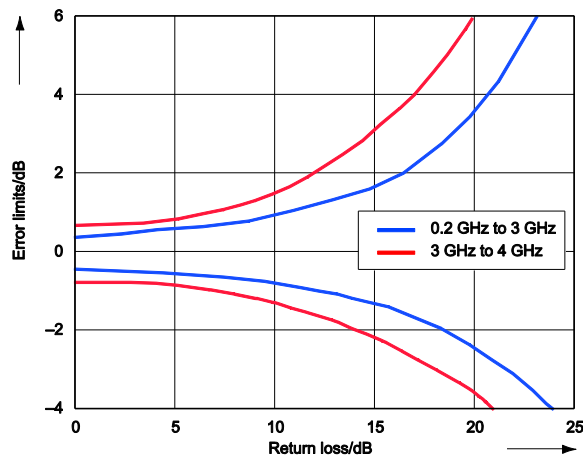

Error limits for matching measurements

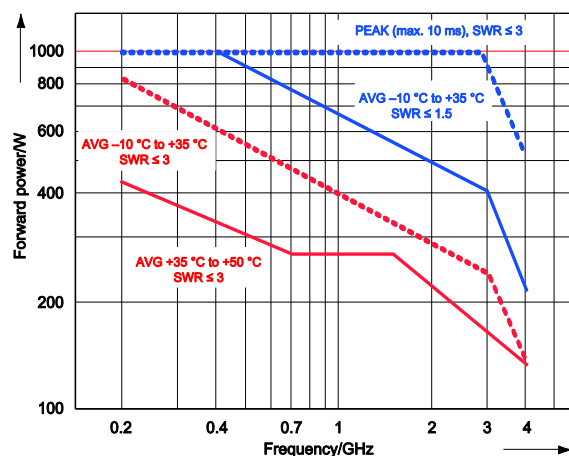

Power-handling capacity

R&S®HA-Z240 GPS receiver

GPS location indication		latitude, longitude
Reference frequency uncertainty	GPS on, ≥ 1 min after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 min after losing satellite lock	$\pm 5 \times 10^{-8}$
Temperature	operating temperature range	-20 °C to $+55$ °C
	storage temperature range	-40 °C to $+70$ °C
Climatic loading	GPS receiver module	IPX7 level, in line with IEC 60529
Connector		7-contact male (type: Binder 712)
Power consumption		0.45 W
Test marks		FCC, CE
Dimensions	diameter × height	61 mm × 19.5 mm (2.4 in × 0.8 in)
	cable length	5 m (16.4 ft)
Weight		200 g (0.4 lb)

R&S®FSH-Z114 precision frequency reference

Temperature	operating temperature range	-10 °C to $+55$ °C
	storage temperature range	-55 °C to $+90$ °C
Climatic loading	relative humidity	$+25$ °C/ $+55$ °C at 95 % relative humidity, in line with EN 60068-2-30
	protection class	IP51
Connector		7-contact male (type: Binder 712)
Power consumption		0.20 W
Dimensions	diameter × height	88 mm × 94 mm × 26 mm (3.5 in × 3.5 in × 0.8 in)
	cable length	0.25 m (0.82 ft)
Weight		250 g (0.6 lb)

Ordering information

Designation	Type	Order No.
Spectrum analyzer, 9 kHz to 3.6 GHz, with preamplifier	R&S®FSH4	1309.6000.04
Spectrum analyzer, 9 kHz to 3.6 GHz, with preamplifier and tracking generator	R&S®FSH4	1309.6000.14
Spectrum analyzer, 100 kHz to 3.6 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH4	1309.6000.24
Spectrum analyzer, 9 kHz to 8 GHz, with preamplifier	R&S®FSH8	1309.6000.08
Spectrum analyzer, 9 kHz to 8 GHz, with preamplifier and tracking generator	R&S®FSH8	1309.6000.18
Spectrum analyzer, 100 kHz to 8 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH8	1309.6000.28
Spectrum analyzer, 9 kHz to 13.6 GHz, with preamplifier	R&S®FSH13	1314.2000.13
Spectrum analyzer, 9 kHz to 20 GHz, with preamplifier	R&S®FSH20	1314.2000.20
Spectrum analyzer, 9 kHz to 13.6 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH13	1314.2000.23
Spectrum analyzer, 9 kHz to 20 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH20	1314.2000.30
Accessories supplied		
Lithium-ion battery pack, USB cable, LAN cable, AC power supply, CD-ROM with R&S®FSH4View software and documentation, quick start guide		

Options

Designation	Type	Order No.	Remarks
Hardware option			
Precision frequency reference	R&S®FSH-Z114	1304.5935.02	
Software options			
GSM edge measurement application	R&S®FSH-K10	1304.5864.02	
Spectrogram measurement application	R&S®FSH-K14	1304.5770.02	
Interference analysis measurement application	R&S®FSH-K15	1309.7488.02	
Geotagging measurement application	R&S®FSH-K16	1309.7494.02	
Indoor mapping measurement application	R&S®FSH-K17	1304.5893.02	
Segmented sweep	R&S®FSH-K20	1318.6600.02	
Pulse measurements with power sensor	R&S®FSH-K29	1304.5993.02	requires a power sensor R&S®NRP-Z81, R&S®NRP-Z85 or R&S®NRP-Z86 ¹⁵
Remote control via LAN or USB	R&S®FSH-K40	1304.5606.02	
Distance-to-fault analysis	R&S®FSH-K41	1304.5612.02	for models .23/.24/.28/.30 only, R&S®FSH-Z320 or R&S®FSH-Z321 and R&S®FSH-Z28 or R&S®FSH-Z29 recommended
Vector network analysis	R&S®FSH-K42	1304.5629.02	for models .24/.28 only, standard for models .23/.30
Vector voltmeter	R&S®FSH-K45	1304.5658.02	for models .23/.24/.28/.30 only
Receiver mode and channel scan measurement application	R&S®FSH-K43	1304.5635.02	
3GPP WCDMA BTS/NodeB pilot channel and EVM measurement application	R&S®FSH-K44	1304.5641.02	
3GPP WCDMA BTS/NodeB code domain power and EVM measurement application	R&S®FSH-K44E	1304.5758.02	R&S®FSH-K44 required
CDMA2000® BTS pilot channel and EVM measurement application	R&S®FSH-K46	1304.5729.02	
CDMA2000 BTS code domain power measurement application	R&S®FSH-K46E	1304.5764.02	R&S®FSH-K46 required
1xEV-DO BTS pilot channel and EVM measurement application	R&S®FSH-K47	1304.5787.02	
1xEV-DO BTS PN scanner and time domain power measurement application	R&S®FSH-K47E	1304.5806.02	R&S®FSH-K47 required
3GPP TD-SCDMA BTS power and P-CCPCH EVM measurement application	R&S®FSH-K48	1304.5841.02	
3GPP TD-SCDMA/HSDPA BTS code domain power and EVM measurement application	R&S®FSH-K48E	1304.5858.02	R&S®FSH-K48 required
LTE FDD downlink pilot channel and EVM measurement application	R&S®FSH-K50	1304.5735.02	only for R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20
LTE FDD downlink extended channel and modulation measurement application	R&S®FSH-K50E	1304.5793.02	only for R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20, R&S®FSH-K50 required
LTE TDD downlink pilot channel and EVM measurement application	R&S®FSH-K51	1304.5812.02	only for R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20
LTE TDD downlink extended channel and modulation measurement application	R&S®FSH-K51E	1304.5829.02	only for R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20, R&S®FSH-K51 required
NB-IoT measurement application	R&S®FSH-K56	1318.6100.02	only for R&S®FSH4/R&S®FSH8 with serial number ≥ 105000, R&S®FSH13/R&S®FSH20
EMF measurement application	R&S®FSH-K105	1318.6200.02	see required options according to page 27

¹⁵ The R&S®NRP-Z8x power sensors are supported by instruments with serial number ≥ 105000.

For instruments with serial number < 121000, the R&S®FSH-Z129 adapter cable is required in addition.

Accessories

Designation	Type	Order No.
RF cable, DC to 8 GHz, armored, N (m)/N (f) connectors, length: 1 m	R&S®FSH-Z320	1309.6600.00
RF cable, DC to 8 GHz, armored, N (m)/N (f) connectors, length: 3 m	R&S®FSH-Z321	1309.6617.00
Combined open/short/50 Ω load calibration standard, DC to 3.6 GHz	R&S®FSH-Z29	1300.7510.03
Combined open/short/50 Ω load calibration standard, DC to 8 GHz	R&S®FSH-Z28	1300.7810.03
Combined open/short/50 Ω load/through calibration standard, DC to 15 GHz, 3.5 mm male	R&S®ZV-Z135	1317.7677.02
Combined open/short/50 Ω load/through calibration standard, DC to 15 GHz, 3.5 mm female	R&S®ZV-Z135	1317.7677.03
Combined open/short/50 Ω load/through calibration standard, DC to 9 GHz, N male	R&S®ZV-Z170	1317.7683.02
Combined open/short/50 Ω load/through calibration standard, DC to 9 GHz, N female	R&S®ZV-Z170	1317.7683.03
Matching pad, 50 Ω/75 Ω, L section	R&S®RAM	0358.5414.02
Matching pad, 50 Ω/75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching pad, 50 Ω/75 Ω, L section, N to BNC	R&S®FSH-Z38	1300.7740.02
Adapter, N (m) to BNC (f)		0118.2812.00
Adapter, N (m) to N (m)		0092.6581.00
Adapter, N (m) to SMA (f)		4012.5837.00
Adapter, N (m) to 7/16 (f)		3530.6646.00
Adapter, N (m) to 7/16 (m)		3530.6630.00
Adapter, N (m) to FME (f)		4048.9790.00
Adapter, BNC (m) – banana (f)		0017.6742.00
Attenuator, 50 W, 20 dB, 50 Ω, DC to 6 GHz, N (f) to N (m)	R&S®RDL50	1035.1700.52
Attenuator, 100 W, 20 dB, 50 Ω, DC to 2 GHz, N (f) to N (m)	R&S®RBU100	1073.8495.20
Attenuator, 100 W, 30 dB, 50 Ω, DC to 2 GHz, N (f) to N (m)	R&S®RBU100	1073.8495.30
12 V car adapter for cigarette lighter ¹⁶	R&S®HA-Z202	1309.6117.00
Lithium-ion battery pack, 6.3 Ah	R&S®HA-Z206	1309.6146.00
Battery charger for R&S®HA-Z204 and R&S®HA-Z206 lithium-ion battery pack ¹⁷	R&S®HA-Z203	1309.6123.00
Soft carrying bag	R&S®HA-Z220	1309.6175.00
Hard case for handhelds	R&S®HA-Z321	1321.1357.02
Carrying holster, including chest harness and rain cover	R&S®HA-Z222	1309.6198.00
Shoulder strap for R&S®HA-Z222 carrying holster	R&S®HA-Z223	1309.6075.00
SD memory card, 4 Gbyte ¹⁸	R&S®HA-Z232	1309.6223.00
Headphones	R&S®FSH-Z36	1145.5838.02
GSM/UMTS/CDMA antenna magnetic mount 850/900/1800/1900/2100 band, N connector	R&S®TS95A16	1118.6943.16
Near-field probe set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Spare USB cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet cable	R&S®HA-Z210	1309.6152.00
Spare power supply, incl. mains plug for EU, GB, US	R&S®HA-Z201	1309.6100.00
Power cord + adapter for R&S®HA-Z201 power supply (changes the power supply to laptop style)		
Power cord EU	R&S®HA-Z209	1309.7465.02
Power cord GB	R&S®HA-Z209	1309.7465.03
Power cord US/JP	R&S®HA-Z209	1309.7465.04
Power cord AUS	R&S®HA-Z209	1309.7465.05
GPS receiver	R&S®HA-Z240	1309.6700.03
Spare CD-ROM, including R&S®FSH4View software and operating manual for R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20	R&S®FSH-Z45	1309.6246.00
Spare printed quick start guide for R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, English	R&S®FSH-Z46	1318.5332.02
Spare printed quick start guide for R&S®FSH4/R&S®FSH8/R&S®FSH13/R&S®FSH20, German	R&S®FSH-Z47	1318.5332.03

¹⁶ The car adapter is suitable for both the instrument and the R&S®HA-Z203 external battery charger.

¹⁷ The battery charger is dedicated for charging an additional battery outside the instrument. The internal battery is charged by the instrument itself.

¹⁸ Firmware update is installed from SD memory card.

Designation	Type	Order No.
Portable system for EMVU measurements		
Hard case	R&S®TS-EMF	1158.9295.05
Isotropic antenna, 30 MHz to 3 GHz, for R&S®TS-EMF	R&S®TSEMF-B1	1074.5719.02
Isotropic antenna, 700 MHz to 6 GHz, for R&S®TS-EMF	R&S®TSEMF-B2	1074.5702.02
Isotropic antenna, 9 kHz to 200 MHz, for R&S®TS-EMF	R&S®TSEMF-B3	1074.5690.02
Calibration unit, 2 MHz to 4 GHz, for R&S®FSH .23/.24/.28/.30 models	R&S®ZN-Z103	1321.1828.02
Calibration unit, 1 MHz to 6 GHz, for R&S®FSH .23/.24/.28/.30 models	R&S®ZN-Z103	1321.1828.12

Power sensors supported by the R&S®FSH-K9 option ^{19, 20, 21}

Designation	Type	Order No.
Directional power sensors		
30 mW to 300 W, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
30 mW to 300 W, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
Universal power sensors		
1 nW to 100 mW, 10 MHz to 8 GHz, two-path	R&S®NRP-Z211	1417.0409.02
1 nW to 100 mW, 10 MHz to 18 GHz, two-path	R&S®NRP-Z221	1417.0309.02
Wideband power sensors		
1 nW to 100 mW, 50 MHz to 18 GHz ²²	R&S®NRP-Z81	1137.9009.02
1 nW to 100 mW, 50 MHz to 40 GHz (2.92 mm) ²²	R&S®NRP-Z85	1411.7501.02
1 nW to 100 mW, 50 MHz to 40 GHz (2.40 mm) ²²	R&S®NRP-Z86	1417.0109.40
1 nW to 100 mW, 50 MHz to 44 GHz (2.40 mm) ²²	R&S®NRP-Z86	1417.0109.44
Three-path diode power sensors		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 50 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
100 pW to 200 mW, 50 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
Average power sensors		
100 pW to 200 mW, 8 kHz to 6 GHz	R&S®NRP6A	1424.6796.02
100 pW to 200 mW, 8 kHz to 18 GHz	R&S®NRP18A	1424.6815.02
Pulse power sensors		
1 nW to 100 mW, 50 MHz to 18 GHz ²³	R&S®NRP18P	1444.1190.02
1 nW to 100 mW, 50 MHz to 40 GHz (2.92 mm) ²³	R&S®NRP40P	1444.1290.02
1 nW to 100 mW, 50 MHz to 18 GHz (2.40 mm) ²³	R&S®NRP50P	1444.1390.02
Thermal power sensors		
300 nW to 100 mW, DC to 18 GHz	R&S®NRP18T	1424.6115.02
300 nW to 100 mW, DC to 33 GHz	R&S®NRP33T	1424.6138.02
300 nW to 100 mW, DC to 40 GHz	R&S®NRP40T	1424.6150.02
300 nW to 100 mW, DC to 50 GHz	R&S®NRP50T	1424.6173.02
300 nW to 100 mW, DC to 67 GHz	R&S®NRP67T	1424.6196.02
300 nW to 100 mW, DC to 110 GHz	R&S®NRP110T	1424.6215.02

R&S®NRP power sensors require the following adapter cable for operation on the R&S®FSH		
Passive USB adapter to connect R&S®NRP power sensors to the R&S®FSH	R&S®NRP-Z4	1146.8001.02
R&S®FSH power sensors require the following adapter cable for connection to a PC		
USB adapter cable for R&S®FSH-Z14/R&S®FSH-Z44	R&S®FSH-Z144	1145.5909.02
R&S®NRP-Z8x power sensors require the following adapter cable for operation on the R&S®FSH		
Adapter cable for R&S®NRP-Z8x	R&S®FSH-Z129	1304.5887.00
R&S®NRP power sensors require the following adapter cable for operation on the R&S®FSH		
USB interface cable, length: 1.5 m, to connect R&S®NRP power sensors to the R&S®FSH	R&S®NRP-ZKU	1419.0658.03

¹⁹ For average power measurements only.

²⁰ R&S®NRP power sensors are supported by instruments with serial number ≥ 105000 .

²¹ Wideband power sensors require the R&S®FSH-Z129 adapter cable for instruments with serial number < 121000 . Otherwise, R&S®NRP-Z4 is suitable.

²² Product discontinued.

²³ Peak power measurements supported by the R&S®FSH-K29 option.

Optical power sensors and accessories

Designation	Type	Order No.
OEM USB optical power meter (Germanium)	R&S®HA-Z360	1334.5162.00
OEM USB optical power meter (filtered InGaAs)	R&S®HA-Z361	1334.5179.00
SC adapter, for optical power meter	R&S®HA-Z362	1334.5185.00
LC adapter, for optical power meter	R&S®HA-Z363	1334.5191.00
2.5 mm universal adapter, for optical power meter	R&S®HA-Z364	1334.5204.00
1.25 mm universal adapter, for optical power meter	R&S®HA-Z365	1334.5210.00
Patch cord SC-LC SM, SX, length: 1 m	R&S®HA-Z366	1334.5227.00
Patch cord SC-SC SM, SX, length: 1 m	R&S®HA-Z367	1334.5233.00

Antenna and accessories

Designation	Type	Order No.
Handheld directional antenna (antenna handle)	R&S®HE400	4104.6000.02
HF antenna module, 8.3 kHz to 30 MHz	R&S®HE400HF	4104.8002.02
VHF antenna module, 20 MHz to 200 MHz	R&S®HE400VHF	4104.8202.02
UWB antenna module, 30 MHz to 6 GHz	R&S®HE400UWB	4104.6900.02
Log-periodic antenna module, 450 MHz to 8 GHz	R&S®HE400LP	4104.8402.02
Cellular antenna module, 700 MHz to 2500 MHz	R&S®HE400CEL	4104.7306.02
Isotropic antenna, 700 MHz to 8 GHz	R&S®TSEMF-B2E	1074.5702.03
Cable set for R&S®HE400 and R&S®PR100 or R&S®FSH	R&S®HE400-K	4104.7770.02
Transport case for R&S®HE400	R&S®HE400Z1	4104.9009.02
Transport bag (small) for R&S®HE400 (recommended for one or two antenna modules)	R&S®HE400Z2	4104.9050.02
Transport bag (large) for R&S®HE400 (recommended for three or four antenna modules)	R&S®HE400Z3	4104.9080.02
Tripod for R&S®HE400	R&S®HE400Z4	4104.9109.02

Warranty and service

Warranty		
Base unit		3 years
All other items ²⁴		1 year
Service options		
	Service plans	On demand
Calibration	up to five years ²⁵	pay per calibration
Warranty and repair	up to five years ²⁵	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

²⁴ For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

²⁵ For extended periods, contact your Rohde & Schwarz sales office.

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

More certificates of Rohde & Schwarz



Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support



R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners
PD 5214.0482.22 | Version 33.00 | September 2025 (as/jr)
R&S®FSH Handheld Spectrum Analyzer
Data without tolerance limits is not binding | Subject to change
© 2008 - 2025 Rohde & Schwarz | 81671 Munich, Germany