



Current Transformer

CT Series



CT Series Current Transformers provide an economical solution for energy monitoring and electrical measurements with its compact design.

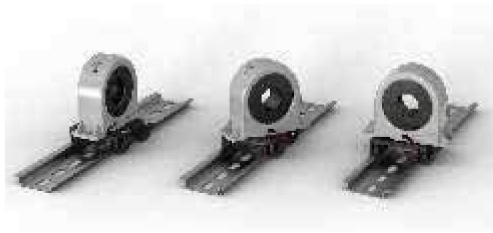

L.V. Current Transformer	Tip	Compatible ENTES Products*		
		Maximum Nominal Current		
		80 A	120 A	210 A
 (for ENTES For ENTES Digital Measuring Devices only)	CT-25		MPR-53 EPM-04h MPR-53S EPM-06 EPR-04 EPM-06C EPR-04S EPM-06CS EPM-04 EPM-07 EPM-04C EPM-07S EPM-04CS	EPM-4A EPM-4C EPM-4P EPM-R4C AKC-03
	CT-80D (only suitable for ES-80L)	ES-80L		

Technical Features

	CT-25	CT-80 D (Only suitable for ES-80L)
Transformer Ratio	1/2500	1/2500
Inner Diameter	15,5 mm (70 mm ² cable)	13 mm (35 mm ² cable)
Outer Diameter	43 mm	47,5 mm
Primer Nominal Current	210 A	80 A
Seconder Nominal Current	0,084 A	0,032 A
Operating Temperature	-40 °C ..+70 °C	-40 °C ..+70 °C
Frequency	50 Hz	50 Hz

* CT-25 current transformer can be used with only the versions compatible with CT-25 of the models mentioned on the table.
Please contact to your sales responsible for the compatibility of your selected product.

Dimensions (CT-25)

