

PD-C 360i/8 mini DALI

Order description

PD-C 360i/8 mini DALI

Item number

EP10427510

GTIN

4015120427510



Technical data

GENERAL	
Special product features	Twilight switch
Conformity	CE, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 45 mm, Ø 25 mm
HOUSING	
Dimensions	Height/Depth 60 mm, Ø 33 mm
Weight	25 g
Material	UV-stabilised PE
Protection type	IP55
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 95 %, non-condensing
Colour	Opal matt
Connection	2,5 mm ² / 1,5 mm ²
ELECTRICAL VERSION	
Protection class	III
Nominal voltage	9,5 - 22,5 V
Power consumption	0,3 W
Power consumption	12 mA
SENSORS	
Detection angle	360°

Product description

- Presence detector with 360° field of detection for ceiling mounting
- Range of up to 8m in diameter at a recommended installation height of 3 m
- Automatic light control of DALI electronic ballasts to achieve a constant brightness level, depending on presence and natural light (with DALI-output)
- Can be combined with DALI push buttons
- HVAC and potential-free contact possible in conjunction with DALI switch from ESYLUX

Detection range diagonally	Ø 8 m
Detection range head-on	Ø 5 m
Detection range presence	Ø 3 m
Field of detection	up to 50 m ²
Recommended installation height	3 m
Max. mounting height	3 m
Light measurement	mixed light
Level of brightness	10 - 2000 lx
Number of light channels	1
Number of switching contacts	2
Push button input HVAC	false
Slave input	yes, via DALI
Fully automatic	yes
Semi-automatic	yes
constant lighting control	true
Switching delay from "dark to light" [s]	300 s
Switching delay from "light to dark" [s]	30 s

CONTROL


Channel 1	Lighting
Interface	Switching/Dimming
Contact	Bus system
Switch-off delay time	disabled/approx. 1 minute – 240 minutes
Orientation light	10 % to 40 % luminous efficiency
Switch-off delay time, orientation light	disabled/approx. 1 minute – 240 minutes
Orientation light	10 % to 40 % luminous efficiency
Switch-off delay time, orientation light	disabled/approx. 1 minute – 240 minutes
No. of electric ballasts	any number

PD-C 360i/8 mini DALI


Order description	Item number	GTIN
PD-C 360i/8 mini DALI	EP10427510	4015120427510
Bus voltage	9.5–22.5 V DC	
Master/slave function	true	
constant lighting control	true	

Manual override	yes, via IR
Light channel	DALI
DALI output 1	DALI bus / Broadcast

Scale drawing




Field of detections



- Operating area approx. \varnothing 3 m
- Head-on to detector approx. \varnothing 5 m
- Passage area / diagonally to detector approx. \varnothing 8 m

Circuit diagram

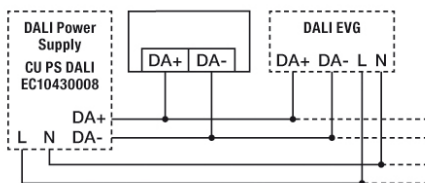

Standard operation

Circuit diagram

Master/Slave mode