


DC VOLTAGE MONITORING RELAY

Type: BMWB

FEATURES


- Includes two relays for use in parallel or for individual under and over voltage signalisation
- Accurate adjustment for upper limit, upper return, lower limit and lower return by means of multiturn potentiometers
- Easy dipswitch setting selects function as under and over voltage relay, window relay or under or over voltage relay only
- LEDs indicate the state of the input
- LED indicates the state of the relay
- LEDs indicate when the timing function is active

FUNCTION DIAGRAM

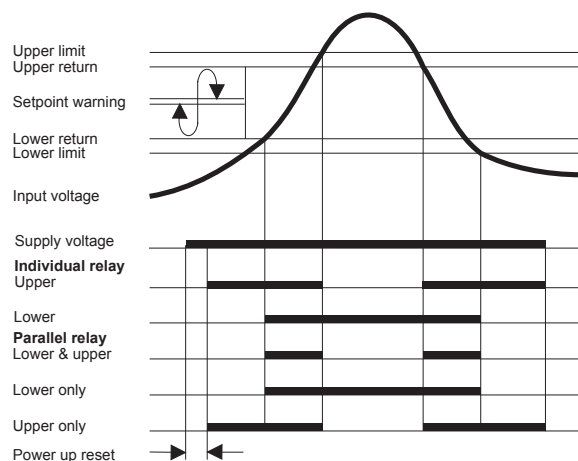

CONNECTION DIAGRAM

Rail mounting

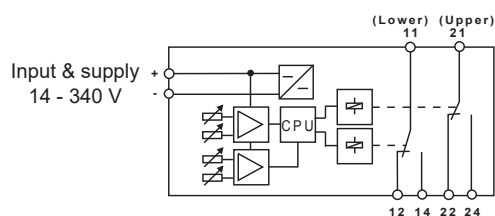

Description:

BMWB is a combined over and/or under voltage relay.

The voltage relay is designed for precise monitoring of a wide range of DC voltages from 14V to 340V.

With a built-in high efficiency switch mode power supply, the BMWB is able to cover the whole measuring range without the need of an external supply.

The BMWB can by means of dipswitches be set to work as a relay for monitoring under voltage and over voltage with two individual C/O contacts, or the contacts can be paralleled and the BMWB be used as a window discriminator relay where both C/O contacts are in the powerless position outside the window. With the paralleled relays the BMWB can be set to only register under or over voltage.

Operation:

When the supply voltage is applied, the - power up reset - period begins. If a voltage within the allowed voltage range is applied to the input, the internal relay pulls in at the end of the reset period.

If the input voltage exceeds the adjusted upper or lower limit, the corresponding relay or both relays drops out.

If the input voltage comes between the upper return and the lower return, the relay pulls in.


As under voltage relay only, the relays remain energized for input voltages exceeding the upper limit.

As over voltage relay only, the relay remains energized for input voltage under the lower range limit, until it drops out due to power loss at inputs below 14 V.

Application:

Voltage monitoring in UPS, stationary and mobile battery installations.

PROGRAMMABLE FEATURES

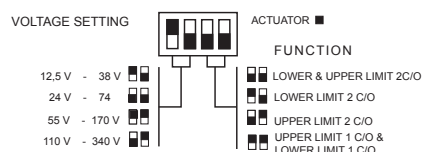

LED explanation:

Setpoint warning LED:

- LED off: Upper limit & lower limit OK
- Constant red: Upper limit & lower limit inversed


Upper limit LED:

- Pulses Green / Red: Relay going towards Off (21-22 closing)
- Pulses Green / LED off: Relay going towards On (22-24 closing)
- Constant Green: Relay On
- Constant Red: Relay Off, input beyond upper limit
- LED off: Relay Off

Lower limit LED:

- Pulses Green / Red: Going towards Off (11-12 closing)
- Pulses Green / LED off: Going towards On (12-14 closing)
- Constant Green: Relay On
- Constant Red: Relay Off, input beyond lower limit
- LED off: Relay Off

SPECIFICATIONS

INPUT		DC voltage 0 - 340 V
Ranges selectable by dipswitch	14 V -	38 V
	24 V -	74 V
	55 V -	170 V
	110 V -	340 V
Differential	Adjustable within upper and lower limit	
PERFORMANCE PARAMETERS		
TIMING		
Response time	Approx. 200 msec.	
Time range during run	Separate On and Off delay	
	0 - 10 sec. adjustable	
ELECTRICAL		
Temp. dependence	Typ. $\pm 0.02\%$ / °C	
OUTPUT		
Contact rating	Relay, 2 x 1 C/O, AgNi/Au	
	6 A, 250 VAC, 1500 W	
	See figure	
Mechanical life	30 million operations	
SUPPLY		
DC voltage direct from input	14 - 340 Volts (Max. 360V)	
Voltage range	Max 3 W	
Power consumption		
GENERAL		
Temperature range	- 25 °C to + 55 °C ambient	
Humidity	Up to 90 % RH non-condensing	
Dielectric test voltage	Coil to relay contacts	4000 VAC
	Pole to pole	2500 VAC
Weight Nett.	0.15 kg	
		
EMC directive 89/336:	International Standards	
	EN50081 - Emission	
	EN50082 - Immunity	
Low voltage directive 73/23:	EN60255 - Electrical Relays	

ORDERING INFORMATION

EXAMPLE:		BMW B	1434	D	A	3	C
TYPE	DC voltage monitoring control relay	BMW B					
INPUT AND SUPPLY VOLTAGE	14 V - 340 V DC	1434					
ADJUSTMENT	Trimpot and dipswitch adj.	D					
HOUSING	Rail mounting	A					
SIZE	35 mm.	3					
CODE END		C					

Relay Contacts:

