



Sample image

Datasheet

Article number: 70009138

Designation: KG10B.T203/09.VE


Description: Switch Global Disconnecter


IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC 690 50/60Hz						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
20	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category					Voltage (V)	Current (A)
AC-15					220 - 240	6
AC-15					380 - 440	4
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	2,20		
AC-3	380 - 440	3	3	3,70		
AC-3	660 - 690	3	3	3,70		
AC-3	220 - 240	1	2	1,10		
AC-3	380 - 440	1	2	1,50		
AC-23A	220 - 240	3	3	3		
AC-23A	380 - 440	3	3	5,50		
AC-23A	660 - 690	3	3	5,50		
AC-23A	220 - 240	1	2	1,50		
AC-23A	380 - 440	1	2	2,20		
Max. Fuse rating IEC						
Fuse characteristic					No. of Fuses	Current (A)
gG					1	20
Tested AC and DC values						
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)	
DC-13	1	ON - OFF	24	DC	3	
DC-13	1	ON - OFF	220	DC	0,15	
DC-21A	1	ON - OFF	24	DC	16	
DC-21A	1	ON - OFF	220	DC	0,90	
DC-23A	1	ON - OFF	24	DC	13	
DC-23A	1	ON - OFF	220	DC	0,20	
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC 300 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC 300 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)		Additional Text		
20		0 - 40		--		
20		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 220	1	2	0,50	40	
DOL	220 - 240	1	2	1	40	
DOL	277 - 277	1	2	1	40	
DOL	110 - 120	3	3	1	40	
DOL	220 - 240	3	3	2	40	
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			- Use copper wire only			

Connecting instructions						
<i>Markings</i>						
Break all lines.						
For use on a flat surface of a type 1 enclosure.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
General Information						
<i>Text</i>						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
Voltage (V) AC / DC						
300 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
300 AC						
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		20	0 - 40		--	
		20	0 - 40		--	
Horsepower rating						
<i>Across-the-Line Motor Starting</i>						
	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 220	1	2	0,50	40	
DOL	220 - 240	1	2	1	40	
DOL	277 - 277	1	2	1	40	
DOL	110 - 120	3	3	1	40	
DOL	220 - 240	3	3	2	40	
Pilot duty rating code						
<i>Duty Code</i>						
A300						
Temp. rating of wire						
		Temperature rating (°C)	Current (A)		Text	
		75	--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	
AC	277	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
<i>composition of conductor</i>	<i>Min. / Max. value</i>	<i>No. of conductor per terminal</i>		<i>Cross section (mm²) or (AWG/kcmil)</i>	<i>Material of the wire</i>	
Solid wire	Min.	1		0.5mm ²	Copper	
Solid wire	Min.	2		0.5mm ²	Copper	
Flexible wire	Min.	1		0.75mm ²	Copper	
Flexible wire	Min.	2		0.75mm ²	Copper	
Flexible wire	Max.	1		AWG 12	Copper	
Flexible wire	Max.	1		2.5mm ²	Copper	
Single-core or stranded wire	Max.	1		AWG 12	Copper	
Single-core or stranded wire	Max.	1		2.5mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Max.	1		2.5mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Min.	1		0.5mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Min.	2		0.5mm ²	Copper	
Stripping length						
Length (mm) --						
						
Recommended screw driver						
<i>Type of screw driver</i>		Value				
Cross Screwdriver		PH1				
Slot screwdriver according to DIN 5264		0,8x4				
Tightening torque of screws						
		tightening torque (Nm)			tightening torque (lb-in)	
		0,60			5	
Approbations						
<i>Specification</i>						<i>Marking</i>
CE marking						
UK Directives						
UL 60947-4-1; CSA C22.2 No. 60947-4-1						

Approbations		Marking
<i>Specification</i>		
CSA C.22.2 No.14		
GB/T14048.3		<small>GB/T14048.3</small>
General Information		
<i>Text</i>		
<ul style="list-style-type: none"> - Use only copper wires with or without tinned/silver-plated individual wires. Soldering the end of the wire before wiring is not allowed. - Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated. - After wiring, ALL terminal screws must be tightened to the specified torque values. - The protection class of the selected mounting type may vary if optional extras are used. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards. 		
Waste Electrical & Electronic Equipment (WEEE)		
<i>Picture name</i>	<i>Description</i>	
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com	
Proposition 65		
<i>Picture name</i>	<i>Description</i>	
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .	

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

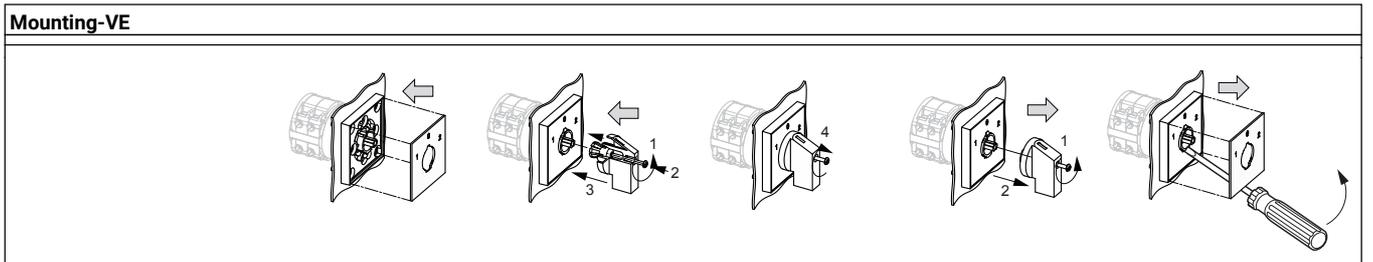


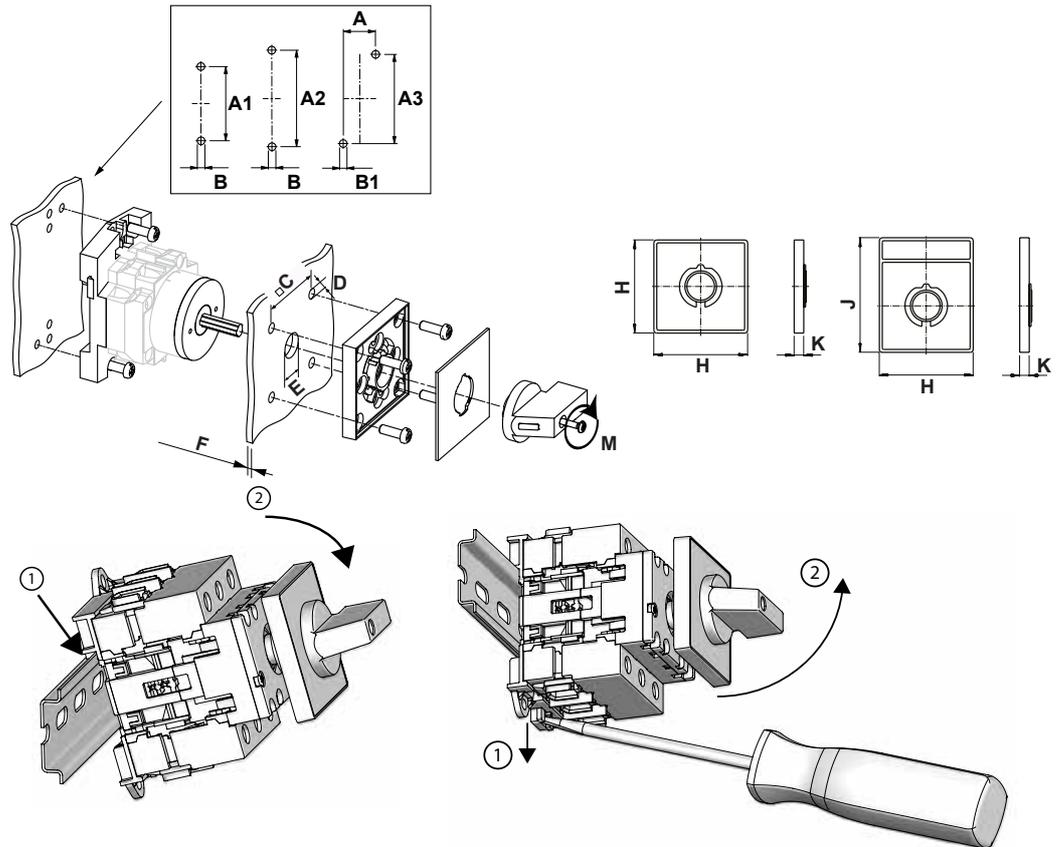

IP - Code front side	IP40
Stages	1,00 - 12,00
A	H 22,00 mm
A1	H 50,00 mm
A2	H 65,00 mm
A3	H 60,00 mm
B	Ø 4,10 mm
B1	Ø 4,20 mm
C	□ 48,00 mm
D	Ø 5,00 mm
E	Ø 10,00 - 15,00 mm
F	H ≤ 27,00 mm
H	H 64,00 mm
J	H 78,00 mm
K	H 7,40 mm
M	⌚ 0,70 Nm


Wiring diagram

KG10B.T303.VE

 Kraus & Naimer		KG10B		T303VE		VE		Page 1 of 1																				
Face Plate																												
		L3	L1			L2																						
		1	3	5	7	9	11	13	15	17	19	21	23															
		Marking plate: S0D H043 91A																										
																												
Switching Angle		90		2		4		6		8		10		12		14		16		18		20		22		24		
Total switching Angle		90		T3		T1		T2																				
0		270																										
		285																										
		300																										
		315																										
		330																										
		345																										
1		0																										
		15																										
		30																										
		45																										
		60																										
		75																										
		90																										
		105																										
		120																										
		135																										
		150																										
		165																										
		180																										
		195																										
		210																										
		225																										
		240																										
		255																										
Look				Pcs.		Optional Extras						Jumpers																
Mounting		VE										1 ● ●3 4 ● ●2 5 ○ ●7 8 ● ○6 9 ○ ○11 12 ○ ○10 13 ○ ○15 16 ○ ○14 17 ○ ○19 20 ○ ○18 21 ○ ○23 24 ○ ○22 25 ○ ○27 28 ○ ○26 29 ○ ○31 32 ○ ○30 33 ○ ○35 36 ○ ○34 37 ○ ○39 40 ○ ○38 41 ○ ○43 44 ○ ○42 45 ○ ○47 48 ○ ○46																
Face Plate																												
Handle																												
Latch. Mech.		E304																										
Stop		S0C.E101.03																										
Stop degree																												
No. of Stages		2																										
Master data		0																										
Reference		HALBERTSCHLAGER																										
Date		2006-11-08 14:38																										
Modify Date		2018-08-01 16:12																										
Cust. NO.																												
Company																												
Version		2																										

Face plate

S1.F456/C10.V11H

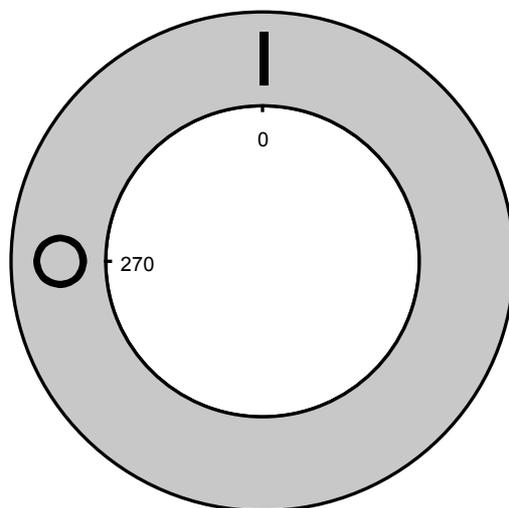



Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/D61/B1


Color of F-handle ring: "D" red

Color of face plate ring: "6" yellow

Locking position: "1" at 270° (1x90°)

Type of mounting: "B" for type of mounting VE

Switch type: "1" for C-switches and for KG10.

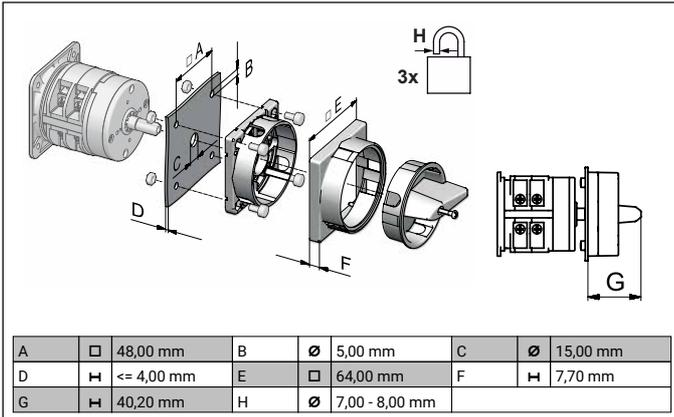



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)





Designation: S1.M280E/B21S-EF/1


Type of interlock: "B2" with protected profile and interlock by door clutch

Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF/1" splash proof (IP66/67) for next smaller switch size

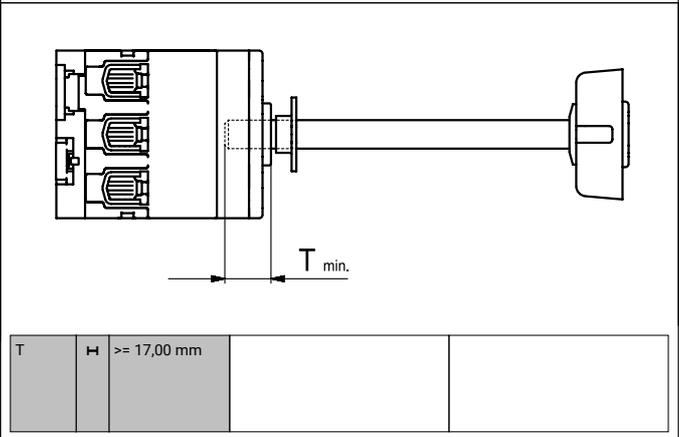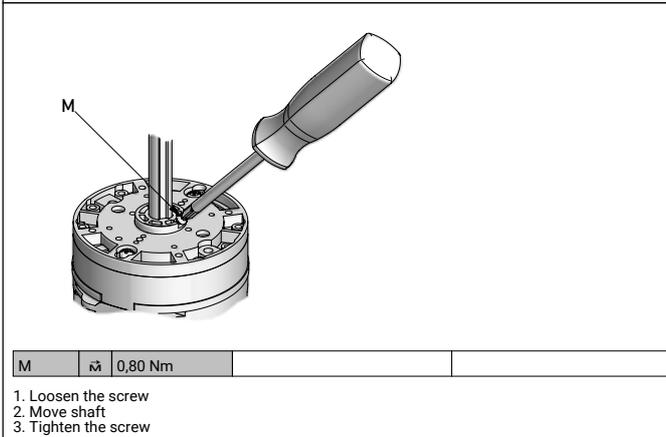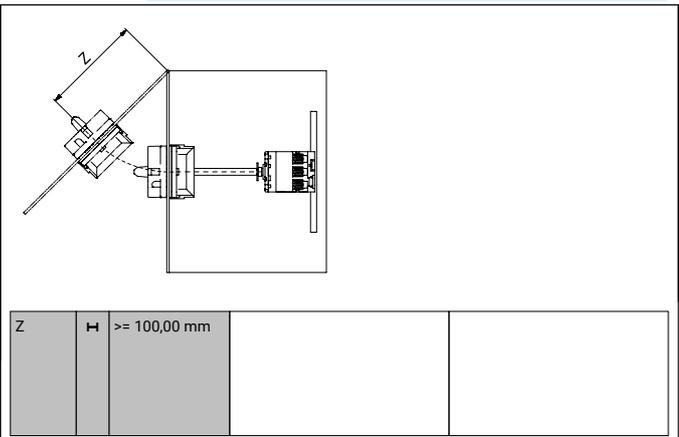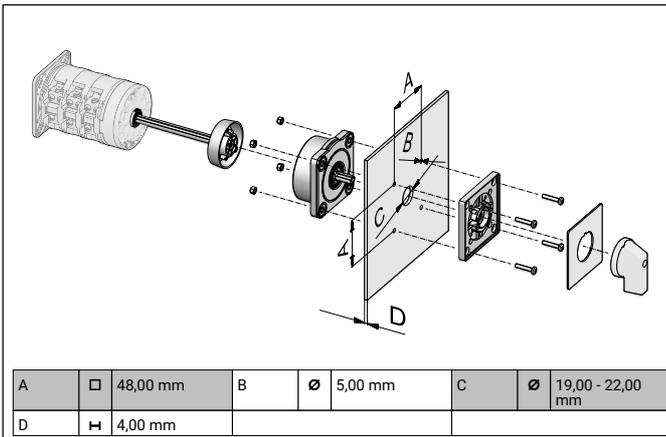

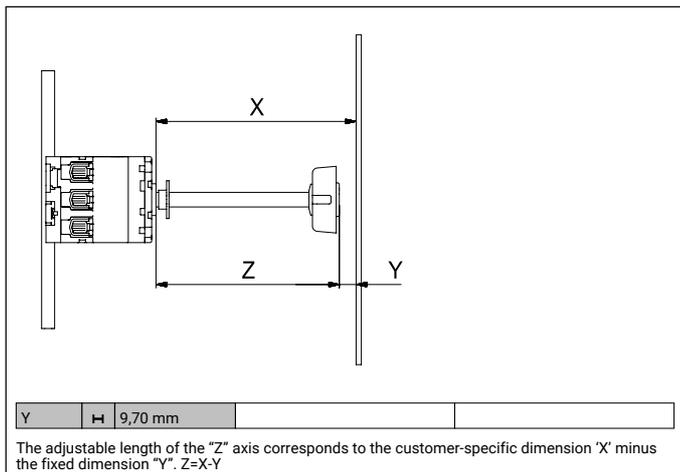

SHAFT EXTENSIONS
in special length for M004D


Designation: S0.M099D/000B140

GENERAL TECHNICAL INFORMATION

Recommended screw driver


Type of screw driver
Cross Screwdriver

Value
PH1

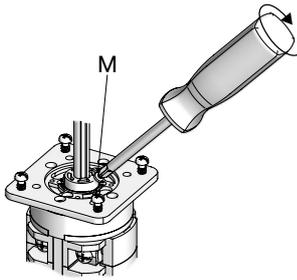

M	↻	0,50 Nm
---	---	---------

1. Loosen the screw
2. Move shaft
3. Tighten the screw

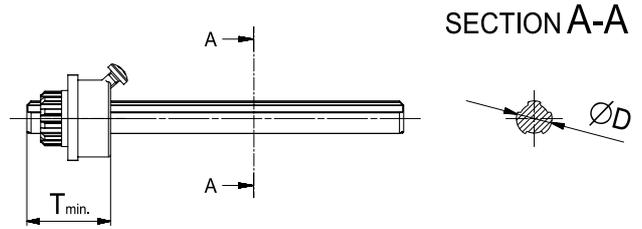

D	H	6,00 mm	T min.	H	16,00 mm	
---	---	---------	--------	---	----------	--