



Features

- Constant Voltage PWM style output with frequency 1KHz
- · Plastic housing with class II design
- Built-in active PFC function
- No load power consumption<0.5W(Blank-Type)
- Function options: 2 in 1 dimming (dim-to-off);
 Auxiliary DC output
- · 3 years warranty


Applications

- LED strip lighting
- · Indoor LED lighting
- · LED decorative lighting
- · LED architecture lighting

Description

IDLV-45 series is a 45W AC/DC LED driver featuring the constant voltage mode PWM style output design. IDLV-45 operates from $90{\sim}295$ VAC and offers models with different rated voltage ranging between 12V and 60V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -20°C~+85°C case temperature under free air convection. IDLV-45 is equipped with various function options, such as dimming methodologies, so as to provide the design flexibility for LED lighting system.

Model Encoding

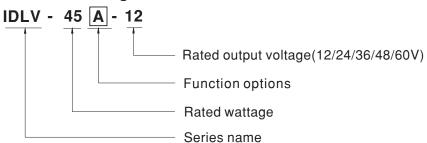


Туре	Function	Note
Blank	2 in 1 dimming (0~10VDC and 10V PWM)	
Α	2 in 1 dimming and Auxiliary DC output	In Stock

SPECIFICATION


MODEL		IDLV-45□-12	IDLV-45□-24	IDLV-45□-36	IDLV-45□-48	IDLV-45□-60	
	DC VOLTAGE	12V	24V	36V	48V	60V	
	RATED CURRENT	3.0A	1.88A	1.25A	0.94A	0.75A	
	RATED POWER	36W	45.12W	45W	45.12W	45W	
	DIMMING RANGE	0~100%					
OUTPUT	VOLTAGE TOLERANCE	±10%					
	PWM FREQUENCY (Typ.)	1KHz(±20%)					
	SETUP TIME Note.3	500ms / 230VAC 1200ms/115VAC					
	AUXILIARY DC OUTPUT Note.4	Nominal 12V(deviation 11.4~12.6)@50mA for A-Type only					
	VOLTAGE RANGE Note.2	90 ~ 295VAC (Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF>0.95/115VAC, PF>0.92/230VAC, PF>0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)					
INPUT	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VAC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION" section)					
	EFFICIENCY (Typ.)	84%	86%	88%	88%	90%	
	AC CURRENT (Typ.)	0.6A / 115VAC 0.	4A / 230VAC 0.	3A / 277VAC			
	INRUSH CURRENT(Typ.)	COLD START 30A(tv	COLD START 30A(twidth=150µs measured at 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	32 units (circuit breaker of type B) / 32 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	<0.75mA/277VAC					
	NO LOAD POWER CONSUMPTION	<0.5W for Blank-Typ	<0.5W for Blank-Type, <1.2W for A-Type				
	SHORT CIRCUIT	Shut down O/P voltage, re-power on to recovery					
PROTECTION		105 ~ 115%					
	OVER CURRENT	Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	WORKING TEMP.	Tcase=-20 ~ +85°C (Please refer to " OU1	ΓPUT LOAD vs TEMPEF	RATURE" section)		
	MAX. CASE TEMP.	Tcase=+85°C					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0~40°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL8750,CSA C22.2 NO.250.13-12; BS EN/EN/AS/NZS 61347-1 & BS EN/EN/AS/NZS 61347-2-13 independent, BS EN/EN62384,GB19510.1, GB19510.14, BIS IS15885(for IDLV-45-12,24,48 only), EAC TP TC 004 approved					
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC					
EMC	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH					
•	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≥ 60%); BS EN/EN61000-3-3, GB17743,GB17625.1, EAC TP TC 020					
	EMC IMMUNITY	Compliance to BS EN EAC TP TC 020	/EN61000-4-2,3,4,5,6	6,8,11; BS EN/EN61547,	light industry level(surge	immunity:Line-Line:1KV),	
	MTBF	386.59Khrs min.	MIL-HDBK-217F (25°	C)			
OTHERS	DIMENSION	120*75*25mm (L*W*	H)				
	PACKING	0.22Kg;54pcs/13Kg/	0.93CUFT				
NOTE	De-rating may be needed u Length of set up time is me Aux. 12V will be damaged The driver is considered as affected by the complete in The ambient temperature of To fulfill requirements of the connected to the mains.	ally mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. easured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time. with short circuit; It will not be available with dimming off or output no load condition. s a component that will be operated in combination with final equipment. Since EMC performance will be installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). The latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently or: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					
	1		- -		F	ile Name:IDLV-45-SPEC 2021-08-	

■ DIMMING OPERATION



※ Dimming principle for PWM style output


Dimming is achieved by varying the duty cycle of the output current.

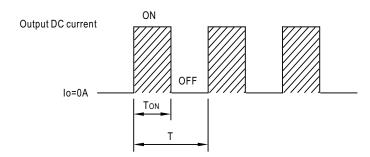


Duty cycle(%) =
$$\frac{\text{ToN}}{\text{T}}$$
 ×100%

Output PWM frequency: 1KHz(±20%)


★ 2 in 1 dimming function




"DO NOT connect "DIM- to Vo-"




"DO NOT connect "DIM- to Vo-"






Note: 1. Min. duty cycle of output current is about 8% and the output current is not defined when 0%< Iout<8%.

2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

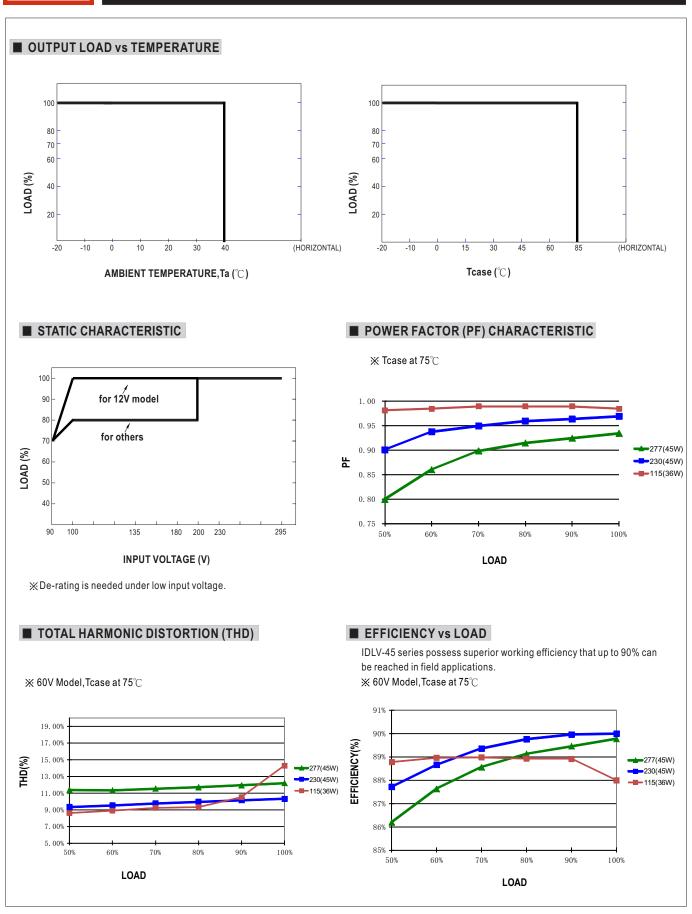


■ BLOCK DIAGRAM

fosc: 70~150KHz

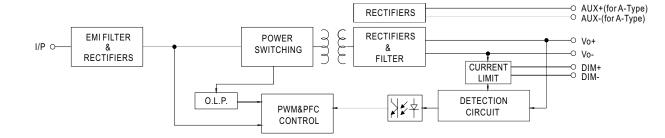

■ MECHANICAL SPECIFICATION

※ Blank-Type Case No.IDLC-45A Unit:mm

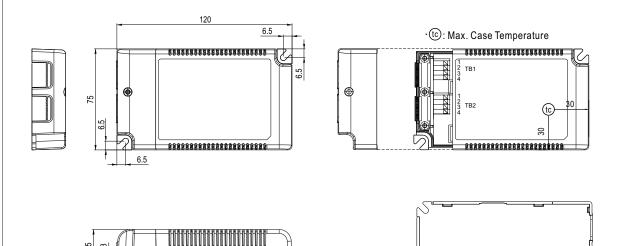


NOTE: Please use wires with a cross section of 0.75~1.5mm² for TB1 and wires with a cross section of 0.5~1.5mm² for TB2.

Terminal Pin No. Assignment(TB1)

Pin No.	Assignment
1	ACL
2	ACL
3	ACN
4	ACN

Terminal Pin No. Assignment(TB2)

Pin No.	Assignment		
1	DIM+		
2	DIM-		
3	Vo+		
4	Vo-		

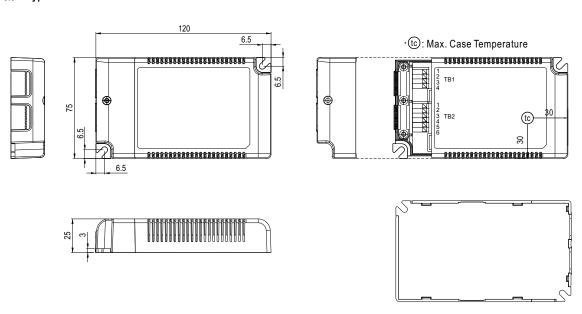

NOTE: Please use wires with a cross section of 0.75~1.5mm² for TB1 and wires with a cross section of 0.5~1.5mm² for TB2.

Terminal Pin No. Assignment(TB1)

Pin No.	Assignment
1	ACL
2	ACL
3	ACN
4	ACN

Terminal Pin No. Assignment(TB2)

reminari ii wo.7651giiii ent(182)						
Pin No.	Assignment	Pin No.	Assignment			
1	DIM+	4	Vo-			
2	DIM-	5	AUX+			
3	Vo+	6	AUX-			

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html