
## Wire-pull casings



**€** 650 °C



- · for wood and steel formwork in on-site mixed concrete as well as flush-mounting (masonry) installations
- for vertical formwork attached with adhesive, the casings must be secured with the telescopic support 9957
- End cover (plastic): fire resistance 750°C

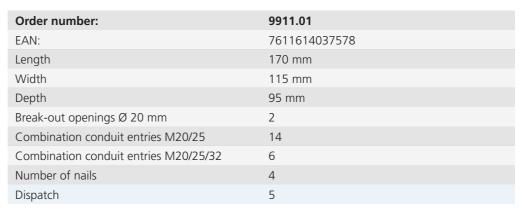



- · Quick and secure installation with pre-installed nails
- · Clean stripping where exposed concrete is required
- · High dimensional stability, no internal support required
- · Multiple conduit entry options
- · Stackable









