



Line-M-4IO-RV

Line-M-4IO-RV, Expansion modules

Code: M58E04.

- > Protocol: Modbus/RTU
- > Communications: Bus-Line
- > N° relays: 4
- > Digital inputs: 4 (230 V)
- > Mounting: DIN rail

Description

Module with 4 230V relay inputs and outputs.

The expansion modules of the Line range provide a simple way to extend the features of any version of the line-ED-Cloud or line-EDS-PS, and of the line-CVM-D32 network analyser.

They allow adding digital outputs and inputs, analogue inputs and outputs or any combination thereof, to the devices.

The modules are connected laterally and are detected automatically when the lateral connection is made, which greatly simplifies the installation and configuration of the modules.

Application

- Expansion of inputs/outputs from line-CVM-D32 or line-EDS network analysers.
- Alarms can be programmed independently based on high/low values, hysteresis, timer on/off delays, normally open or closed rest state and interlocks.
- Track the status of components in the installation by using the status of the inputs to the module with network voltages of up to 230V~
- Management of up to 4 tariffs with activation of the different inputs to the module.



Line-M-4IO-RV

Module with 4 230V relay inputs and outputs.

The expansion modules of the Line range provide a simple way to extend the features of any version of the line-ED-Cloud or line-EDS-PS, and of the line-CVM-D32 network analyser.

They allow addi

Code: M58E04.

Specifications

DC power supply

Consumption	max. 2 W
-------------	----------

Mechanical characteristics

Size (mm) width x height x depth	52,5 x 118 x 70 (mm)
Screw type	Flat, M2,5
Envelope	Self-extinguishing V0 plastic
Torque setting	≤ 0.4 Nm
Cable gauge at power supply terminals	2.5 mm ²
Cable gauge at input and output terminals	2,5 mm ²
Fastening	DIN rail (IEC 60715)
Weight (kg)	0,178

Environmental characteristics

Protection class	IP30, Front: IP40
Relative humidity (without condensation)	5 ... 95%
Storage temperature	-20 ... +70 °C
Operating temperature	-10 ... +50 °C

Varistor characteristics

Maximum voltage	275 V ~
-----------------	---------

Voltage measurement circuit

Input impedance	140 kΩ
-----------------	--------

Standards

Electrical safety, Maximum height (m)	2000
Electrical safety, Installation category	CAT III 300 V
Standards	UNE-EN 61010-1, UNE-EN 61000-6-2, UNE-EN 61000-6-4

User interface

LED	9 LED
-----	-------

Digital inputs

Input/output insulation	3,75 kV~
Quantity	4



Line-M-4IO-RV

Module with 4 230V relay inputs and outputs.

The expansion modules of the Line range provide a simple way to extend the features of any version of the line-ED-Cloud or line-EDS-PS, and of the line-CVM-D32 network analyser.

They allow addi

Code: M58E04.

Maximum short-circuit current	50 mA
Operating voltage	230 V ~
Digital relay outputs	
Quantity	4
Maximum current	6 A ~
Maximum open contact voltage	250 V ~
Electrical life (at maximum load)	5x10 ⁴ cycles
Mechanical life	5 x 10 ⁶ Cycles
Maximum switching capacity	1500 VA
Protection	
Element	Varistor
Safety relay type (class)	Class A, high frequency current filtering



Line-M-4IO-RV

Module with 4 230V relay inputs and outputs.

The expansion modules of the Line range provide a simple way to extend the features of any version of the line-ED-Cloud or line-EDS-PS, and of the line-CVM-D32 network analyser.

They allow addi

Code: M58E04.

Line-M-4IO-RV

Expansion modules, Line series

CODE	TYPE	Protocol	Analogue Inputs	Transistor output	N° relays	Digital inputs	Analog output
M58E04.	Line-M-4IO-RV	Modbus/RTU	-	-	4	4 (230 V)	-

Relay I/O expansion modules with voltage, Line system



Line-M-4IO-RV



Module with 4 230V relay inputs and outputs.

The expansion modules of the Line range provide a simple way to extend the features of any version of the line-ED-Cloud or line-EDS-PS, and of the line-CVM-D32 network analyser.

They allow addi

Code: M58E04.

Dimensions

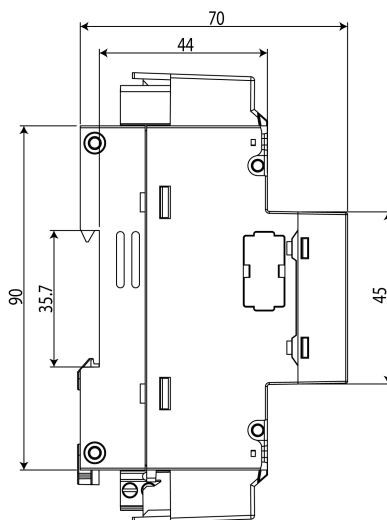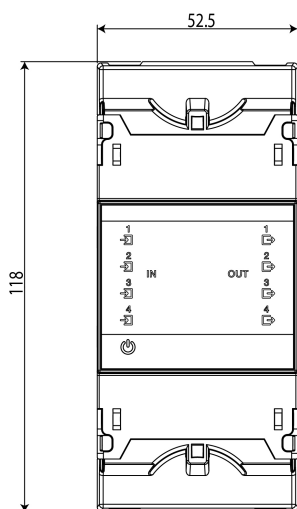

Connections

