



CEM-C12c-MID

CEM-C12c-MID, Single-phase energy meter, direct connection

Code: Q27212.

- > Protocol: Modbus/RTU
- > Módulos: 1
- > Certification: MID
- > Communications: RS-485
- > System: Single-phase
- > Measure: Direct
- > Measurement Range (V): 1 x 230
- > Measurement Range (A): 0.25 ... 5 (100) A
- > Quadrants: 4

Description

CEM-C12c is a single-phase, direct-connection electricity meter rated at up to 100 A. It measures electricity bidirectionally and features Class-1 accuracy. It also has RS-485/Modbus-RTU communications built into the same device.

Main features include:

- Small size (1 DIN rail module, 18 mm)
- Backlit LCD screen (6 digits) with rotating display system
- Electrical parameter readings

Application

To measure electricity consumption in buildings, machinery or the tertiary sector.

Control of partial consumption

To report electricity consumption to a remote system.



CEM-C12c-MID

Single-phase electrical energy meter, for assembly on DIN Rail

Code: Q27212.

Specifications

AC power supply

Nominal voltage	230 V ~
-----------------	---------

Mechanical characteristics

Size (mm) width x height x depth	18 x 90 x 72 (mm)
Screw type	Flat, PH2 (RS-485 & N) / Flat, PZ2 (L)
Envelope	PBT + 15% GF
Cable gauge at power supply terminals	≤ 1,5 mm ² (Neutral) / ≤ 22 mm ² (Measure, L)
Fastening	Attached to a DIN rail (IEC 60715)
Weight (kg)	0,1

Environmental characteristics

Protection class	IP 51 (Indoor meter)
Relative humidity (without condensation)	95 %
Storage temperature	-30 ... +70 °C
Working temperature	-25... +70 °C

Current measurement circuit

Maximum current	100 A
-----------------	-------

Voltage measurement circuit

Nominal frequency	50 Hz.
Maximum input voltage consumption	≤ 12 VA , ≤ 1 Wh

Communications

Protocol	Modbus RTU
Speed	9600 - 19200 - 38400 - 115200

User interface

LED	1000 imp / kWh
Keyboard	1 Keys
Display type	LCD
Maximum value	99999,9 kWh

Standards

Standards	IEC 62053-21, IEC 62052-11, EN 50470-1, EN 50470-3, EU Directive 2014/32/EU on Measuring instruments Annex II, Module B
-----------	---

Measurement accuracy



CEM-C12c-MID

Single-phase electrical energy meter, for assembly on DIN Rail

Code: Q27212.

Active energy measurement (kWh)

Class B (EN 50470)

CEM-C12c

Direct Single-phase energy meter with basic analyser parameters

CODE	TYPE	Quadrants	Measurement Range (V)	Measurement Range (A)	Tariff	Certification	Módules	Communications	Protocol
Q27211.	CEM-C12c	4	1 x 230	10 (100) A	1	IEC	1	RS-485	Modbus/RTU
Q27212.	CEM-C12c-MID	4	1 x 230	0.25 ... 5 (100) A	1	MID	1	RS-485	Modbus/RTU

Frequency: 50/60 Hz. Parameters: V, A, kW, kVA, kWh, cos phi




CEM-C12c-MID

Single-phase electrical energy meter, for assembly on DIN Rail

Code: Q27212.

Dimensions

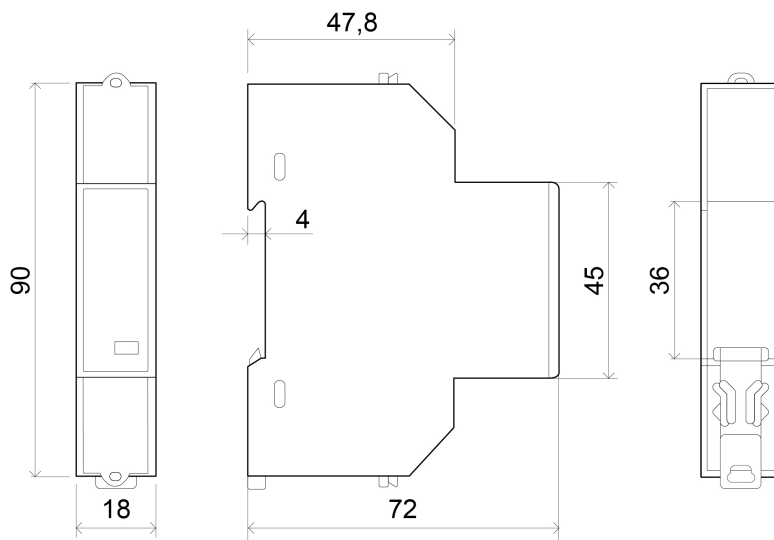

Connections

