




Przekładnik prądowy z otworem na szynę i przewód ASK 127.4

Prąd wtórny [A] / Klasa dokładności

Prąd pierwotny [A]	Moc przekładnika [VA]	5 A		1 A	
		5 A Kl. 1 Nr katalogowy	5 A Kl. 0,5 Nr katalogowy	1 A Kl. 1 Nr katalogowy	1 A Kl. 0,5 Nr katalogowy
1000	5	87540	87510	87640	87610
	10	87541	87511	87641	87611
1200	5	87542	87512	87642	87612
	10	87543	87513	87643	87613
1250	15	87544	87514	87644	87614
	10	87545	87515	87645	87615
1500	15	87546	87516	87646	87616
	30	87547	87517	87647	87617
1600	10	87548	87518	87648	87618
	15	87549	87519	87649	87619
1800	30	87550	87520	87650	87620
	10	87551	87521	87651	87621
2000	15	87552	87522	87652	87622
	30	87553	87523	87653	87623
2500	10	87554	87524	87654	87624
	15	87555	87525	87655	87625
	30	87556	87526	87656	87626
	10	87557	87527	87657	87627
	15	87558	87528	87658	87628
	30	87559	87529	87659	87629
	10	87561	87531	87661	87631
	15	87562	87532	87662	87632
	30	87563	87533	87663	87633



Szyna 1 120 x 70 mm
 Max. średnica przewodu 70 mm
 Szerokość 159 mm
 Wysokość 195,3 mm
 Głębokość 58 mm

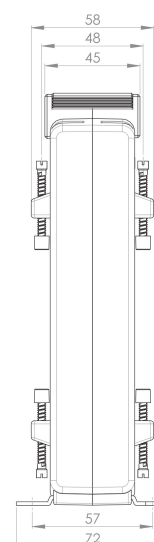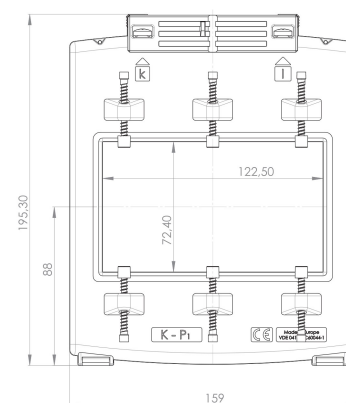

Nr katalogowy



Uchwyt do montażu na szynę DIN 35 mm

-



Ośłona do plombowania Forma C

59042