
QBLOK4160U

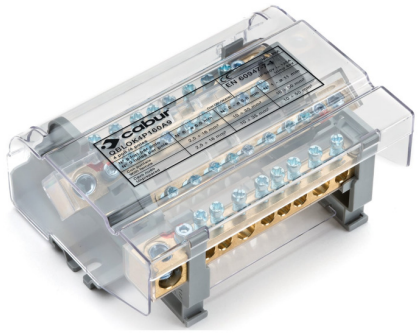

4-poles terminal block 160A with 9 holes, B.U. version

Series	QBLOK
Code	QBLOK4160U
Type	QBLOK4P160A9-U
HS code	85369010
Colour	Grey
TECHNICAL FEATURES	
Function/Type	Distribution terminal board
Number and rated cross connection	Values for each bar
A	1 x 50 mm²
B	2 x 35 mm²
C	6 x 16 mm²
D	–
Input A	
Rated cross-section	1 x 50 mm²
Connecting capacity (flexible)	10-50 mm²
Connecting capacity (rigid)	10-50 mm²
Connecting capacity (with ferrule)	35 mm² – WP 350/30
Supply bar dimension	–
Output B	
Rated cross-section	2 x 35 mm²
Connecting capacity (flexible)	10-35 mm²
Connecting capacity (rigid)	10-35 mm²
Connecting capacity (with ferrule)	25 mm² (WP 250/29)
Output C	
Rated cross-section	6 x 16 mm²
Connecting capacity (flexible)	2.5–16 mm²
Connecting capacity (rigid)	2.5–16 mm²
Connecting capacity (with ferrule)	16 mm² (WP 160/22)
Output D	
Rated cross-section	–
Connecting capacity (flexible)	–
Connecting capacity (rigid)	–
Connecting capacity (with ferrule)	–
Characteristics according to European standard IEC EN 60947-7-1	
Maximum voltage AC/DC	500 V
Maximum current (rated cross-section)	160 A
Caliber	–
Characteristics according to UL	
Maximum voltage AC/DC	–
Maximum current (rated cross-section)	–
Section (min-max)	–
Tightening torque value (UL)	–
Characteristics according to ATEX directive and IEC ex standard	
Maximum voltage AC/DC	–
Maximum current (rated cross-section)	–
Service temperature Min/Max	–
Short term current allowed (Icw) (value effective for 1s)	6 kA
Peak current (Ipk)	38 kA
Rated impulse withstand voltage / pollution degree	8kV / 3
Insulation stripping length	13 mm
Tightening torque value (nom. / max.)	2 / 2.5 Nm
Plastic material	Polyamide, polycarbonate
Width (pitch)	131 mm
Length	99 mm
Height mounted on TH35-7.5/TH35-15	54 / 62 mm
Height for panel mounting	53 mm
ACCESSORIES	
Marking	
Single marking tag	CNU/8/51 (cod. NU0851S)
Marking tag	–
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BTO (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
Mounting rail	
DIN rail according to IEC 60715/TH35	–
IEC 60715/TH35	PR/3/...
APPROVALS AND MARKINGS	

Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it

PRODUCT DESCRIPTION

QBLOK4P160A9-U 4-poles terminal block 160A with 9 holes, B.U. version

Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it