


TECHNICAL DATA SHEET

MAIN CHARACTERISTICS

SLOTTED TRUNKINGS A / S SERIES

CONSTRUCTIVE TECHNICAL CHARACTERISTICS

Material: made of technopolymer on rigid PVC base, self-extinguishing V0 degree to UL94 and high resistance to UV rays.
Standard colours: grey RAL 7030, on request White RAL 9001 or Blue RAL 5012.
Shock resistance: IK07 (up to 2 J).
Resistance to heat in continuous use up to 70°C.
Resistance to abnormal heat: up to 960°C (Glow Wire Test according to IEC 60695-2-11 standard).
Application temperature: minimum -5°C, maximum +60°C.
Insulation resistance > 100 MΩ.
Dielectric voltage 4,5 Kv/mm.
Standard length: 2 mt bars.
Made in compliance with EN 50085-1:2005 + A1:2013, EN 50085-2-3:2010, UL 1565 standards.
Approvals: IMQ, UL, RINA.
Products in compliance with RoHS II - 2011/65/EU directive + 2015/863/EU.
Products meeting the safety objectives of Low Voltage Directive 2014/35/EU (Annex I).
Made in Italy.

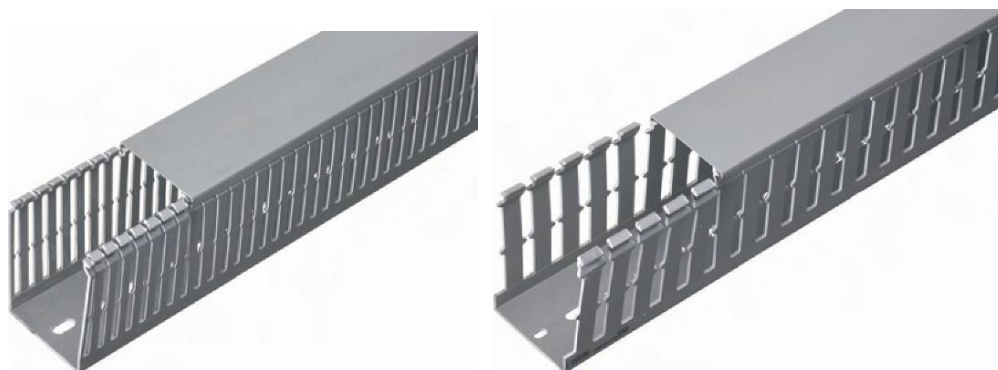

ELETTROCANALI S.p.a.
Quality Manager

Valsecchi Luca

Ver. 11.0 07/2024