


TECHNICAL DATA SHEET

MAIN CHARACTERISTICS

SLOTTED TRUNKINGS AH-SH SERIES

CONSTRUCTIVE TECHNICAL CHARACTERISTICS

Material: made of halogen free technopolymer on PC/ABS base.
Halogen free technopolymer in compliance with EN 50267-2-1, EN 50267-2-2, IEC 60754-1, IEC 60754-2 standards.
Emission limit level according to the standards: HCl, HBr, HF: <0,1.
Self-extinguishing 1,6 mm: V2 degree to UL94.
Standard colour: grey RAL 7035.
Shock resistance: IK07 (up to 2 J).
Resistance to heat in continuous use up to 90°C.
Resistance to abnormal heat: up to 960°C (Glow Wire Test according IEC 60695-2-11 standard).
Application temperature: minimum -25°C, maximum +90° C.
Insulation resistance > 100 MΩ.
Dielectric voltage 4,5 Kv/mm.
Standard length: 2 mt bars.
Made in compliance with EN 50085-1:2005 + A1:2013, EN 50085-2-3:2010, UL 1565 standards.
Products in compliance with RoHS II - 2011/65/EU directive + 2015/863/EU.
Products meeting the safety objectives of Low Voltage Directive 2014/35/EU (Annex I).
Made in Italy.

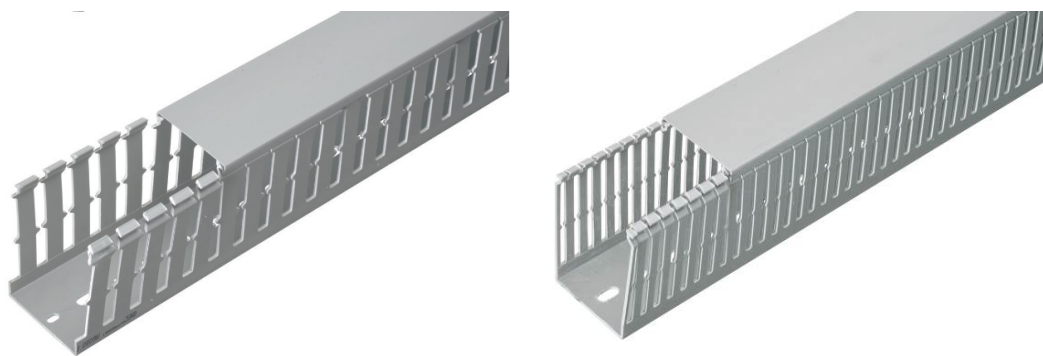

ELETTROCANALI S.p.a.
Quality Manager

Valsecchi Luca

Ver. 12.0 07/2024