


## Metal protection conduit for Ex Applications

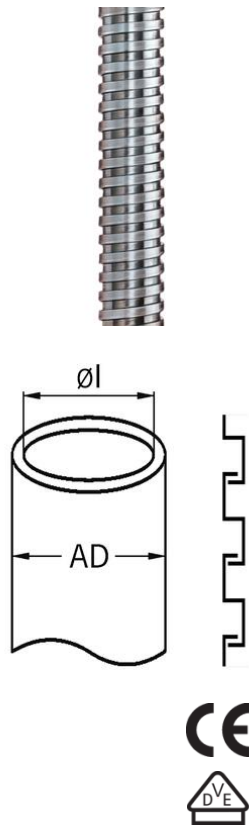

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-AS

<b>Order number:</b>	<b>1010.111.023</b>
E-No:	125450599
EAN:	7611614015088
Material	zinc coated steel
Properties	Highly flexible, stretch resistant, lateral crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	27 mm
Inner diameter	23 mm
Bending radius static	48 mm
Bending radius dynamic	120 mm
Bushing	5031.027.021
Dispatch	50