


Protective metal conduit non liquid-tight

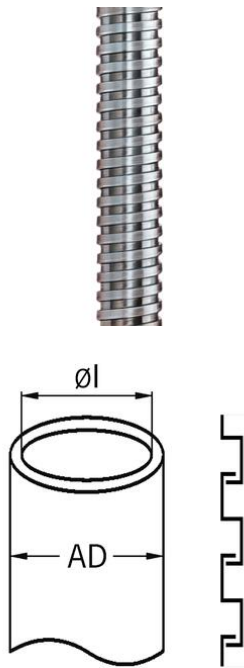

Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-VA

| | |
|------------------------|--|
| Order number: | 1010.801.014 |
| E-No: | 125486299 |
| EAN: | 7611614202204 |
| Material | Stainless steel A2 |
| Properties | Highly flexible, stretch resistant, lateral crush resistant, high temperature stability |
| Application | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, sensor technology |
| Protection class | IP 40 |
| Operation temperature | -200°C / +600°C |
| Outer diameter | 17 mm |
| Inner diameter | 14 mm |
| Bending radius static | 30 mm |
| Bending radius dynamic | 75 mm |
| Bushing | 5031.027.011 |
| Dispatch | 50 |