


## Protective metal conduit non liquid-tight

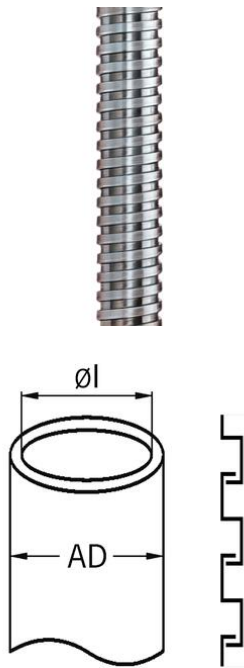

### Protective metal conduit non liquid-tight

- Protective metal conduit non liquid-tight
- SPR-VA

|                        |  |
|------------------------|--|
| <b>Order number:</b>   | <b>1010.801.023</b>  |
| E-No:                  | 125486599  |
| EAN:                   | 7611614202242  |
| Material               | Stainless steel A2   |
| Properties             | Highly flexible, stretch resistant, lateral crush resistant, high temperature stability                                      |
| Application            | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, sensor technology |
| Protection class       | IP 40  |
| Operation temperature  | -200°C / +600°C  |
| Outer diameter         | 27 mm  |
| Inner diameter         | 23 mm  |
| Bending radius static  | 48 mm  |
| Bending radius dynamic | 120 mm   |
| Bushing                | 5031.027.021   |
| Dispatch               | 50   |