


Protective metal conduit liquid-tight

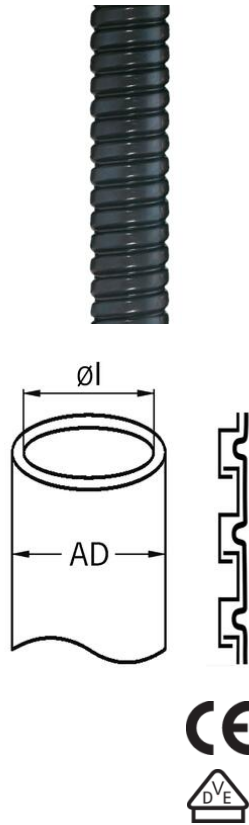

Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PVC-AS
- Black

| | |
|------------------------|--|
| Order number: | 2010.112.015 |
| E-No: | 125481300 |
| EAN: | 7611614158570 |
| Material | zinc coated steel |
| Sheathing | PVC |
| Properties | Weatherproof, watertight, widely resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch and crush resistant |
| Application | Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations |
| Tested acc. to | EN / IEC 61386-23 |
| Protection class | IP 68 |
| Operation temperature | -25°C / +90°C / ^ +100°C |
| Outer diameter | 19 mm |
| Inner diameter | 15 mm |
| Bending radius static | 50 mm |
| Bending radius dynamic | 120 mm |
| Bushing | 5031.028.013 |
| Dispatch | 50 |