


## Protective metal conduit liquid-tight

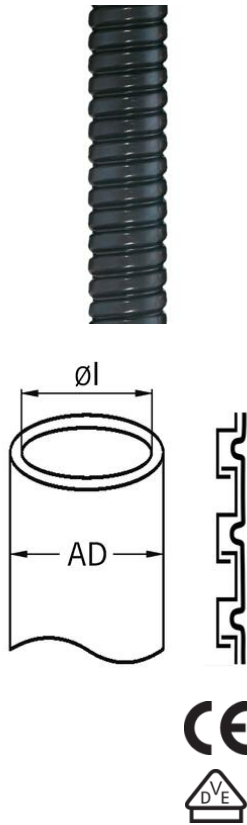

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PVC-AS
- Black

<b>Order number:</b>	<b>2010.112.049</b>
E-No:	125481800
EAN:	7611614158624
Material	zinc coated steel
Sheathing	PVC
Properties	Weatherproof, watertight, widely resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch and crush resistant
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	56 mm
Inner diameter	49 mm
Bending radius static	130 mm
Bending radius dynamic	325 mm
Bushing	5031.028.048
Dispatch	25