


## Synthetic protective conduit liquid-tight

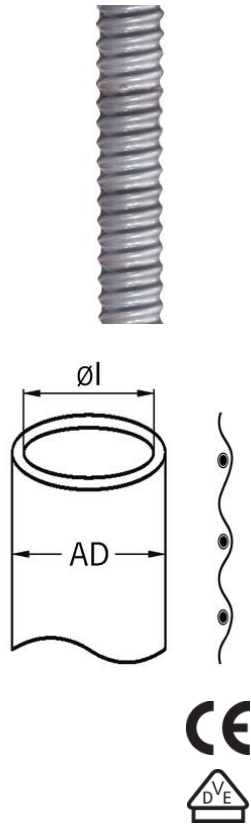

### Synthetic protective conduit liquid-tight

- Synthetic protective conduit liquid-tight
- AIRflex®-KUW-PVC-AS
- Grey

<b>Order number:</b>	<b>2030.101.010</b>
E-No:	125280129
EAN:	7611614015743
Material	Soft PVC jacket, helix of PVC sheathed spring steel wire
Properties	Extremely flexible, highly expansible and upsettable, airtight and liquid-proof, widely resistant to oil and acids, free of silicone and cadmium, inside protection against corrosion due to PVC-sheathed spring steel wire
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	14 mm
Inner diameter	10 mm
Bending radius static	10 mm
Bending radius dynamic	25 mm
Bushing	5020.030.009
Dispatch	50