


Protective metal conduit liquid-tight

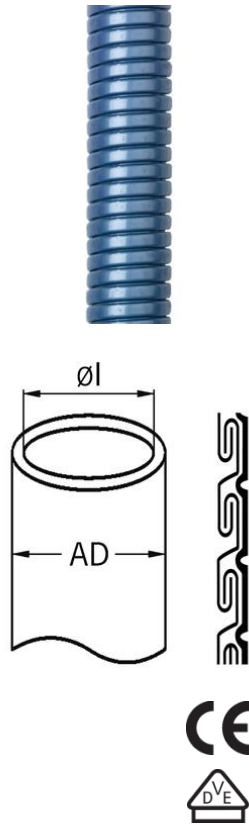

Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- FLEXAgraff®-PU-AS
- Metallic blue

Order number:	2130.101.049
EAN:	7611614238623
Material	Steel galvanized, double-overlapped
Sheathing	Polyurethane
Properties	High tensile and twisting strength thanks to double-overlapped profile (Agraff), high EMC shielding factor, outstanding performance at low temperatures, no untwisting of the conduit, resistant to oil, petrol and grease, very flexible, flameresistant V2 ac
Application	Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +100°C / ^ +130°C
Outer diameter	56 mm
Inner diameter	49 mm
Bending radius static	240 mm
Bending radius dynamic	600 mm
Bushing	5031.028.048
Dispatch	25

Colour black on request