


## Protective metal conduit liquid-tight

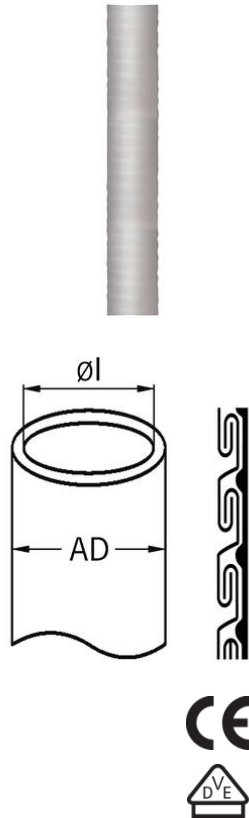

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- FLEXAgraff®-SI-ASF
- Grey

<b>Order number:</b>	<b>2140.801.048</b>
E-No:	125690809
EAN:	7611614117652
Material	Steel galvanized, double-overlapped
Sheathing	Silicone
Properties	High tensile strength and torsional safety due to double overlapped profile, silicone jacket provides good electrical insulation, very good resistance to ozone, ultra-violet radiation and atmospheric influences, no untwisting of the conduit, oil-, petrol-
Application	Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +180°C
Outer diameter	56 mm
Inner diameter	47 mm
Bending radius static	210 mm
Bending radius dynamic	525 mm
Bushing	5031.037.048
Dispatch	25

For applications exceeding +80°C PTFE-sealing required!