


## Protective metal conduit liquid-tight

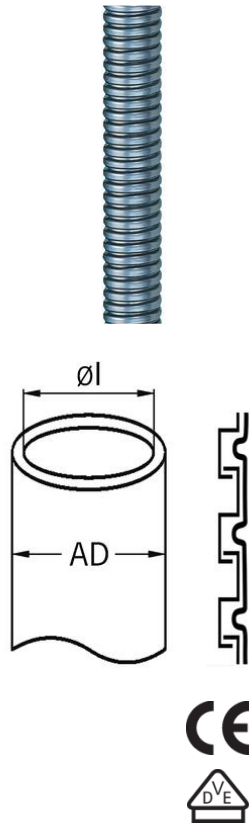

### Protective metal conduit liquid-tight

- Protective metal conduit liquid-tight
- SPR-PU-AS
- Metallic blue

<b>Order number:</b>	<b>2210.711.049</b>
E-No:	125491802
EAN:	7611614015613
Material	zinc coated steel
Sheathing	Polyurethane
Properties	Oil-, petrol- and grease-resistant, widely resistant to solvents and acids, halogen-free, free of silicone and cadmium, highly tenacity and abrasion resistance, outstanding qualities at low temperature, very flexible, microbe-resistan
Application	Machine and plant constructions, vehicle construction, rail vehicles outside applications, shipbuilding, automation, electrical installations
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +100°C / ^ +130°C
Outer diameter	56 mm
Inner diameter	49 mm
Bending radius static	130 mm
Bending radius dynamic	325 mm
Bushing	5031.028.048
Dispatch	25

#### Available on request:

- Sheathing in polyamide