


## Metal protective EMC conduits liquid-tight

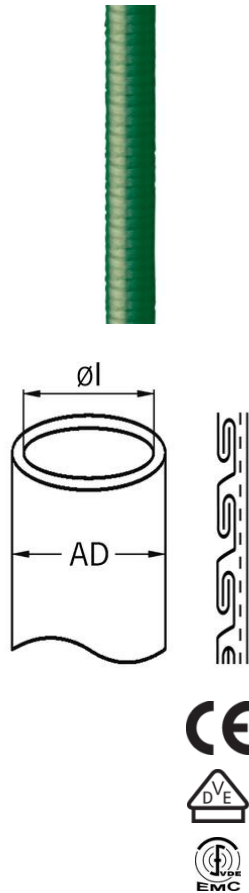

### Metal protective EMC conduits liquid-tight

- Metal protective EMC conduits liquid-tight
- FLEXAgraff®-CU-PU-AS
- Green

<b>Order number:</b>	<b>2540.707.038</b>
E-No:	125692704
EAN:	7611614158235
Material	Cold strip DC03 acc. to EN 10139 galvanized, double-overlapped, tinned copper wire braiding
Sheathing	Polyurethane
Properties	High torsional- and tensile strength, liquid-proof, absolutely oil-, petrol- and grease resistant, widely resistant to solvents and acids, free of halogen, silicone and cadmium
Application	Machine and plant constructions, vehicle construction, shipbuilding, railway, automation, electrical installations, EMC applications
Screening attenuation	Shielding factor up to 30 MHz. Up to 80 dB according to EN 50289-1-6
Tested acc. to	EN / IEC 61386-23
Protection class	IP 68
Operation temperature	-50°C / +100°C / ^ +130°C
Outer diameter	45 mm
Inner diameter	38 mm
Bending radius static	150 mm
Bending radius dynamic	375 mm
Bushing	5031.028.036
Dispatch	10

For EMC applications brass thrust collar necessary!