


## Metal protective EMC conduit non liquid-tight

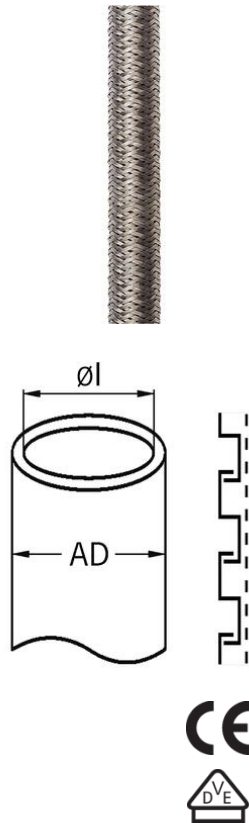

### Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- SPR-EDU-AS

<b>Order number:</b>	<b>4010.111.007</b>
EAN:	7611614015156
Material	zinc coated steel
Sheathing	Galvanized steel wire
Properties	Provides high mechanical protection due to high tensile, torsional and bending strength, highly flexible, no untwisting of the conduit
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications
Screening attenuation	10 KHz = 30 dB
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	10 mm
Inner diameter	7 mm
Bending radius static	16 mm
Bending radius dynamic	40 mm
Bushing	5031.028.007
Dispatch	50

For EMC applications brass thrust collar necessary!