


## Metal protective EMC conduit non liquid-tight

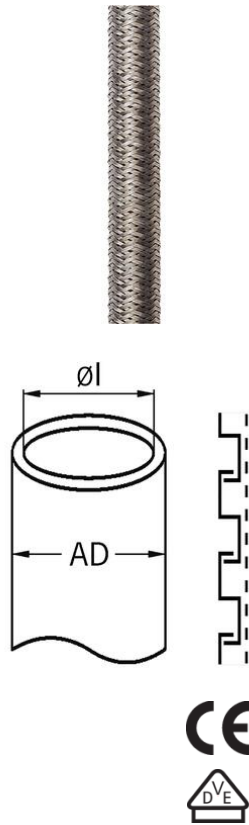

### Metal protective EMC conduit non liquid-tight

- Metal protective EMC conduit non liquid-tight
- SPR-EDU-AS

<b>Order number:</b>	<b>4010.111.013</b>
E-No:	125481299
EAN:	7611614015170
Material	zinc coated steel
Sheathing	Galvanized steel wire
Properties	Provides high mechanical protection due to high tensile, torsional and bending strength, highly flexible, no untwisting of the conduit
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications
Screening attenuation	10 KHz = 30 dB
Tested acc. to	EN / IEC 61386-23
Protection class	IP 40
Operation temperature	-50°C / +250°C
Outer diameter	17 mm
Inner diameter	13 mm
Bending radius static	30 mm
Bending radius dynamic	75 mm
Bushing	5031.028.011
Dispatch	50

For EMC applications brass thrust collar necessary!