


## Metal protective EMC conduits liquid-tight

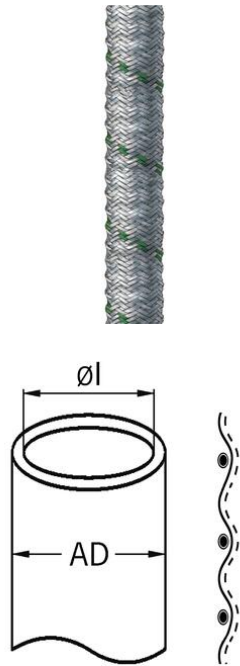

### Synthetic protective EMC conduit liquid-tight

- Synthetic protective EMC conduit liquid-tight
- AIRflex®-KUW-EDU

<b>Order number:</b>	<b>4230.101.037</b>
E-No:	125532799
EAN:	7611614154251
Material	Soft PVC jacket, helix of PVC sheathed spring steel wire
Sheathing	Galvanized steel wire
Properties	Very flexible, airtight and liquid-proof, resistant to stretch and twist, widely resistant to oil and acids, free of silicone and cadmium, high internal resistance to compression, protection against hot swarf, good shielding properties, inside protection
Application	Machine and plant constructions, vehicle construction, shipbuilding, automation, electrical installations, EMC applications
Screening attenuation	48dB at 130MHz, mean value 20dB
Protection class	IP 68
Operation temperature	-25°C / +90°C / ^ +100°C
Outer diameter	45 mm
Inner diameter	37 mm
Bending radius static	48 mm
Bending radius dynamic	120 mm
Bushing	5031.035.036
Dispatch	25

For EMC applications brass thrust collar necessary!