

Part number

CX 01 YPEF



Female modular insert, Mixo series, crimp connection, 1 PE pole, 2 modules, PE module for earth termination




| Product description | | Material properties | |
|---|--|-------------------------------------|------------------------|
| Product type | Modular insert | Main material | Polycarbonate |
| Series | Mixo | Colour | RAL 7032 grey |
| Connection type | Crimp connection | RoHs conformity | Compliant |
| Gender | Female | China RoHs - EFUP | E |
| N. of poles | 1 PE pole | REACH SVHC substances | No |
| Size | 2 modules | Approvals / Standards | |
| Specification | PE module for earth termination | Certifications | CSA, CQC, DNV, BV, EAC |
| Technical data | | UL | ECBT2 |
| Current | 200 A | cUL | ECBT8 |
| Rated voltage according to UL/CSA | 600 V | General ordering information | |
| IP degree of protection | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | EAN13 code | 8015747168076 |
| Further technical details | | eCl@ss 8.1 | 27440205 |
| Insulation resistance | ≥ 10 GΩ | ETIM 7.0 | EC000438 |
| Contact resistance | ≤ 0,2 mΩ | Packaging Information | |
| Weight | 38,00 g | Packaging length | 112,00 mm |
| Operating temperature range (min, max) | -40 °C ... +125 °C | Packaging height | 95,00 mm |
| UL 94 flammability rating | V-0 | Packaging width | 117,00 mm |
| | | Packaging weight | 0,23 kg |
| | | Packaging volume | 1,24 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 5 Pcs |
| | | Packaging EAN code | 8015747168403 |
| | | Sub-packaging weight | 0,05 kg |
| | | Sub-packaging description | Plastic bag |
| | | Sub-packaging quantity | 1 Pcs |
| | | Sub-packaging EAN barcode | 8015747168410 |

Part number

CX 01 YPEF



Catalogue drawings

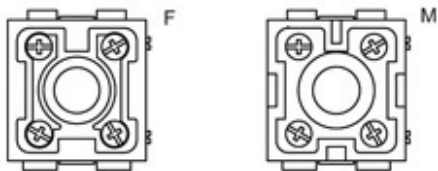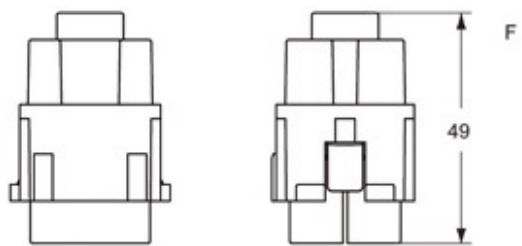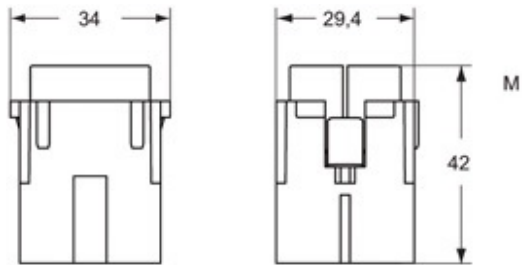

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
