

Part number

CX 02 BM



Male modular insert, Mixo Bus series, coaxial, 2 modules, 50 V 0,8 kV 3, seat for 2 shielded connectors

Product description

Product type	Modular insert
Series	06ABS
Connection type	Coaxial
Gender	Male
Size	2 modules
Specification	Seat for 2 shielded connectors

Technical data

Voltage	50 V
Rated impulse withstand voltage	0,8 kV
Pollution degree	3
Rated voltage according to UL/CSA	50 V
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Characteristics according to EN 61984	50V 0.8kV 3
Insulation resistance	≥ 10 GΩ
Weight	12,60 g
Operating temperature range (min, max)	-40 °C ... +125 °C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate
Colour	RAL 7032 grey
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

Approvals / Standards

Reference standard	EN 61984:2009-06
Certifications	CSA, CQC, DNV, EAC
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747095938
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information

Packaging length	350,00 mm
Packaging height	105,00 mm
Packaging width	145,00 mm
Packaging weight	1,06 kg
Packaging volume	5,33 dm ³
Packaging description	Carton box
Packaging quantity	60 Pcs
Packaging EAN code	8015747221054
Sub-packaging length	35,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	0,09 kg
Sub-packaging volume	0,22 dm ³
Sub-packaging description	Carton tray
Sub-packaging quantity	5 Pcs
Sub-packaging EAN barcode	8015747095945


Part number

CX 02 BM




Catalogue drawings

CX 02 BM

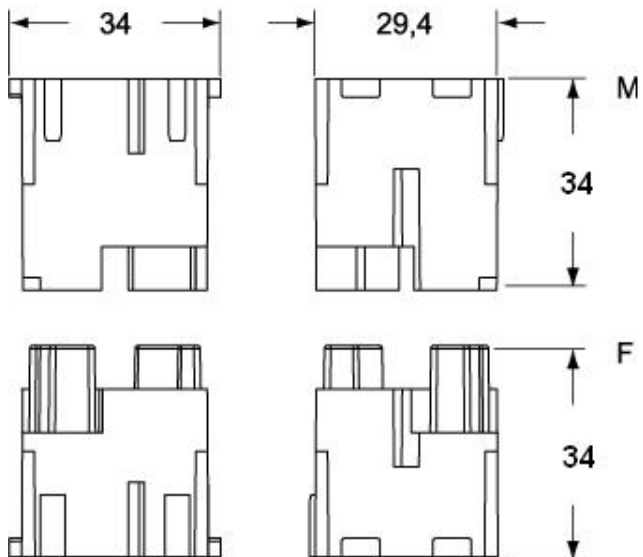

CX 02 BF

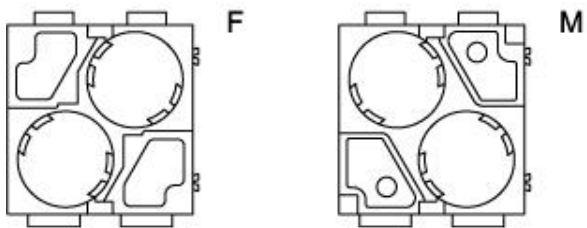

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.