

Part number

CX 03 MP



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 3 seats for tube diameter 3 - 4 - 6 mm

Product description

Product type	Modular insert
Series	Mixo
Connection type	Pneumatic
N. of poles	3 poles
Size	1 module
Specification	With 3 seats for tube diameter 3 - 4 - 6 mm

Further technical details

Mating cycles	≥ 500 / ≥ 10.000 with HNM frames and enclosures
Insulation resistance	≥ 10 GΩ
Weight	6,50 g
Operating temperature range (min, max)	-40°C...+80°C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate (PC)
Colour	RAL 5015 blue
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

General ordering information

EAN13 code	8015747182140
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information


Packaging length	180,00 mm
Packaging height	120,00 mm
Packaging width	155,00 mm
Packaging weight	0,58 kg
Packaging volume	3,35 dm ³
Packaging description	Carton box
Packaging quantity	60 Pcs
Packaging EAN code	8015747182157
Sub-packaging length	35,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	0,10 kg
Sub-packaging volume	0,22 dm ³
Sub-packaging description	Carton tray
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747182164

Part number

CX 03 MP



Catalogue drawings

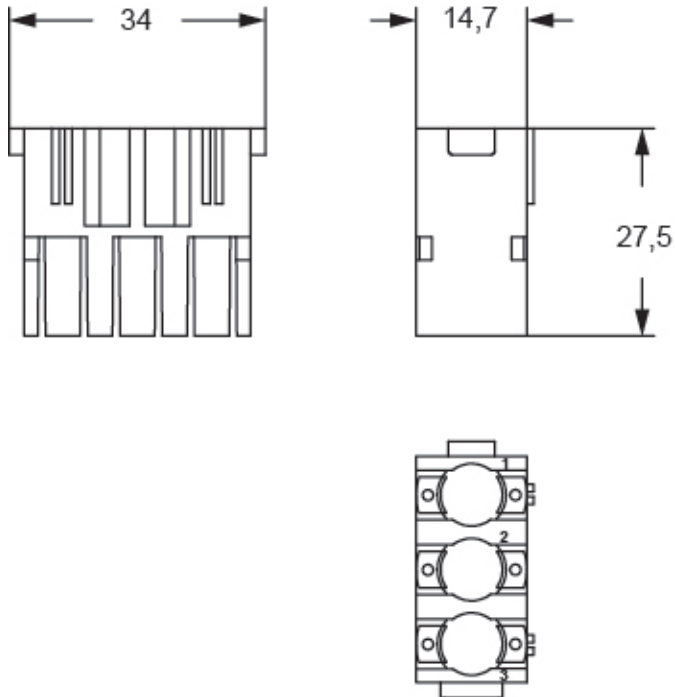

Notes

Warnings:

1) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

Use of units for pneumatic contacts

- pneumatic contacts for pressure values up to 10 bar, for use with clean and dry compressed air
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 3 - 4 and 6 mm, and possible replacement of tubes with assembled units. Tube with

• ID inner Ø (push-over attachment of tubes over barbed straight contacts):

CX xx MPF/M, CX xx MPV

• OD outer Ø (push-in attachment of tubes to the quick-fitting contacts):

CX xx MPQF/M, CX xx MPAV, CX xx MPAF/M, CX xx MPQV

without notice.

Dimensions shown in mm are not binding and may be changed