

Part number

CX 04 SCF



Female modular insert, Mixo Data series, fibre optic, 4 poles, 1 module, with ceramic sleeve

Product description

Product type	Modular insert
Series	Mixo Data
Connection type	Fibre optic
Gender	Female
N. of poles	4 seats for fibre optic SC contacts
Size	1 module
Specification	With ceramic sleeve SC fibre optic connector

Technical data

IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure
--------------------------------	--

Further technical details

Mating cycles	≥ 500
Insulation resistance	≥ 10 GΩ
Weight	8,50 g
Operating temperature range (min, max)	-40°C ... +85°C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate (PC)
Colour	RAL 7032 grey
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

Approvals / Standards

Certifications	DNV, BV
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747190169
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information


Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747190831

Part number

CX 04 SCF



Catalogue drawings

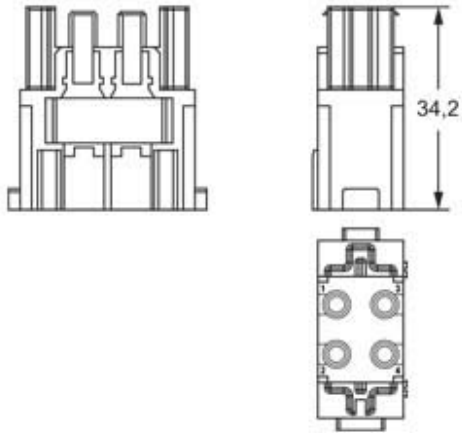

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
