

Part number

RQM 05



Male insert, RQ series, crimp connection, 5 poles + PE, 16 A 230/400 V 4 kV 3, size "21.21", HNM - High Number of Matings series

Product description	
Product type	Insert
Series	CQ
Connection type	Crimp connection
Gender	Male
N. of poles	5 poles +
Size	Size "21.21"
Specification	HNM - High Number of Matings version
Technical data	
Current	16 A
Voltage	230 - 400 V
Rated impulse withstand voltage	4 kV
Pollution degree	3
Rated voltage according to UL/CSA	600 V
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure
Further technical details	
Characteristics according to EN 61984	16A 230/400V 4kV 3; 16A 320/500V 4kV 2
Mating cycles	≥ 5000
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 1 mΩ
Weight	15,80 g
Operating temperature range (min, max)	-40 °C ... +125 °C
UL 94 flammability rating	V-0
Tightening torque for PE connection	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)


Material properties	
Main material	Polycarbonate (PC)
Other materials	Gasket: NBR
Colour	RAL 7032 grey
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
General ordering information	
EAN13 code	8015747174558
eCl@ss 8.1	27440205
ETIM 7.0	EC000438
Packaging Information	
Packaging length	290,00 mm
Packaging height	185,00 mm
Packaging width	280,00 mm
Packaging weight	3,16 kg
Packaging volume	15,02 dm ³
Packaging description	Carton box
Packaging quantity	200 Pcs
Packaging EAN code	8015747174619
Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747140126

Part number

RQM 05




Catalogue drawings

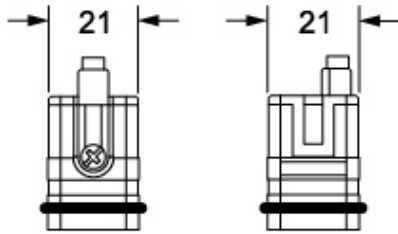

Derating curves

RQ 05 poles connector inserts
Maximum current load derating diagram

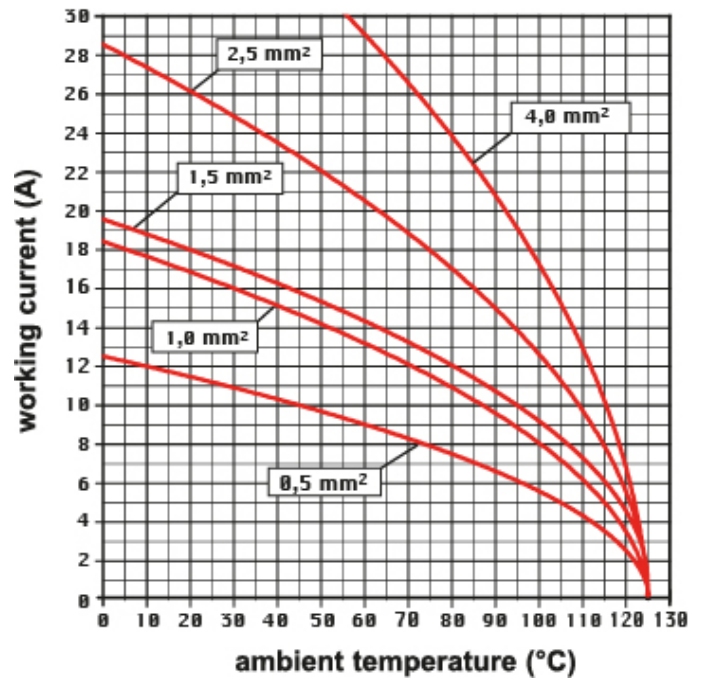

Notes

Dimensions shown in mm are not binding and may be changed without notice.