



## Primary lithium battery LS 26500

3.6 V Primary lithium-thionyl chloride (Li-SOCl<sub>2</sub>)  
High energy density  
C-size bobbin cell



### Benefits

- High voltage response, stable during most of the lifetime of the application
- Wide operating temperature range (-60°C/+85°C)
- Low self-discharge rate (less than 1 % after 1 year of storage at +20°C)
- Easy integration into compact systems
- Superior resistance to atmospheric corrosion

### Key features

- Stainless steel container and end caps (low magnetic signature)
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Underwriters Laboratories (UL) Component Recognition
- Compliant with IEC 60086-4 safety standard and IEC 60079-11 intrinsic safety standard
- Restricted for transport (Class 9)

### Main applications

- Utility metering
- Automatic meter readers
- Buoys
- Measuring equipment
- Industrial applications
- Professional electronics

### Optional upon request

- Low magnetic version

### Cell size references

C

### Electrical characteristics

*(typical values relative to cells stored for one year or less at +30°C max.)*

Nominal capacity 7.7 Ah

*(at 4 mA +20°C 2.0 V cut-off. The capacity restored by the cell varies according to current drain, temperature and cut-off)*

Open circuit voltage [at +20°C] 3.67 V

Nominal voltage [at 0.5 mA +20°C] 3.6 V

Nominal energy 27.72 Wh

Pulse capability: Typically up to 300 mA (300 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0 V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult Saft)

Maximum recommended continuous current 150 mA  
*(Higher currents possible, consult Saft)*

Storage (recommended) +30°C (+86°F) max  
*(for more severe conditions, consult Saft)*

Operating temperature range -60°C/+85°C  
*(Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult Saft)*

### Physical characteristics

Diameter (max) 26.0 mm (1.02 in)

Height (max) 49.1 mm or 50.4 mm  
(1.93 in or 1.98 in)  
depending on finish type

Typical weight 48 g (1.7 oz)

Li metal content approx. 2.0 g

Available termination suffix

CNR  
3 PF, 3 PF RP  
CNA (AX)  
FL

radial tabs  
radial pins  
axial leads  
flying leads... etc.


May 2010




**ZAPRASZAMY NA NASZE STRONY INTERNETOWE:**

ul. Dąbrowskiego 441, 60-451 Poznań, tel. (061) 848 88 71, faks (061) 848 82 76, e-mail: info@astat.com.pl  
Konto bankowe: BOŚ S.A. O/Poznań nr 69 1540 1056 2001 8310 1156 0002 Regon: 630033055 NIP: 781-00-23-663

### LS 26500

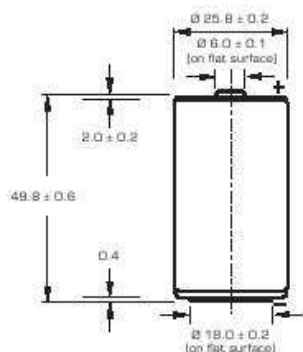

Finished version with protruding positive end cap

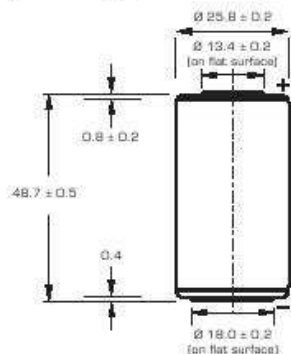

Finished version with flat positive end cap

Dimensions in mm.

#### Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated.

#### Warning




- Fire, explosion and severe burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the cell (use tabbed cell versions instead).

#### Saft

##### Specialty Battery Group

12, rue Sadi Carnot  
93170 Bagnolet - France  
Tel.: +33 (0)1 49 93 19 18  
Fax: +33 (0)1 49 93 19 69

[www.saftbatteries.com](http://www.saftbatteries.com)

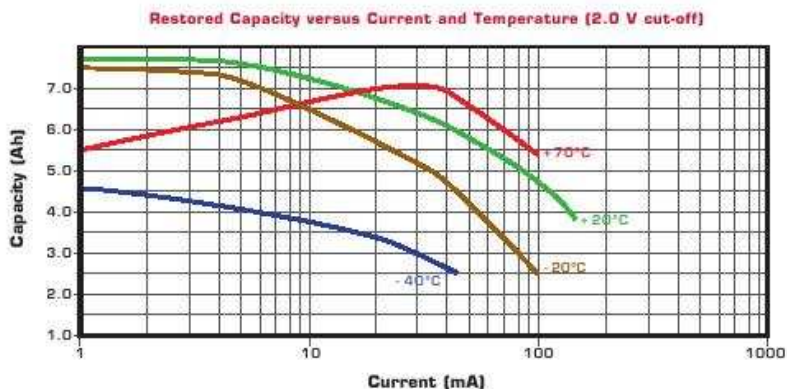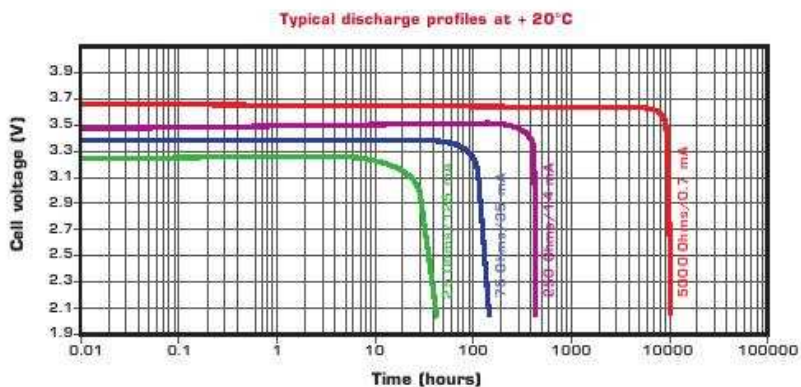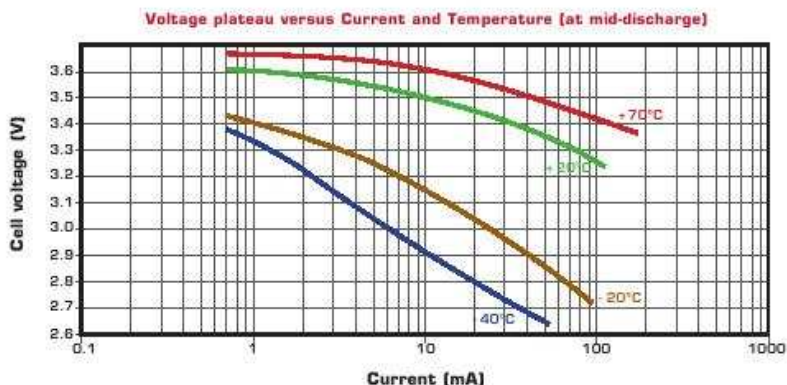

Doc. N° 31016-2-0510

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

For more details on primary lithium technologies please refer to Primary Lithium Batteries Selector Guide Doc N° 31048-2.

Photo credit: Saft

Société anonyme au capital de 31 944 000 €  
RCS Bobigny B 383 703 873

Produced by Arthur Associates Limited.



### ZAPRASZAMY NA NASZE STRONY INTERNETOWE:

ul. Dąbrowskiego 441, 60-451 Poznań, tel. (061) 848 88 71, faks (061) 848 82 76, e-mail: info@astat.com.pl  
Konto bankowe: BOŚ S.A. O/Poznań nr 69 1540 1056 2001 8310 1156 0002 Regon: 630033055 NIP: 781-00-23-663