




Part number: I08000018 - Model: SI8-C1 PNP NC H





| TECHNICAL CHARACTERISTICS | |
|----------------------------------|------------------------|
| Power supply: | Direct current |
| Working voltage: | 6 ÷ 30 Vdc |
| Switching distance (mm): | 1.5 |
| Output logic: | PNP |
| Function: | NC |
| Hysteresis (%Sn): | < 10% |
| Max switching frequency: | 2000 Hz |
| Repeatability (%Sn): | < = 3 |
| Max output current: | 200 mA |
| Absorption: | < 12 mA @ 24Vdc |
| Voltage drop: | < 1.8 V |
| Short circuit protection: | Present |
| Led indicator: | Present |
| Temperature limits: | -25 ÷ +70 °C |
| IP rating: | Depending on connector |
| Housing material: | Stainless steel |
| Mechanical characteristics: | M8x1 |
| Connection type: | H plug |
| Weigth: | 40 g |

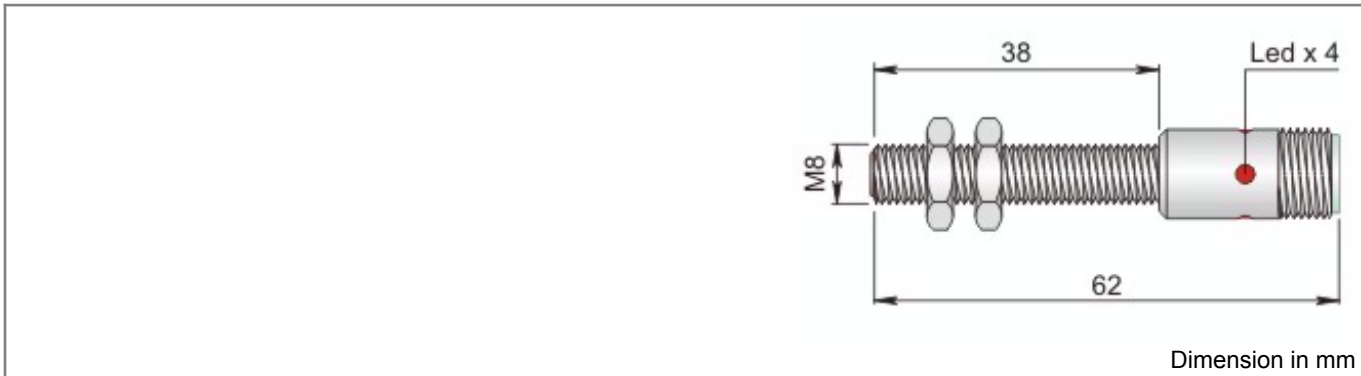

Part number: I08000018 - Model: SI8-C1 PNP NC H

WIRING DIAGRAM

CONNECTION WITH H PLUG

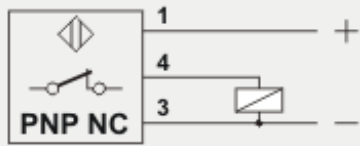


VIEW OF MALE CONNECTOR

- 1 = Brown / +
- 3 = Blue / -
- 4 = Black / output NC


INSTRUCTIONS FOR CORRECT INSTALLATION

INSTRUCTIONS FOR CORRECT INSTALLATION

EMBEDDABLE

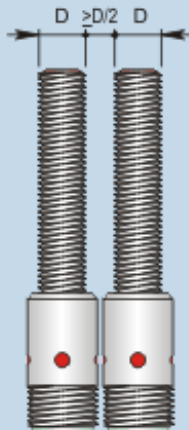

Side by side mounting

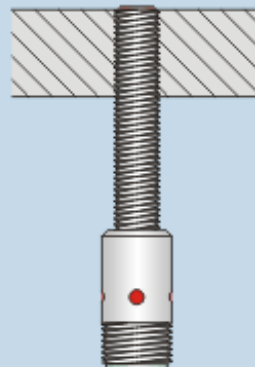

Flush mounting