




**Part number: I08000030 - Model: SI8-C1 PNP NO H1**





<b>TECHNICAL CHARACTERISTICS</b>	
Power supply:	Direct current
Working voltage:	6 ÷ 30 Vdc
Switching distance (mm):	1.5
Output logic:	PNP
Function:	NO
Hysteresis (%Sn):	< 10%
Max switching frequency:	2000 Hz
Repeatability (%Sn):	< = 3
Max output current:	200 mA
Absorption:	< 12 mA @ 24Vdc
Voltage drop:	< 1.8 V
Short circuit protection:	Present
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	Depending on connector
Housing material:	Stainless steel
Mechanical characteristics:	M8x1
Connection type:	H1 plug
Weigth:	30 g

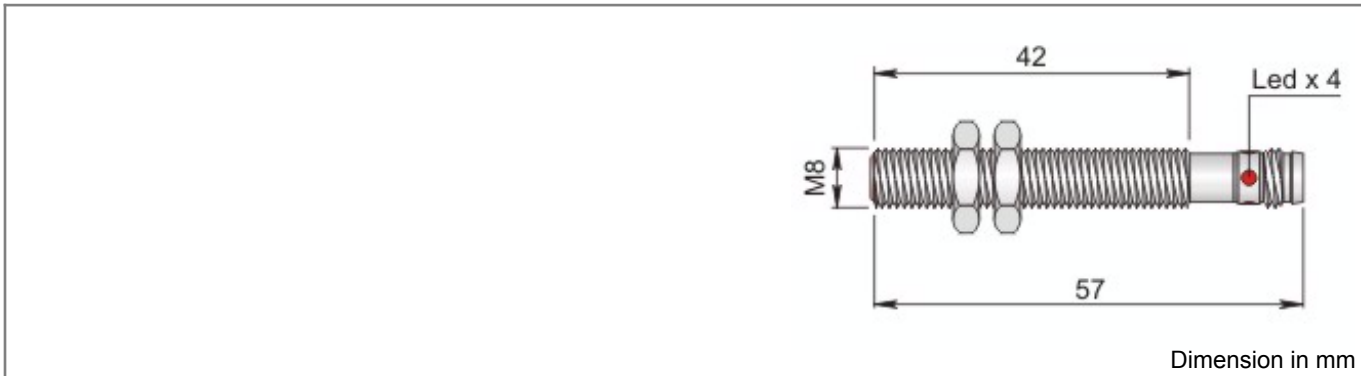

Part number: I08000030 - Model: SI8-C1 PNP NO H1

**WIRING DIAGRAM**

**CONNECTION WITH H1 PLUG**

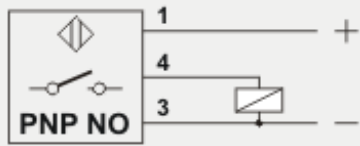

VIEW OF MALE CONNECTOR

- 1 = Brown / +
- 3 = Blue / -
- 4 = Black / output NC


**INSTRUCTIONS FOR CORRECT INSTALLATION**

**INSTRUCTIONS FOR CORRECT INSTALLATION**

**EMBEDDABLE**



Side by side mounting



Flush mounting