


**Part number: I12000005 - Model: SI12-A2 NO H**





<b>TECHNICAL CHARACTERISTICS</b>	
Power supply:	Alternating current
Working voltage:	20 ÷ 250 Vac
Switching distance (mm):	2
Function:	NO
Hysteresis (%Sn):	< 10%
Max switching frequency:	12 Hz
Repeatability (%Sn):	< = 3
Max output current:	300 mA
Min output current:	5 mA
Max peak current for 20msec:	1.5 A
Residual current:	< 1 mA
Voltage drop:	< 6 V
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	Depending on connector
Housing material:	Nickelled brass
Mechanical characteristics:	M12x1
Connection type:	H plug
Weighth:	40 g

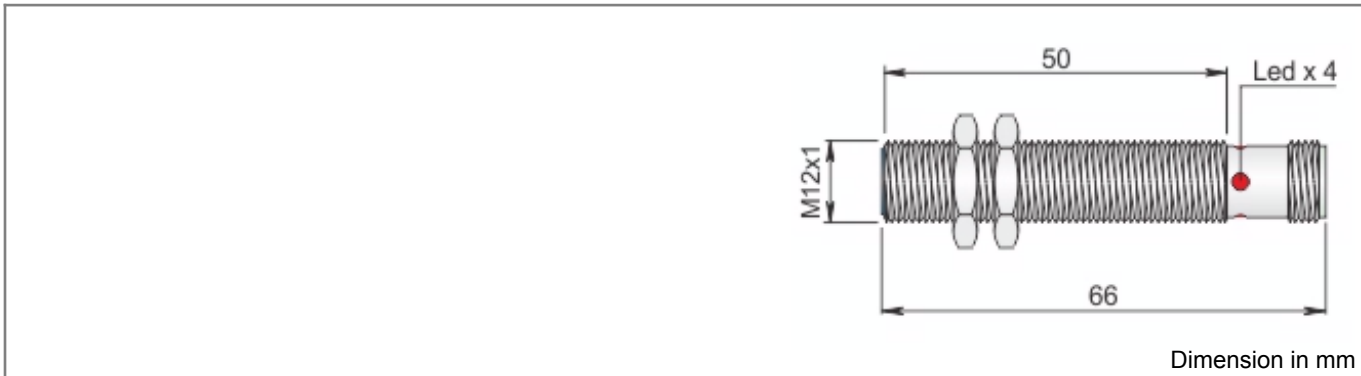

Part number: I12000005 - Model: SI12-A2 NO H

## WIRING DIAGRAM

### CONNECTION WITH H PLUG

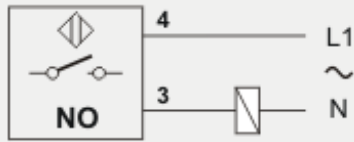

#### VIEW OF MALE CONNECTOR

3 = Blue \*


4 = Black \*

(\*) The wire colour are referred to the connector with cable only


## INSTRUCTIONS FOR CORRECT INSTALLATION

### INSTRUCTIONS FOR CORRECT INSTALLATION

#### EMBEDDABLE

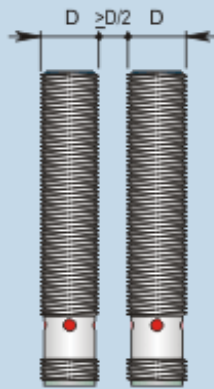

Side by side mounting



Flush mounting