




**Part number: I12000074 - Model: SI12-C2 PNP NO+NC K**

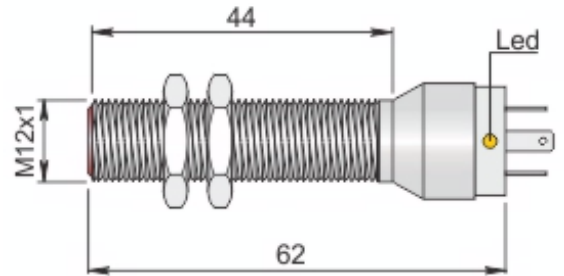

Dimension in mm

**TECHNICAL CHARACTERISTICS**



Power supply:	Direct current
Working voltage:	10 ÷ 30 Vdc
Switching distance (mm):	2
Output logic:	PNP
Function:	NO+NC
Hysteresis (%Sn):	< 10%
Max switching frequency:	1000 Hz
Repeatability (%Sn):	< = 3
Max output current:	200 mA
Absorption:	< 15 mA @ 24Vdc
Voltage drop:	< 1.8 V
Short circuit protection:	Present
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	IP 65
Housing material:	Nickelled brass
Mechanical characteristics:	M12x1
Connection type:	K plug
Weigth:	55 g



Part number: I12000074 - Model: SI12-C2 PNP NO+NC K

WIRING DIAGRAM

CONNECTION WITH K PLUG

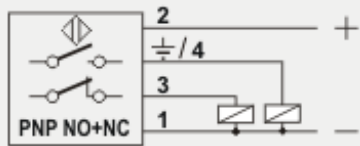

VIEW OF MALE CONNECTOR

- 1 = Blue / -
- 2 = Brown / +
- ≡/4 = Black / output NO
- 3 = White / output NC

INSTRUCTIONS FOR CORRECT INSTALLATION

INSTRUCTIONS FOR CORRECT INSTALLATION

EMBEDDABLE

