




**Part number: I12000719 - Model: SI12SS-DCE8 PNP NO H S**

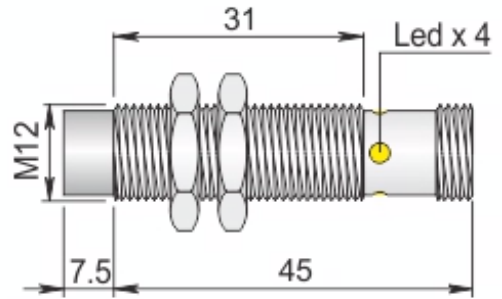

Dimension in mm

### TECHNICAL CHARACTERISTICS



Power supply:	Direct current
Working voltage:	10 ÷ 30 Vdc
Switching distance (mm):	8
Output logic:	PNP
Function:	NO
Hysteresis (%Sn):	< 10%
Max switching frequency:	600 Hz
Repeatability (%Sn):	< = 3
Max output current:	200 mA
Absorption:	< 15 mA @ 24Vdc
Voltage drop:	< 1.8 V
Short circuit protection:	Present
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	Depending on connector
Housing material:	Stainless steel
Mechanical characteristics:	M12x1
Connection type:	H plug
Weigth:	35 g



Part number: I12000719 - Model: SI12SS-DCE8 PNP NO H S

## WIRING DIAGRAM

### CONNECTION WITH H PLUG

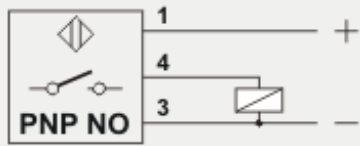


VIEW OF MALE CONNECTOR

- 1 = Brown / +
- 3 = Blue / -
- 4 = Black / output NO


## INSTRUCTIONS FOR CORRECT INSTALLATION

### INSTRUCTIONS FOR CORRECT INSTALLATION

#### NOT EMBEDDABLE



Side by side mounting

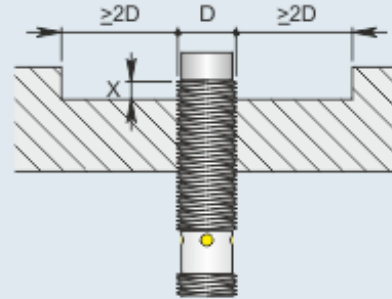

$X \geq 4\text{mm}$

Non flush mounting