


**Part number: I3000070 - Model: SI30-CE15 NPN NO H**




| <b>TECHNICAL CHARACTERISTICS</b> |                        |
|----------------------------------|------------------------|
| Power supply:                    | Direct current         |
| Working voltage:                 | 10 ÷ 30 Vdc            |
| Switching distance (mm):         | 15                     |
| Output logic:                    | NPN                    |
| Function:                        | NO                     |
| Hysteresis (%Sn):                | < 10%                  |
| Max switching frequency:         | 300 Hz                 |
| Repeatability (%Sn):             | < = 3                  |
| Max output current:              | 200 mA                 |
| Absorption:                      | < 15 mA @ 24Vdc        |
| Voltage drop:                    | < 1.8 V                |
| Short circuit protection:        | Present                |
| Led indicator:                   | Present                |
| Temperature limits:              | -25 ÷ +70 °C           |
| IP rating:                       | Depending on connector |
| Housing material:                | Nickelled brass        |
| Mechanical characteristics:      | M30x1.5                |
| Connection type:                 | H plug                 |
| Weigth:                          | 160 g                  |

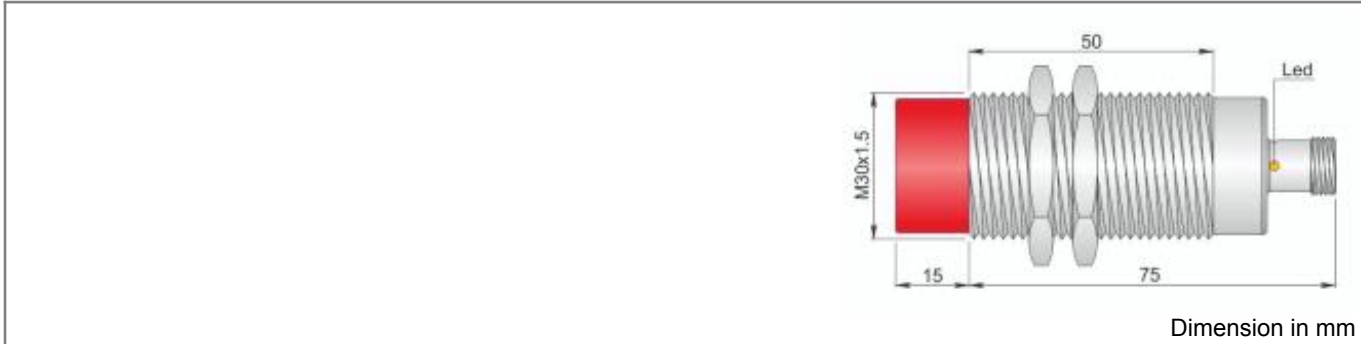

Part number: I30000070 - Model: SI30-CE15 NPN NO H

**WIRING DIAGRAM**

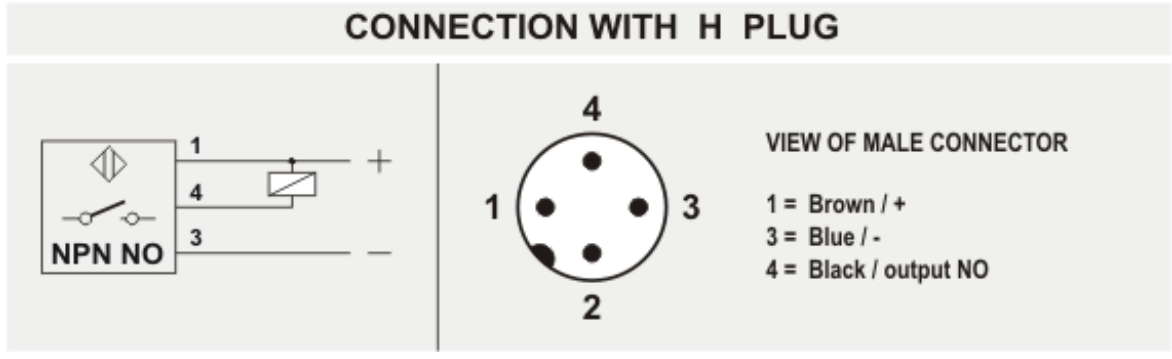

**INSTRUCTIONS FOR CORRECT INSTALLATION**

