



Part number: SIP000032 - Model: SIPC8-C2 NPN NO H1





TECHNICAL CHARACTERISTICS	
Power supply:	Direct current
Working voltage:	6 ÷ 30 Vdc
Switching distance (mm):	2
Output logic:	NPN
Function:	NO
Hysteresis (%Sn):	< 10%
Max switching frequency:	2000 Hz
Repeatability (%Sn):	< = 3
Max output current:	200 mA
Absorption:	< 12 mA @ 24Vdc
Voltage drop:	< 1.8 V
Short circuit protection:	Present
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	Depending on connector
Housing material:	Anodized anticorodal
Mechanical characteristics:	SIPC 8x8x40
Connection type:	H1 plug
Weigth:	20 g



Part number: SIP000032 - Model: SIPC8-C2 NPN NO H1

WIRING DIAGRAM

CONNECTION WITH H1 PLUG

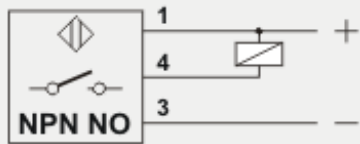

VIEW OF MALE CONNECTOR

- 1 = Brown / +
- 3 = Blue / -
- 4 = Black / output NO

INSTRUCTIONS FOR CORRECT INSTALLATION

INSTRUCTIONS FOR CORRECT INSTALLATION

Type SIPC8

