





Part number: SIP000085 - Model: SIP40-AE20 NO/NC LC2

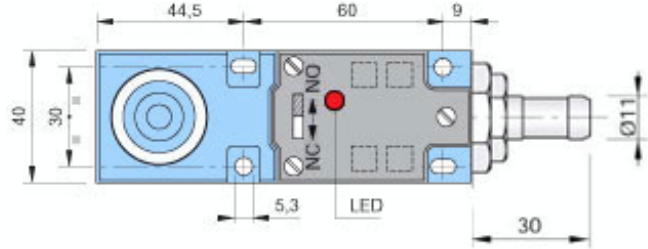

Dimension in mm


TECHNICAL CHARACTERISTICS

Power supply:	Alternating current
Working voltage:	20 ÷ 250 Vac
Switching distance (mm):	20
Function:	NO/NC programmable
Hysteresis (%Sn):	< 10%
Max switching frequency:	12 Hz
Repeatability (%Sn):	< = 3
Max output current:	300 mA
Voltage drop:	< 6 V
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	IP 67
Housing material:	Plastic
Mechanical characteristics:	SIP 40x40x114
Connection type:	Cable 2 m
Cable type:	2x0.50 PVC
Weight:	280 g




Part number: SIP000085 - Model: SIP40-AE20 NO/NC LC2

WIRING DIAGRAM

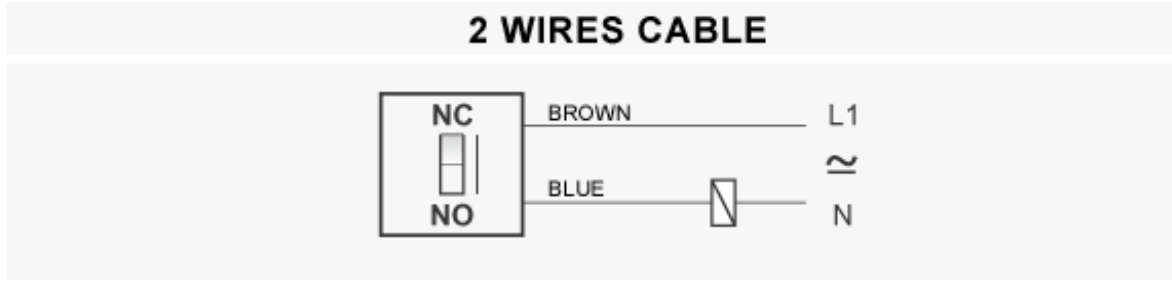

INSTRUCTIONS FOR CORRECT INSTALLATION


INSTRUCTIONS FOR CORRECT INSTALLATION

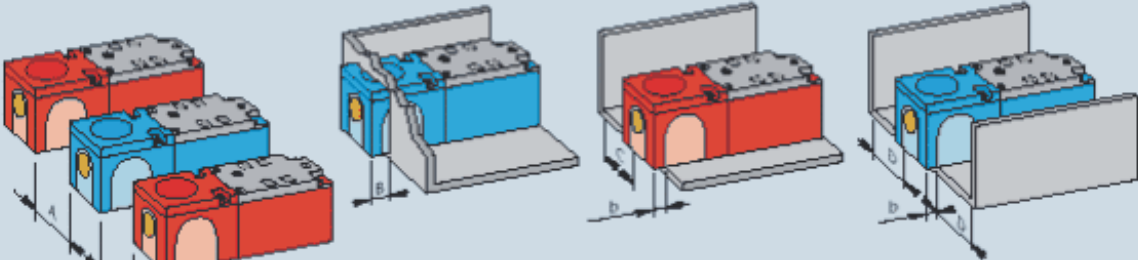

Dimensions mm	AB	b	C	D	
SIP 40 ▲	≥30	≥6	≥0	≥0	≥0
SIP 40 ●	≥50	≥40	≥15	≥10	≥15

• The installation example makes reference to the areas marked yellow

ADJUSTABLE SENSITIVITY SIP 40

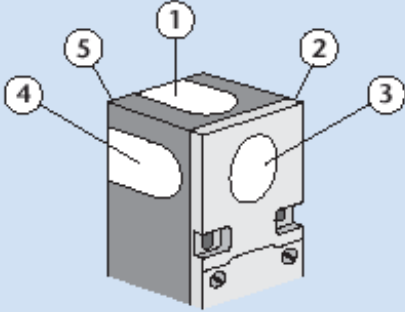

NOTE: In the SIP 40 sensor the oscillator is contained in a module which clips into the body whose surface can then be sensitive on five different positions. The surface chosen can be identified by applying the circular adhesive label.