



Part number: SIP000226 - Model: SIP25-C5 PNP NO+NC LC10




TECHNICAL CHARACTERISTICS	
Power supply:	Direct current
Working voltage:	10 ÷ 30 Vdc
Switching distance (mm):	5
Output logic:	PNP
Function:	NO+NC
Hysteresis (%Sn):	< 10%
Max switching frequency:	1000 Hz
Repeatability (%Sn):	< = 3
Max output current:	200 mA
Absorption:	< 15 mA @ 24Vdc
Voltage drop:	< 1.8 V
Short circuit protection:	Present
Led indicator:	Present
Temperature limits:	-25 ÷ +70 °C
IP rating:	IP 67
Housing material:	Nickelled brass
Mechanical characteristics:	SIP 25x50x10
Connection type:	Cable 10 m
Cable type:	4x0.25 PVC
Weighth:	340 g



Part number: SIP000226 - Model: SIP25-C5 PNP NO+NC LC10

WIRING DIAGRAM


4 WIRES CABLE - LOGIC PNP NO+NC

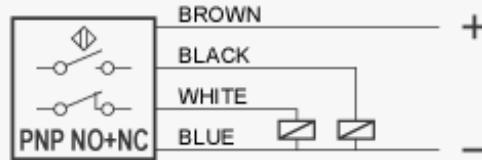

INSTRUCTIONS FOR CORRECT INSTALLATION

INSTRUCTIONS FOR CORRECT INSTALLATION

TYPE SIP25

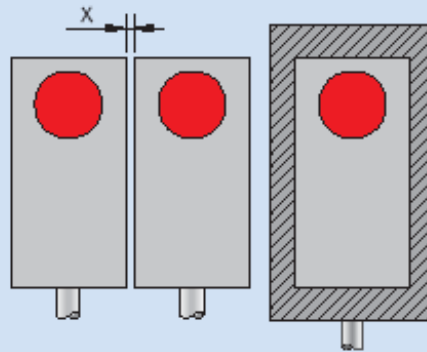

▲ $X \geq 5 \text{ mm}$