




**Part number: CAP000023 - Model: SC30M-A25NO/NC K**

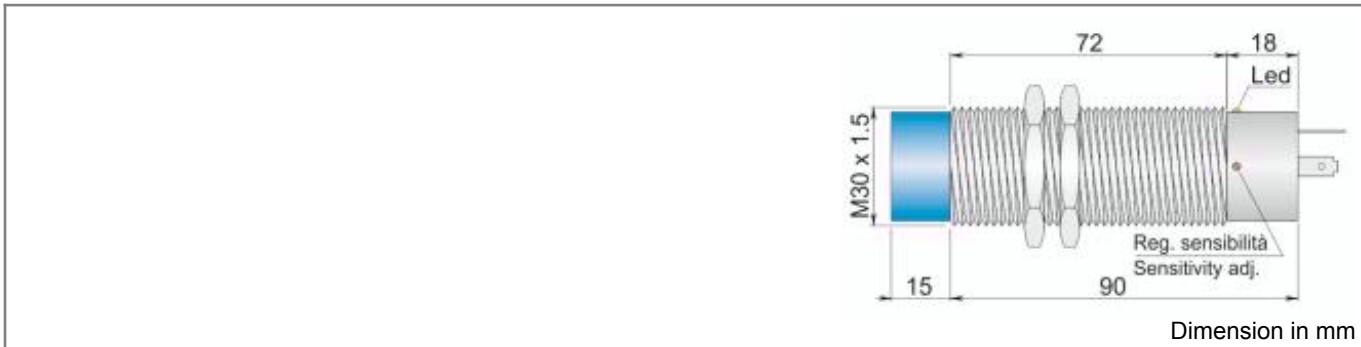


**TECHNICAL CHARACTERISTICS**

Working voltage:	20 ÷ 250 Vac/dc
Output type:	AC/DC
Function:	NO/NC programmable
Actuation type:	Instantaneous
Sensing distance (mm):	0 ÷ 25 (adjustable)
Hysteresis (%Sn):	< = 20
Max. switching frequency:	10 Hz
Repeatability (%Sn):	< 10
Max. output current:	500 mA
Min. output current:	10 mA (minimum current for release)
Max peak current for 20msec:	1.5 A
Residual current:	< = 2 mA
Voltage drop:	< 6 V
Led indicator:	Yellow
Shielding:	Not embeddable
Mechanical characteristics:	M30x1.5
Housing material:	Nickelled brass
Connection type:	K plug
Temperature limits:	-20 ÷ +70 °C
IP rating:	IP 65
Weight:	260 g



**Part number: CAP000023 - Model: SC30M-A25NO/NC K**

**WIRING DIAGRAM**

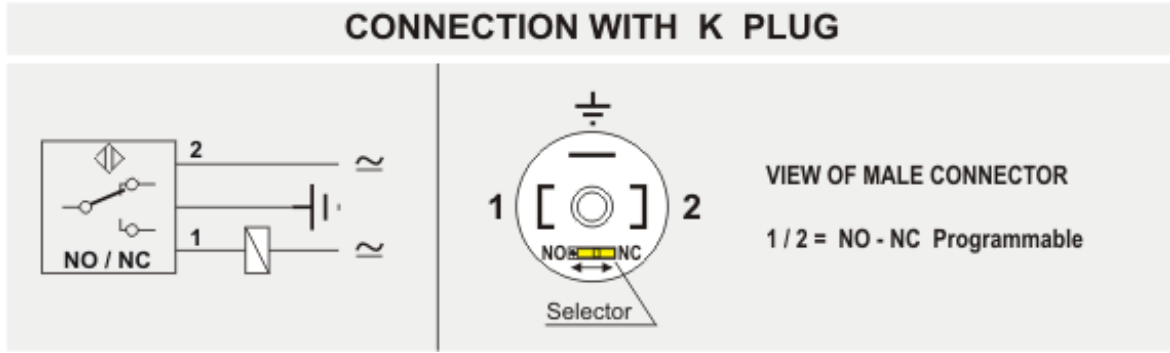

**INSTRUCTIONS FOR CORRECT INSTALLATION**

