

Part number: CAP000025 - Model: SC30P-A25NO/NC K




| TECHNICAL CHARACTERISTICS | |
|----------------------------------|-------------------------------------|
| Working voltage: | 20 ÷ 250 Vac/dc |
| Output type: | AC/DC |
| Function: | NO/NC programmable |
| Actuation type: | Instantaneous |
| Sensing distance (mm): | 0 ÷ 25 (adjustable) |
| Hysteresis (%Sn): | < = 20 |
| Max. switching frequency: | 10 Hz |
| Repeatability (%Sn): | < 10 |
| Max. output current: | 500 mA |
| Min. output current: | 10 mA (minimum current for release) |
| Max peak current for 20msec: | 1.5 A |
| Residual current: | < = 2 mA |
| Voltage drop: | < 6 V |
| Led indicator: | Yellow |
| Shielding: | Not embeddable |
| Mechanical characteristics: | M30x1.5 |
| Housing material: | Plastic |
| Connection type: | K plug |
| Temperature limits: | -20 ÷ +70 °C |
| IP rating: | IP 65 |
| Weight: | 260 g |



Part number: CAP000025 - Model: SC30P-A25NO/NC K

WIRING DIAGRAM

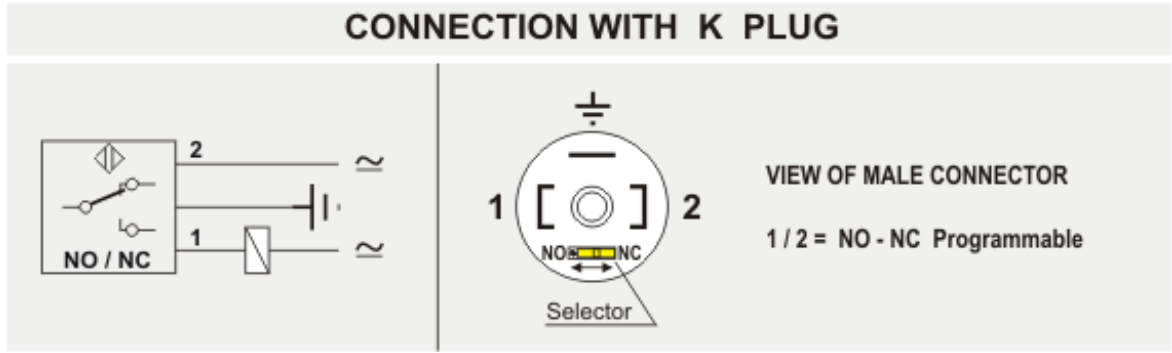

INSTRUCTIONS FOR CORRECT INSTALLATION

