

S7-C


Socket for 8-pin Relays

Rated Load	10A, 16A for 1 pole / 250 V
Specifications	
Rated impulse withstand voltage	
– All terminals / DIN rail	2.5 kV rms / 1 min
– Terminal / Terminal	2.5 kV rms / 1 min
Cross-section of connecting wire	
– Single-wire	4 mm ² / AWG 12, 2 x 1.5 mm ² / AWG 16
– Multi wire	2.5 mm ² / AWG 14, 2 x 1 mm ² / AWG 18
Nominal screw torque	0.7 Nm
Screw Dimensions (mm)	M3 Pozi slot
Mounting	TS-35 or Back Panel Mounting
Ambient temperature operation/storage	-40...60°C (50°C for 16A)/-40...80°C (no ice)
Weight	37g


Included Accessories	
Retaining clip, plastic	CP-07B for C7 / C7x Relays

Optional Accessories	
Retaining clip, plastic	CP-07B (BAG 50 PCS) for C7 / C7x Relays
A2-Connector	S7-BB (BAG 20 PCS)
Panel Adapter	S9-G (BAG 10 PCS)


Please Note:
This socket replaces former socket S7-M and S7-16

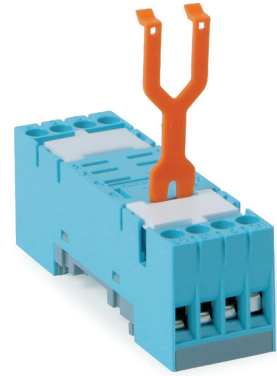

Connection diagram

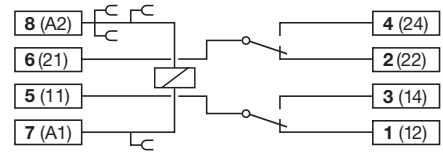

Dimensions (mm)

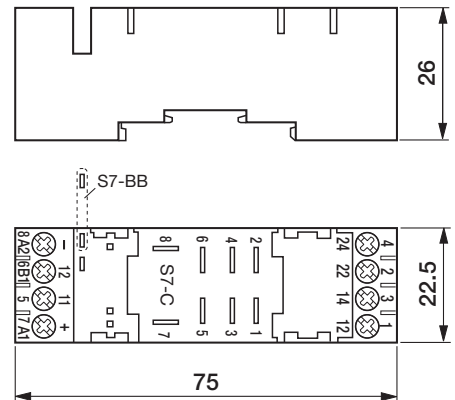

Technical approvals, conformities

