

S9-M

Socket for 14-pin Relays

Rated Load 6 A / 250 V

Specifications


Rated impulse withstand voltage	2.5 kV rms / 1 min
- All terminals / DIN rail	2.5 kV rms / 1 min
- Terminal / Terminal	2.5 kV rms / 1 min
Cross-section of connecting wire	
- Single-wire	4 mm ² / AWG 12 or 2 x 2.5 mm ² / AWG 14
- Multi-wire	0.34mm ² / 22 - 2.5 mm ² / AWG 14
Nominal screw torque	0.7 Nm
Screw Dimensions (mm)	M3 Pozi slot
Mounting	TS-35 or Back Panel Mounting
Ambient temperature operation/storage	-40 ... 60 °C / -40 ... 80 °C (no ice)
Weight	54g

Included Accessories


Retaining clip, plastic S9-C for C9 / C9x Relays

Optional Accessories



Retaining clip, plastic S9-C (BAG 10 PCS) for C9 / C9x Relays
 Panel Adapter S9-G (BAG 10 PCS)
 Bridge Bar S9M-V1 (BAG 5 PCS)
 Bridge Bar S9M-V4 (BAG 5 PCS)
 Bridge Bar S9M-BX (BAG 5 PCS)

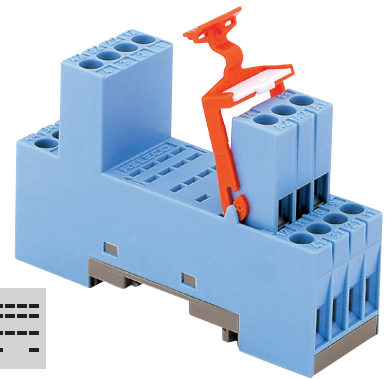

Connection diagram

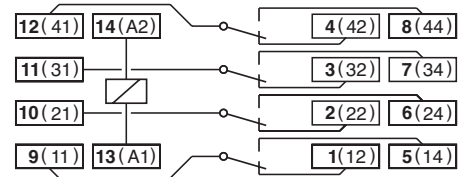

Dimensions (mm)

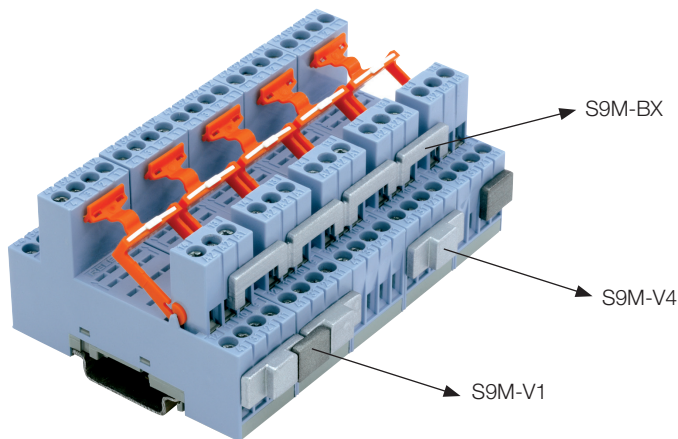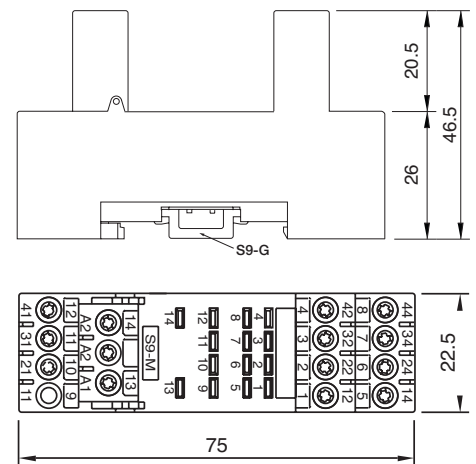

Technical approvals, conformities

