


CDE05

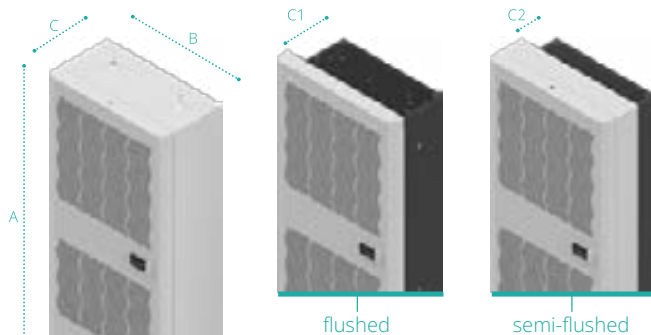

CODE		M.U.	CDE05U320380000	CDE05A322080000		CDE05U322080000	
UL LISTED			✓	--		✓	
Rated Voltage		V, ~	115,1	230,1		230,1	
Nominal Frequency		Hz	60	50	60	50	60
Cooling Capacity	L35L35	W	520	600	670	--	670
Cooling Capacity	L35L50	W	420	510	540	--	540
Power Consumption	L35L50	W	350	380	420	--	387
Max current consumption.		A	4	2,3 (2,4 60°C)	2,4	2,3 (2,4 60°C)	2,4
Start-up current	CE	A	--	7,5		7,5	
Internal operating temp..	min/max	°C	25/45	25/45		25/45	
External operating temp.	min/max	°C	20/55	20/60	20/55	20/60	20/55
Protection Degree internal circuit	CE	IP	--	54		54	
	UL	Type	12	--		--	12
External sound pressure		dB(A)	54	54		54	
Height (A)		mm	956	956		956	
Width (B)		mm	375	375		375	
Depth (C - C1 - C2)		mm	196 - 155 - 89	196 - 155 - 89		196 - 155 - 89	
Weight		kg	30	30		30	