


CDE10

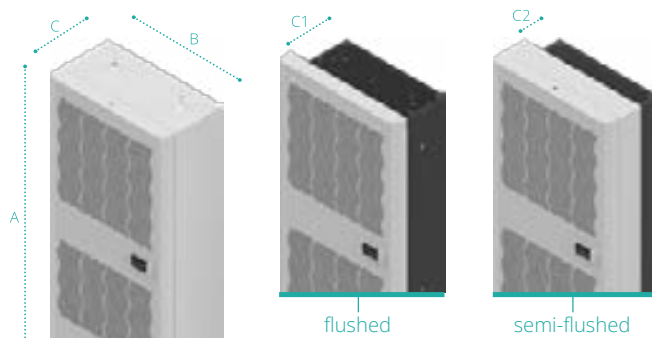

CODE		M.U.	CDE10U320380000	CDE10A322080000		CDE10U322080000	
UL LISTED			✓	--		✓	
Rated Voltage		V, ~	115,1	230,1		230,1	
Nominal Frequency		Hz	60	50	60	50	60
Cooling Capacity	L35L35	W	975	1000	1050	---	1050
Cooling Capacity	L35L50	W	700	720	800	---	800
Power Consumption	L35L50	W	551	595	710	---	730
Max current consumption		A	5,74	3,5 (3,6 60°C)	4	3,5 (3,6 60°C)	4
Start-up current	CE	A	---	20		20	
Internal operating temp..	min/max	°C	25/40	25/45		25/45	
External operating temp.	min/max	°C	20/50	20/60	20/55	20/60	20/55
Protection Degree internal circuit	CE	IP	---	54		54	
	UL	Type	12	---		---	12
External sound pressure		dB(A)	56	56		56	
Height (A)		mm	956	956		956	
Width (B)		mm	375	375		375	
Depth (C - C1 - C2)		mm	196 - 155 - 89	196 - 155 - 89		196 - 155 - 89	
Weight		kg	34	34		34	